

# JungleFlasher v0.1.74

(x86 and x64 Compatible)



Complete User Guide

(v0.1.3.8b)

## **USING THIS TUTORIAL!**

**DO NOT TRY** to read this tutorial by scrolling through all the pages!

**It is not sequential in any way!**

Use the flowchart links and links at bottom of each section to take you directly to the correct instructions for your situation!

Trying to read through each page regardless IS POINTLESS!

## **USE THE LINKS!**

**I AM A NEW USER OF  
JUNGLEFLASHER**

**[CLICK HERE](#)**

**USED JUNGLEFLASHER  
BEFORE**

**[CLICK HERE](#)**

## Introduction

JungleFlasher is developed in conjunction with Team Jungle in an effort to bring all 360 DVD-Drive flashing functions together in one easy to use Win32 Application. JungleFlasher provides several functions that up until now were carried by several different app's in both Dos and Win32. Recent changes allow JungleFlasher to be fully functional in a x64 environment.

The **FirmwareTool 32** tab is used to process firmware files. Jungle Flasher will parse the files, identify the firmware type and display relevant information such as the all important DVD key and OSIG strings etc... On the Target sub-tab, MD5 hash checking of iXtreme firmware files is conducted to confirm authenticity. With both source and target files loaded, the relevant source data can be transferred to the Target (a.k.a. Spoofed), which can then be flashed to the target drive.

The **DVDKey32** tab is used to extract info from LiteOn - the undumpable drive. All unique information is extracted: DVD key, unique inquiry and identify strings and drive serial information. This info is stored in one easy to use file, "Dummy.bin". This is a 256kb file that mimics the approximate structure of a BenQ firmware file and is automatically loaded to the source sub-tab in the FirmwareTool 32 Tab. Jungle Flasher v0.1.55b also brought the unique feature of dumping "Dummy.bin" from iXtreme flashed LiteOn Drives solely using S-ATA. There is also a facility to create a "dummy.bin" from previously extracted files, although fresh extractions should be completed where possible. Every effort has been made to make key extraction as reliable as possible. Multiple Dumps are no longer required as a Key verification routine is now in place that verifies the Key against the Drive itself.


The **MTKFlash 32** tab is used to unlock Benq and Samsung drives and then dump the current flash for use in the source sub-tab in FirmwareTool 32 tab. You can also erase a LiteOn in preparation for flashing. All 3 MTK Based drives can be flashed using this tab.

The **Hitachi GDR3120** tab is for Hitachi drives which are flashed differently from the MTK based drives mentioned above, therefore have their own dedicated tab. Hitachi's are flashed as a "Live" drive, on a sector by sector basis and as such needs to be performed in a very controlled way so the process is heavily automated. JungleFlasher will only flash iXtreme to a stock drive and so a restore facility is provided, which allows for a full restore to stock f/w of previously modded drives. Several additional features like setting Mode-B over PortIO, USmodeB and 79Unlock are included for convenience. Dumping and flashing is also possible over PortIO for those who removed VIA drivers to work around Lite-On-Erase lockup issues.

JungleFlasher is intended to be rich in information providing as much relevant and useful information as possible. On the DVDKey 32 and MTKFlash 32 tabs, all I/O and COM port information is detected and displayed, as well as drive and device properties for the currently selected drive.

## Overview of JungleFlasher and its functions

When you start JungleFlasher, you will be presented with **5 tabs**;  
**FirmwareTool32, DVDKey32, MTKFlash32, Hitachi GDR-3120L & IRC Channel.**




**FirmwareTool32** is used to view firmware details, manipulate these firmwares, and to save the firmware and/or details of the firmware.

It is split into 2 sections, Source and Target, with function buttons surrounding it.

Source, this is the originating firmware, this can be previously dumped firmware (containing console specific drive key, Drive string ID and serial data), original firmware, dummy firmware etc. This data should always mimic what the Xbox 360 should expect from the DVD Drive.

The Target area (buffer) should contain the firmware you wish to apply to the drive itself, this firmware will be manufacturer specific, BenQ firmware for BenQ drives / LiteOn firmware for LiteOn Drives etc. Hitachi Drives do not use FirmwareTool32 in the same manner; this is fully explained in Hitachi section.




**DVDKey32** is primarily used to obtain **Key.bin, Inquiry.bin, Identify.bin, Serial.bin and Dummy.bin** from earlier **LiteOn PLDS DG-16D2S** drives. It also has an option to rebuild from previous files (for people who used other, older applications or those who followed poor advice before. Newest LiteOn drives (83850C v2 and 93450C) need to be fully dumped and as such are dealt with using MTK Flash 32 tab.

JungleFlasher v0.165 brought the inclusion of **LO83info** for **LiteOn PLDS DG-16D2S 83850c V1 drives** (83850C V1 occurred up to around Jul/Aug 09 drive manufacture dates). This hack being used for obtaining the unique data from the 83850C V1 drive revision. With JungleFlasher v0.1.66b incorporating Seacrest's OpenKey, used to decrypt the obtained file.

Jungleflasher v0.174 brought a **Key verification routine** which tests the keys, primarily on **Lite-On** drives but is also applied to **pre-78 Hitachi** drives and **Samsung** drives and can be verified on **Benq** too (though not automated like **Lite-on**) Using this ability it's now possible to create a new Dummy.bin from the key database and **Verify** that it is correct.

There are also 4 checkboxes found in this tab, **VIA Ports Only** and **Include non-IDE ports**, added for extra safety and compatibility; **USB Xtractor Switch** – for use with the Maximus USB Xtractor Push Button to extract feature this launches the DVDKey32 command from the Hardware Device itself. The final one being **Dummy.bin Only** – this being a cleaner method of storing files as Dummy.bin incorporates the other files obtained.




**MTKFlash32** contains a variety of functions, from unlocking and reading of **BenQ** and **Samsung** drives using their dedicated **Unlock** buttons, or **LiteOn** drives after placing them in Vendor Mode (using MRA Hack).

MTKFlash32 is also where you are able to send the Intro of Death (a.k.a LiteOn Erase) to the **LiteOn PLDS DG16-D2S** after obtaining DVDKey, and for writing to the drive after Intro of Death, or once drive placed in Vendor Mode using MRA Hack.

MTKFlash32 will also **erase** and **write Samsung** and **BenQ and LiteOn** drives, once the drives have been unlocked/placed in vendor mode.

MTKFlash32 will show, in the lower left section, the details of the drive inquiring on the respective **I / O Port** listed above. This is where you will identify which S-ATA Port to use for carrying out the process.



**Hitachi GDR3120** As mentioned previously, the Hitachi Drives are flashed completely differently to the MTK Based drives; Hitachi's are flashed as a "Live Drive" on a sector by sector basis.

For this reason, JungleFlasher has its own dedicated Hitachi tab, all the flashing options you may need to do can be done under this tab.

As with the other Tabs, JungleFlasher will show the I/O port list for identifying what S-ATA Port your drive is on.

It also incorporates a **Raw Mode-B** command for putting a drive into **Mode-B** and automates the Play/Pause/Eject for **79Unlock** – Audio Disc still required!

Once the drive is actually in **Mode-B** you can use the flashing options located in this section of the application, the options themselves are pretty self explanatory.

With the **Firmware Pack** installed, JungleFlasher will automatically load the correct iXtreme file for your drive, or Original Firmware if restoring.

With the release of JungleFlasher 1.71, there is now a IRC Channel tab within the actual program. If you have **read this tut and still cannot figure out your problem**, please feel free to use the chat function and get some live support with your problem. Please DO NOT expect us to help you if you have not even tried to research your problem! There is a huge amount of information in this tutorial and the vast majority of methods are covered for almost all situations.

**NOTE:** If requesting advice/help in IRC Channel – PLEASE – give a good description of your setup- OS, Drive, FW, SATA chipset, Difficulty you’re experiencing etc. DO NOT – give a single line of info and expect people to magically know what your problem is!



## **BEFORE USING JUNGLEFLASHER**

### **You Must Have .net framework installed**

- .net framework 2.0 or later for Windows XP machines
- .net framework 3.5 SP1 on Windows Vista Machines
- .net framework is built-into Windows 7 (easy life!)

### **JungleFlasher Firmware Pack (vital for Hitachi Drives)**

Download the latest iXtreme firmwares from usual sources – place all the .bin files into the firmware folder that is inside the JungleFlasher folder! (This allows for auto-loading of firmware as well as being essential for operation during Hitachi manipulation/flashing)


### **If you are using a VIA card - remove the drivers!**

It is advisable as the drivers tend to cause problems on a lot of drives but very noticeable with erased LiteOn, causing the infamous 'Lite-On + VIA Freeze'


[CLICK HERE TO FIND OUT HOW TO DO IT PROPERLY](#)

***LEAVE ALL these files in same directory as jungleflasher.exe***

***Place all the individual .bin firmware files inside the firmware folder!***

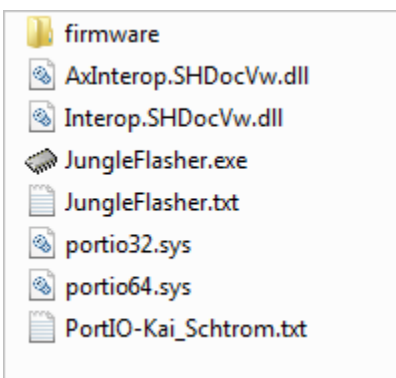


***If using ANY Operating System other than Win XP x86 you must right-click on Jungleflasher Icon and select "Run as Administrator"***

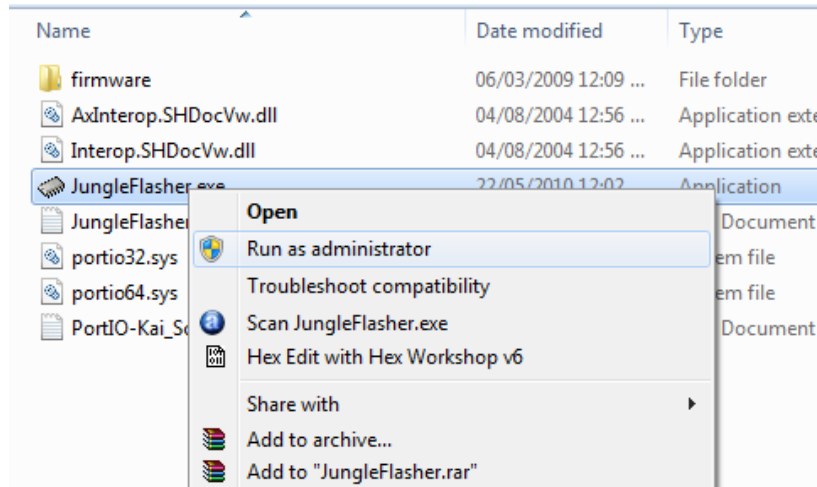

**OR**

Right click on icon, select properties > compatibility, tick the box, press ok

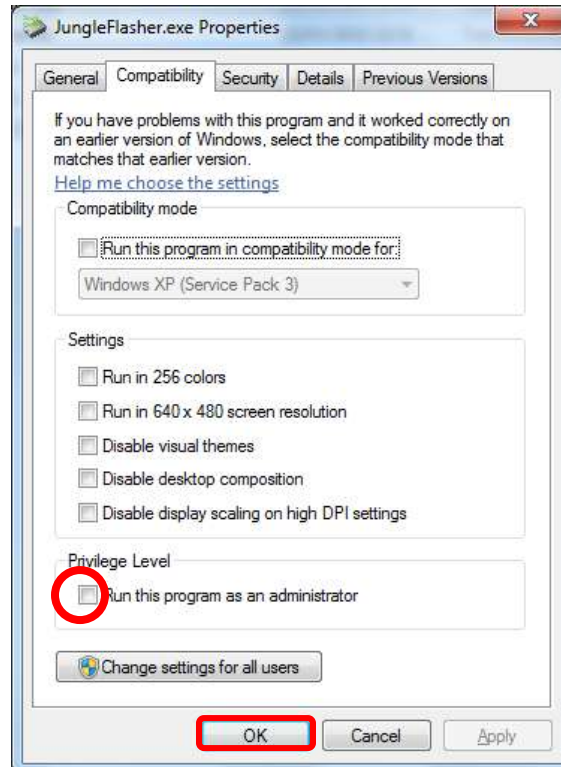

[CLICK HERE FOR ADDITIONAL INSTRUCTIONS FOR USE WITH x64 VISTA/WIN 7](#)



WHEN you run Jungleflasher you MUST ensure PortIOXX\*.sys is RUNNING!

You can do this easily by looking at the log at the bottom of the window (as shown)

\* XX - will be either 32 (for x86 operating systems) or 64 (for x64 operating systems)

```
~~~~~
JungleFlasher 0.1.74 Beta (138)
Session Started Sat May 22 07:48:38 2010

This is a 32 bit process running on 4 x 32 bit CPUs
portio32.sys Driver Installed
portio32.sys Driver Started, thanks Schtrom !
Found 0 Com Ports.
```

### **Other Info – for troubleshooting, or the inquisitive mind**

<a href="#">FAQ's</a>	<a href="#">Advanced User Functions</a>	<a href="#">VIA Ports Only / Include Non-IDE</a>	<a href="#">X64 additional instructions</a>
<a href="#">Support for earlier LiteOn dumps</a>	<a href="#">Missing Serial Data</a>	<a href="#">Return a LiteOn to Stock</a>	<a href="#">Verified Lite-On Key?</a>
<a href="#">Manual Spoofing</a>	<a href="#">Spoofing a Hitachi</a>	<a href="#">Spoofing a different drive</a>	<a href="#">Thanks</a>

**[CONTINUE](#)**

### Which Drive

**Samsung** [CLICK HERE](#)

**Hitachi** [CLICK HERE](#)

**BenQ** [CLICK HERE](#)

**LiteOn** [CLICK HERE](#)



**You can check the Xbox 360 DVD drive type by removing the faceplate and checking the hole underneath the DVD bezel.**

**Red and Black Wires = Samsung**

**No Wires = Hitachi**

**White Wires = BenQ**

**Yellow Wires = LiteOn**

For **Exact** model information of drive you must read the label on top of the drive case!

You will require this information to enable you to choose the correct methods for your drive!

## **Samsung (TS-H943) MS25 /MS28.**

### **Overview.**

The steps to modifying / restoring a Samsung Drive follow the basic outline of:

- Unlocking the Drive (MS28 or Xtreme 3.3+ Firmwares)
- Reading the Original firmware
- Patching Key into hacked Firmware
- Writing Drive

The tutorial covers multiple unlock methods, which are dependent upon which drive, its current firmware and your SATA chipset!


The following flowchart will help you decide which method you should use to achieve the unlocked state on a Samsung drive (Vendor Mode – status 0x70) in preparation for READING and/or WRITING to, the drive

### **Now, we can proceed to modifying the drive.**

Power drive with it connected to PC via SATA then open JungleFlasher.exe. You will be presented with the Welcome Screen.

After a few seconds the main window will load.


Follow the flowchart below to obtain the correct method for your setup and drive!

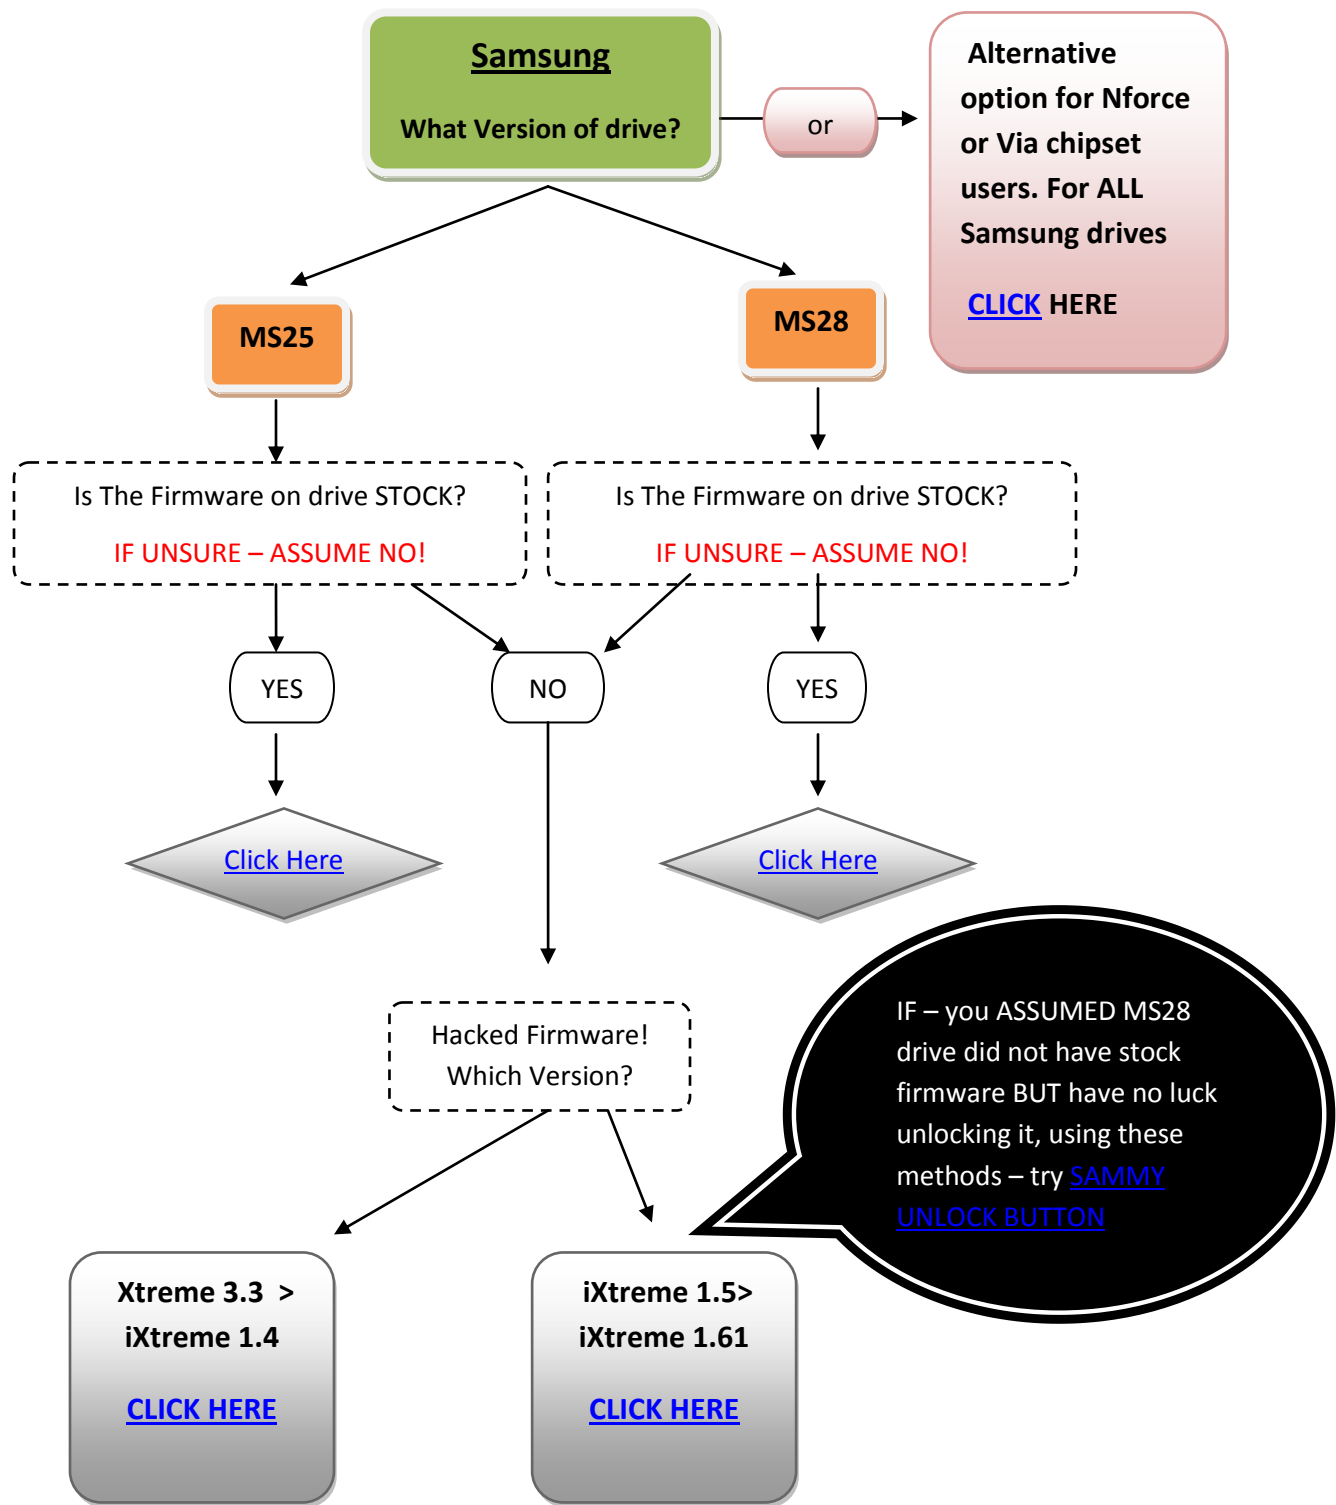

## Unlocking the drive.


Before we can do anything to the drive, it must be in Vendor Mode (status 0x70).

All Unlocking is taken place under the **MTKFlash 32** tab.

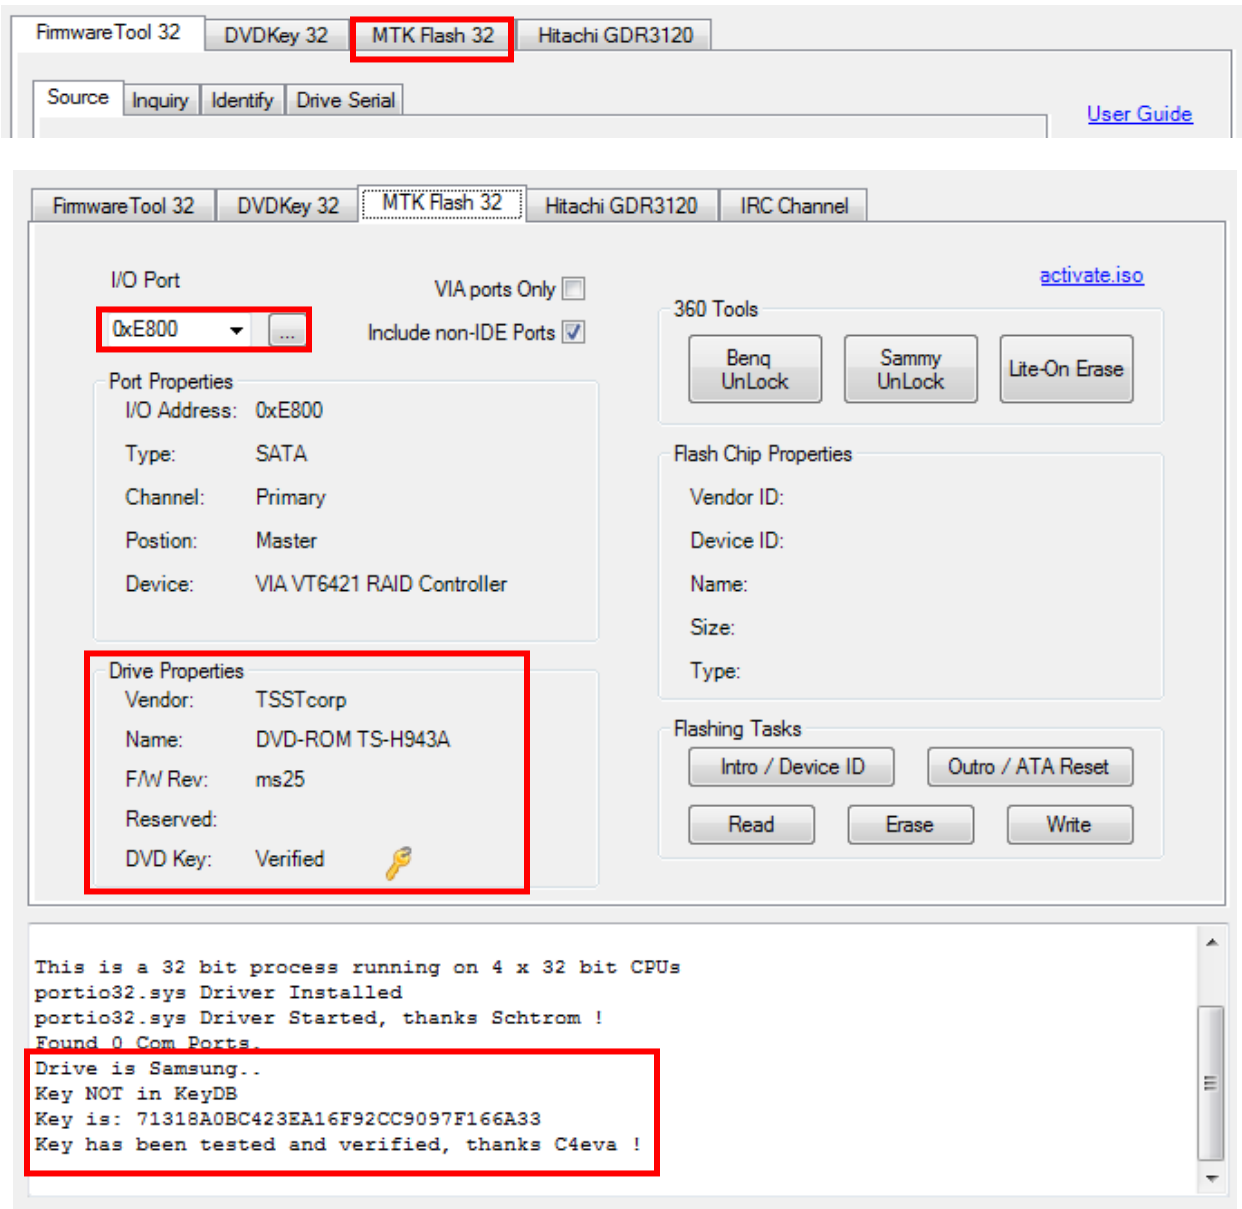

Note: Upon selecting the correct port the drive shows up and key is dumped and verified against the drive! (Before doing anything to the drive) – The firmware has NOT yet been dumped! However if you save the log you now have a known verified key from your drive.

Please note, unmodified **Samsung MS25's** have no **FirmGuard** therefore do not need an unlock method to be applied, simply click **Intro / DeviceID** and check flash chip properties for status 0x70.

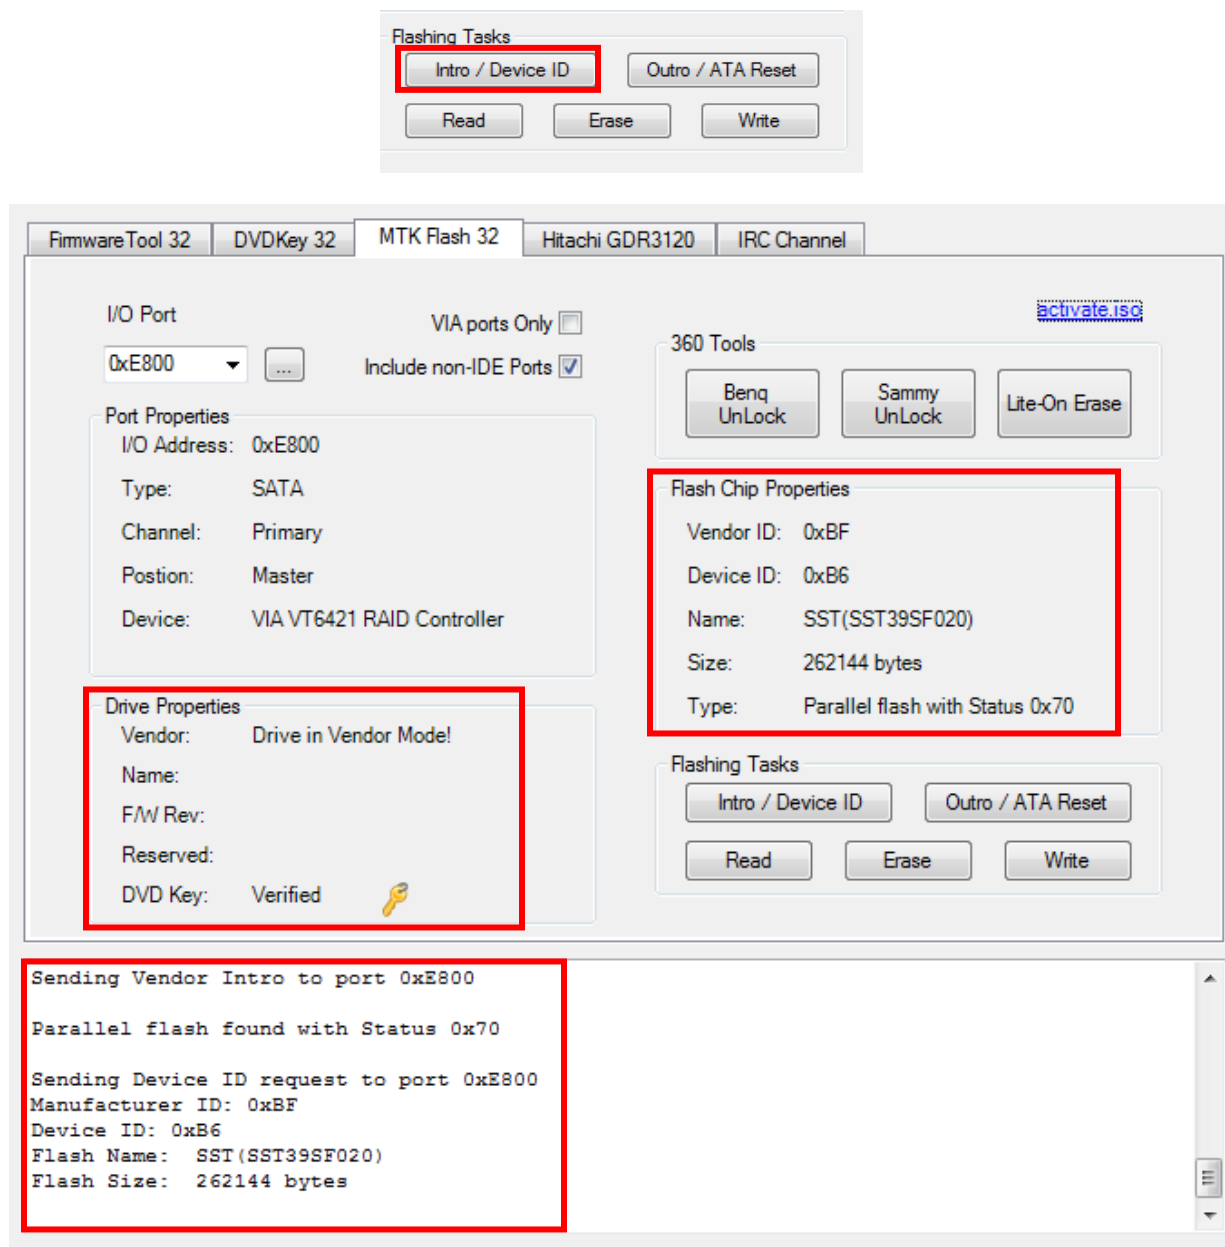

**[Now CLICK HERE to proceed](#)**

## Unlocking the drive.

Before we can do anything to the drive, it must be in Vendor Mode (status 0x70).

All Unlocking is taken place under the **MTKFlash 32** tab.

The screenshot displays the FirmwareTool 32 application with the 'MTK Flash 32' tab selected. The interface includes several sections:

- I/O Port:** A dropdown menu showing '0xE800'.
- VIA ports Only:** A checkbox that is currently unchecked.
- Include non-IDE Ports:** A checkbox that is checked.
- Port Properties:** A section showing details for the selected port: I/O Address: 0xE800, Type: SATA, Channel: Primary, Position: Master, Device: VIA VT6421 RAID Controller.
- Drive Properties:** A section showing details for the detected drive: Vendor: TSSTcorp, Name: DVD-ROM TS-H943A, F/W Rev: ms28, Reserved: , DVD Key: Verified (indicated by a key icon).
- Flash Chip Properties:** A section for chip details, currently empty.
- Flashing Tasks:** A section with buttons for 'Intro / Device ID', 'Outro / ATA Reset', 'Read', 'Erase', and 'Write'.
- Console Output:** A text area at the bottom showing the following messages:

```
This is a 32 bit process running on 4 x 32 bit CPUs
portio32.sys Driver Installed
portio32.sys Driver Started, thanks Schtrom !
Found 0 Com Ports.
Drive is Samsung..
Key NOT in KeyDB
Key is: 71318A0BC423EA16F92CC9097F166A33
Key has been tested and verified, thanks C4eva !
```

Note: Upon selecting the correct port the drive shows up and key is dumped and verified against the drive! (Before doing anything to the drive) – The firmware has NOT yet been dumped! However if you save the log you now have a known verified key from your drive.

simply click **Intro / DeviceID** and check flash chip properties for status 0x70.

Flashing Tasks

Intro / Device ID    Outro / ATA Reset

Read    Erase    Write

FirmwareTool 32    DVDKey 32    MTK Flash 32    Hitachi GDR3120    IRC Channel

I/O Port: 0xE800    VIA ports Only ☐    Include non-IDE Ports ☒    [activate.iso](#)

Port Properties

I/O Address: 0xE800

Type: SATA

Channel: Primary

Position: Master

Device: VIA VT6421 RAID Controller

360 Tools

Beng UnLock    Sammy UnLock    Lite-On Erase

Flash Chip Properties

Vendor ID: 0xBF

Device ID: 0xB6

Name: SST(SST39SF020)

Size: 262144 bytes

Type: Parallel flash with Status 0x70

Flashing Tasks

Intro / Device ID    Outro / ATA Reset

Read    Erase    Write

Drive Properties

Vendor: Drive in Vendor Mode!

Name:

F/W Rev:

Reserved:

DVD Key: Verified

Sending Vendor Intro to port 0xE800

Parallel flash found with Status 0x70

Sending Device ID request to port 0xE800

Manufacturer ID: 0xBF

Device ID: 0xB6

Flash Name: SST(SST39SF020)

Flash Size: 262144 bytes


**[Now CLICK HERE to proceed](#)**



## Stock MS28's (Unmodified).

### Sammy UnLock.

Select correct I/O Port (check for **TS-H943** in the Drive Properties) and click **Sammy UnLock**.

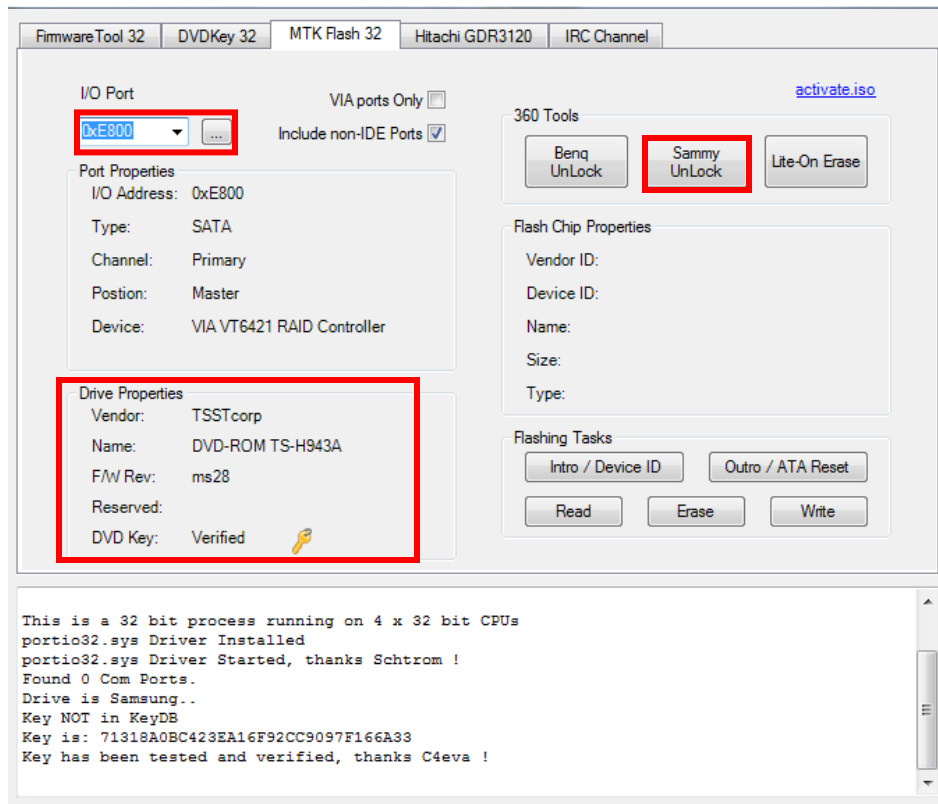

You will be presented with the following warning notifying you that Sammy UnLock only works on stock drives and how to unlock if using (i)Xtreme.



Select yes and watch the **Running Log** in JungleFlasher; this is a 'good' return message, JungleFlasher will also automatically send the intro command and put the drive in **Vendor Mode**.

```
Sending Sammy_Un_Lock to Drive on port 0xE800
Stage 1, Complete!
Stage 2, Complete!
Stage 3, Complete!
Done!
Sending Vendor Intro
```

The drive should be in Vendor Mode (0x70) now and return good flash chip properties; you can check under **Flash Chip Properties**, **Drive Properties** should show “**Drive in Vendor Mode!**”

The screenshot shows the 'MTK Flash 32' tab in a software application. The interface includes several sections:


- I/O Port:** A dropdown menu set to '0xE800' and a 'VIA ports Only' checkbox.
- Port Properties:** A box containing I/O Address (0xE800), Type (SATA), Channel (Primary), Position (Master), and Device (VIA VT6421 RAID Controller).
- Drive Properties:** A box containing Vendor (Drive in Vendor Mode!), Name, F/W Rev, Reserved, and DVD Key (Verified).
- Flash Chip Properties:** A box containing Vendor ID (0xBF), Device ID (0xB6), Name (SST(SST39SF020)), Size (262144 bytes), and Type (Parallel flash with Status 0x70).
- Flashing Tasks:** Buttons for 'Intro / Device ID', 'Outro / ATA Reset', 'Read', 'Erase', and 'Write'.
- 360 Tools:** Buttons for 'Benq UnLock', 'Sammy UnLock', and 'Lite-On Erase'.
- Log:** A text area at the bottom showing the progress of the operation, including 'Stage 2, Complete!', 'Stage 3, Complete!', 'Done!', and 'Sending Vendor Intro'.

Red boxes highlight the 'Drive Properties' and 'Flash Chip Properties' sections.

[Now CLICK HERE to proceed](#)

### **Xtreme 3.3 -> iXtreme 1.4 Unlock using Activate.iso.**

For this you need the Activate.iso found in the upper right hand corner of the **MTKFlash 32** tab,

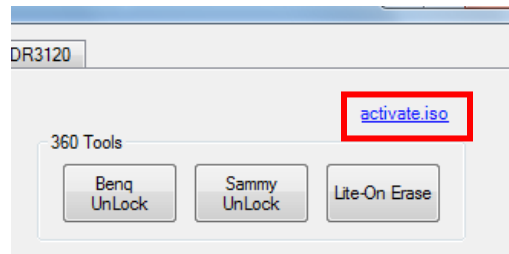


burnt to **Dual Layer + R Media** (this is vital for later firmwares). Simply burn it with no layerbreak settings, with all data present on first Layer, [IMGBurn](#) 2.5.0.0 will do this fine just select the ISO and confirm you want to burn to a large capacity disc with all data present on L0 (Layer 0).

Once burned, simply place it in your Samsung drive while connected to the PC, wait 30 seconds and run JungleFlasher.

### **Unlocking the drive.**


Before we can do anything to the drive, it must be in Vendor Mode (status 0x70).

All Unlocking is taken place under the **MTKFlash 32** tab.

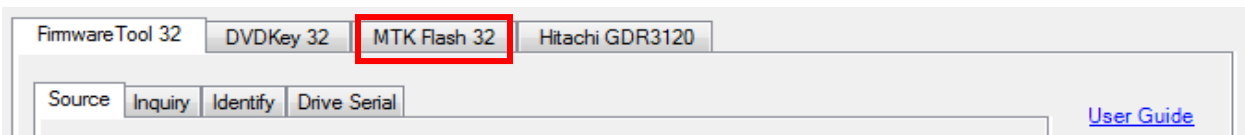


You will presented with a screen resembling this, select correct **I/O Port (check for TS-H943 in the Drive Properties)**

click **Intro / Device ID** and then check the **Running Log**.

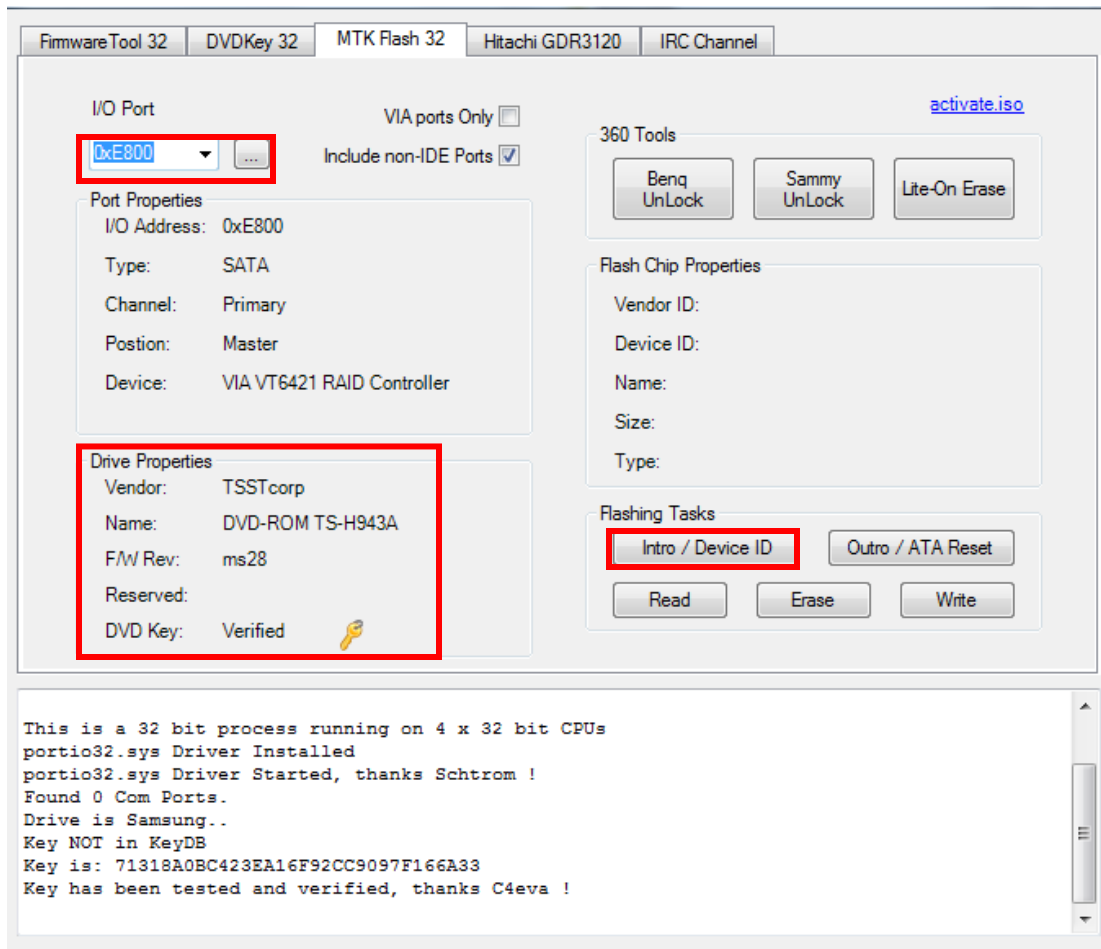

If Activate.iso worked correctly, you will get good **flash chip properties (0x70)** and drive will appear in **Vendor Mode** in **Drive Properties**.

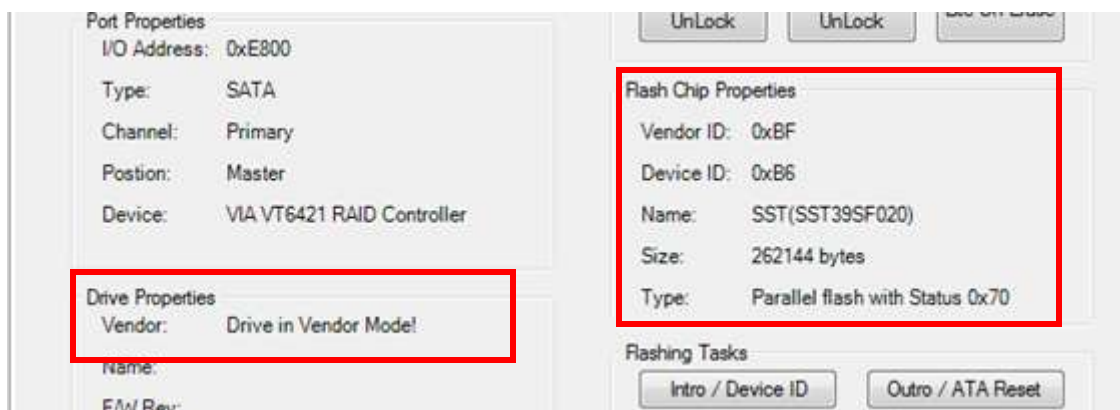

**[Now CLICK HERE to proceed](#)**

## Unlocking iXtreme 1.5 > 1.61

For this method, we still need to power on the drive with the “half open tray”.

### If using a 360 to power the drive

This method can be tricky to accomplish.

You need to power on the drive with **Eject status closed** but **Tray Half Open** – To do this using an Xbox 360 as Power source, eject the DVD drive, then, press eject to ‘close’ the tray. **Now this is the important part – you MUST remove the DVD power plug from the DVD Drive BEFORE it closes fully.**


Wait for a few seconds and replace the power plug into the DVD drive taking **extreme caution** to plug the plug the right way around – once done, the drive is now powered, console thinks its closed but it is in fact half open.

### If using a connectivity kit to power the drive

You need to power on the drive with **Eject status closed** but **Tray Half Open** – To do this using a connectivity kit as Power source, eject the DVD drive, then, press eject to ‘close’ the tray. **Now this is the important part – you MUST switch off the power BEFORE it closes fully.**

Wait for a few seconds and switch power on connectivity kit back on – once done, the drive is now powered, console thinks its closed but it is in fact half open.

Load JungleFlasher, and select **MTKFlash 32** tab.

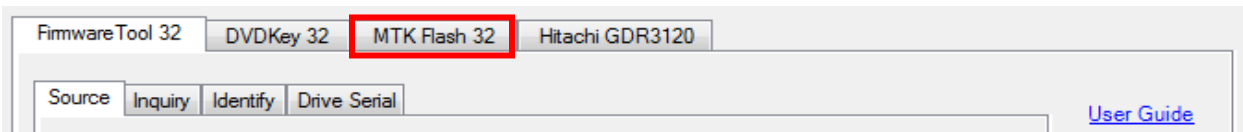

Press **Intro / Device ID** button



The drive should be in Vendor Mode (0x70) now and return good flash chip properties, you can check in the **Running Log** or **Flash Chip Properties**, The drive should also show as “**Drive In Vendor Mode!**” in the **Drive Properties**.

FirmwareTool 32   DVDKey 32   MTK Flash 32   Hitachi GDR3120   IRC Channel

I/O Port  
0xE800   ...   VIA ports Only ☐   Include non-IDE Ports ☒   [Activate.ISC](#)

Port Properties  
I/O Address: 0xE800  
Type: SATA  
Channel: Primary  
Position: Master  
Device: VIA VT6421 RAID Controller

Drive Properties  
Vendor: Drive in Vendor Model  
Name:  
F/W Rev:  
Reserved:  
DVD Key: Verified

360 Tools  
Benq UnLock   Sammy UnLock   Lite-On Erase

Flash Chip Properties  
Vendor ID: 0xBF  
Device ID: 0xB6  
Name: SST(SST39SF020)  
Size: 262144 bytes  
Type: Parallel flash with Status 0x70

Flashing Tasks  
Intro / Device ID   Outro / ATA Reset  
Read   Erase   Write

Sending Vendor Intro to port 0xE800  
Parallel flash found with Status 0x70  
Sending Device ID request to port 0xE800  
Manufacturer ID: 0xBF  
Device ID: 0xB6  
Flash Name: SST(SST39SF020)  
Flash Size: 262144 bytes

**[Now CLICK HERE to proceed](#)**


## DeviceID Unlock / Vcc Trick (VIA/Nforce only) Stock + Modified Drives.

This method has only really been tested on VIA (no drivers, or 530c drivers) and Nforce Chipsets, although there is no harm in trying on others, this method works on Hacked and Stock Drives.


Load JungleFlasher, and select **MTKFlash 32** tab.



Select correct **I/O Port** (check for **TS-H943** in Drive Properties) and click **Intro / Device ID**.

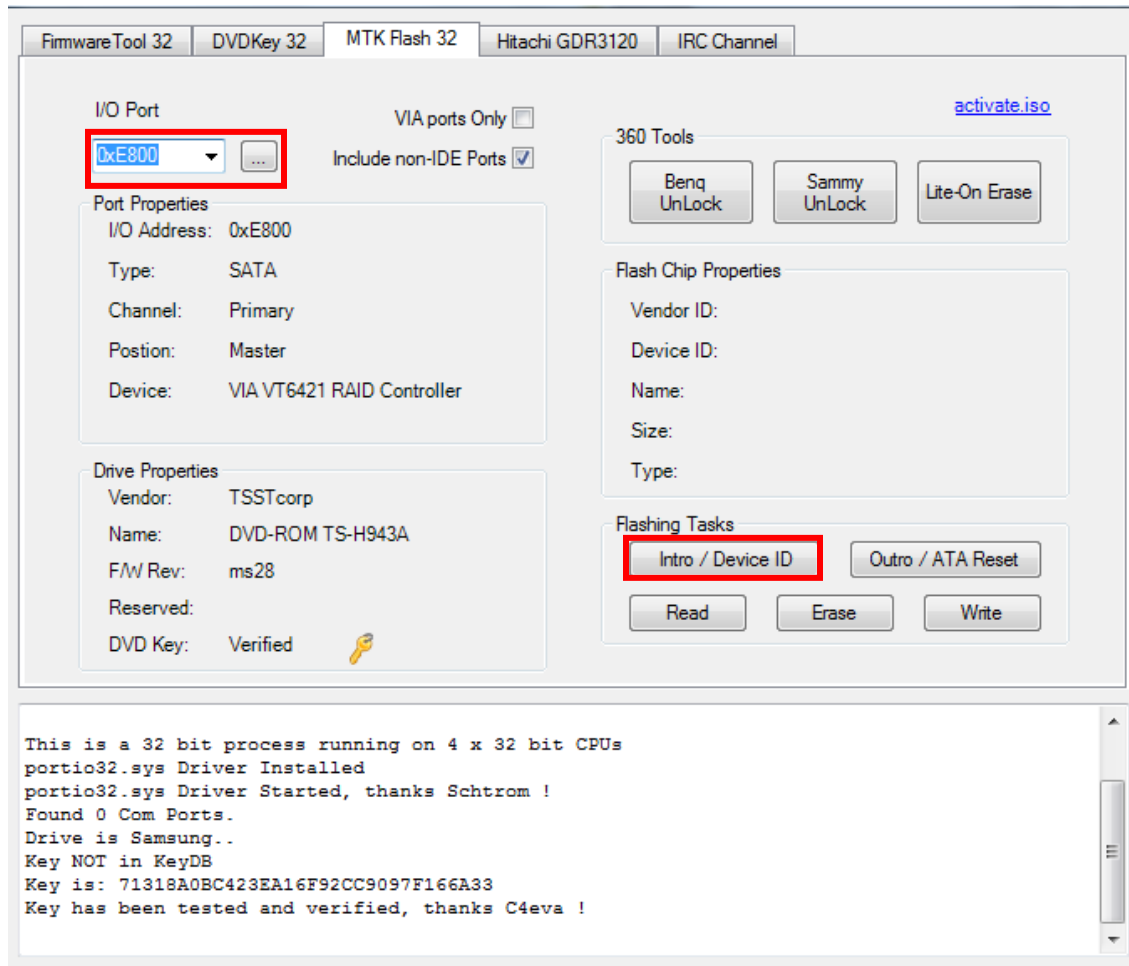

JungleFlasher will prompt you with instructions.

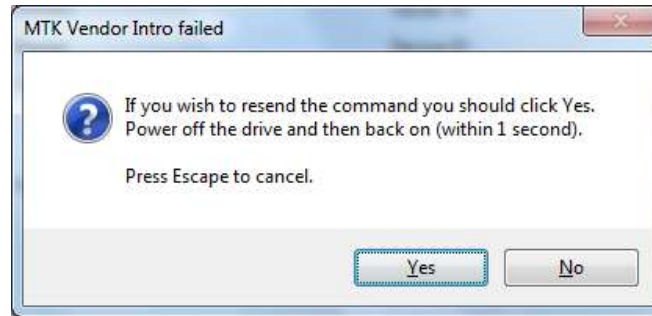


Click **Yes** the **Running Log** will display something similar to this.

```
Sending Vendor Intro to port 0xCF00  
Invalid Status  
Re-sending Vendor Intro:  
.....
```

When ..... Are appearing, do as previously instructed by JungleFlasher. Power off the drive then, **within 1 second**, power it back on.

The drive should be in Vendor Mode (0x70) now and return good flash chip properties, you can check in the **Running Log** or **Flash Chip Properties**, The drive should also show as “**Drive In Vendor Mode!**” in the **Drive Properties**.

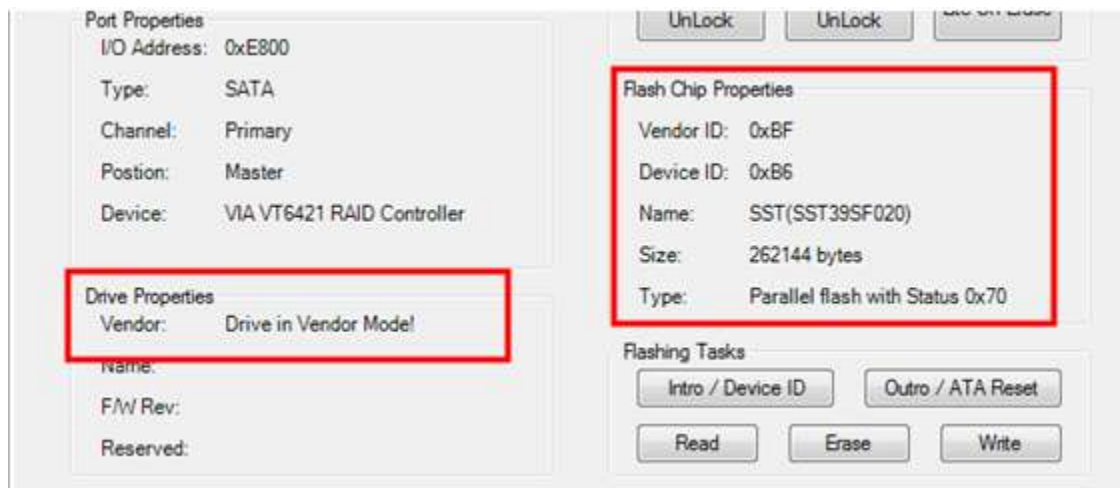

**[Now CLICK HERE to proceed](#)**

**If it didn't work – read on**




## Alternate method if you are struggling with the above


Load JungleFlasher, and select **MTKFlash 32** tab.



Select correct **I/O Port** (check for **TS-H943** in Drive Properties) and click **Intro / Device ID**.

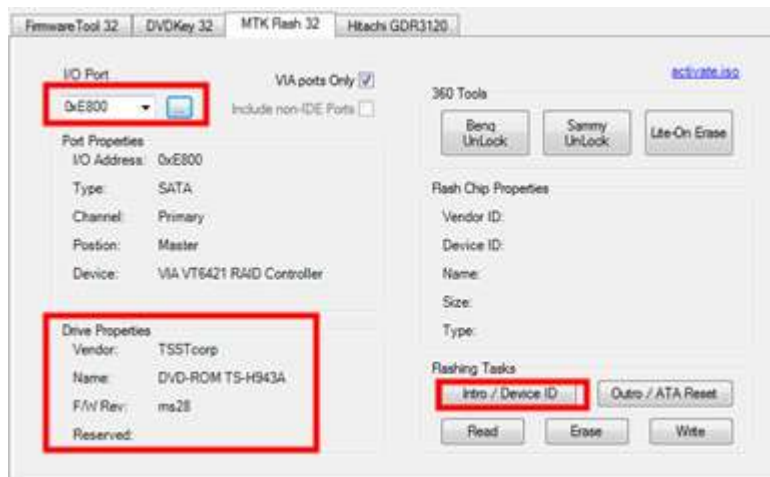

JungleFlasher will prompt you with instructions.

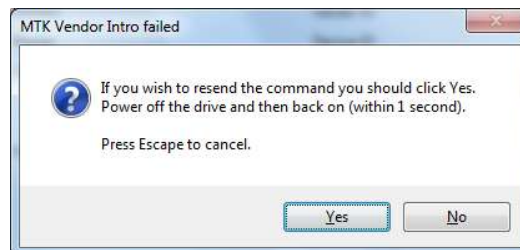

**Now power off the drive!**

Then click **YES**,

Click **Yes** the **Running Log** will display something similar to this.

```
Sending Vendor Intro to port 0xCF00
Invalid Status
Re-sending Vendor Intro:
.....
```

When ..... Are appearing,

power **ON** the drive!


The drive should be in Vendor Mode (0x70) now and return good flash chip properties, you can check in the **Running Log** or **Flash Chip Properties**, The drive should also show as “**Drive In Vendor Mode!**” in the **Drive Properties**.



[Now CLICK HERE to proceed](#)

## Reading the Firmware from the drive.

Now, we would like to read the firmware from the drive first, so select **read**.

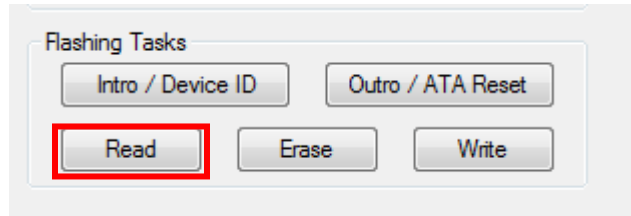


Again, watch the **Running Log** for constant status updates.

Firmware reading:

```
Getting Status from port 0xE800
Parallel flash found with Status 0x70

Reading Bank 0: .....
Reading Bank 1: .....
Reading Bank 2: .....
Reading Bank 3: .....
```

Once the firmware has been successfully read, JungleFlasher will prompt you to save it.

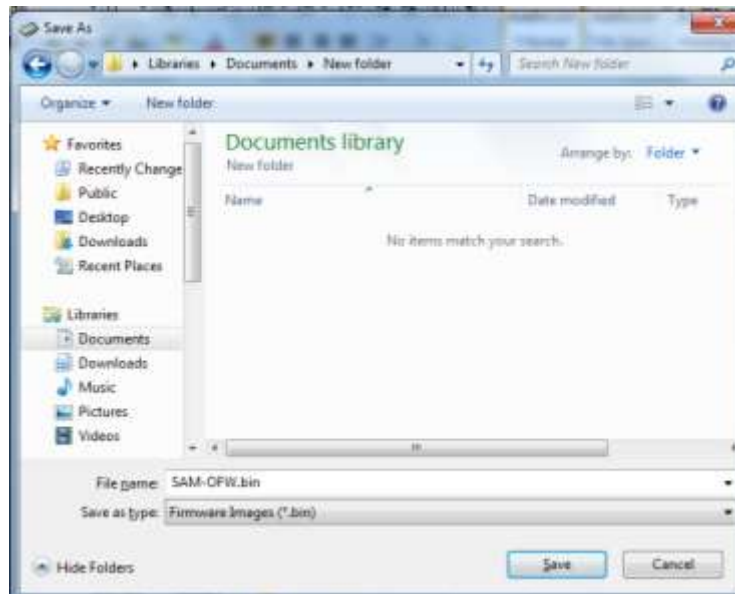


Once saved, JungleFlasher will then prompt you asking if you would like to auto-load iXtreme for Samsung Drives. You must have installed the **JungleFlasher Firmware Pack** into the same directory as JungleFlasher.exe if you wish to benefit from this feature.



Click **Yes** to auto load iXtreme (from the firmware pack) for Samsung into the **Target Buffer**, JungleFlasher will also load your previously dumped **Sam-OFW.bin** as **Source Firmware**. Then, copy data from **Source to Target automatically**.

Just verify **Source data** reports as it should, OSIG of **TSSTcorpDVD-Rom TS-H943** with a key with no multiple **FF / 00 / 77** bytes

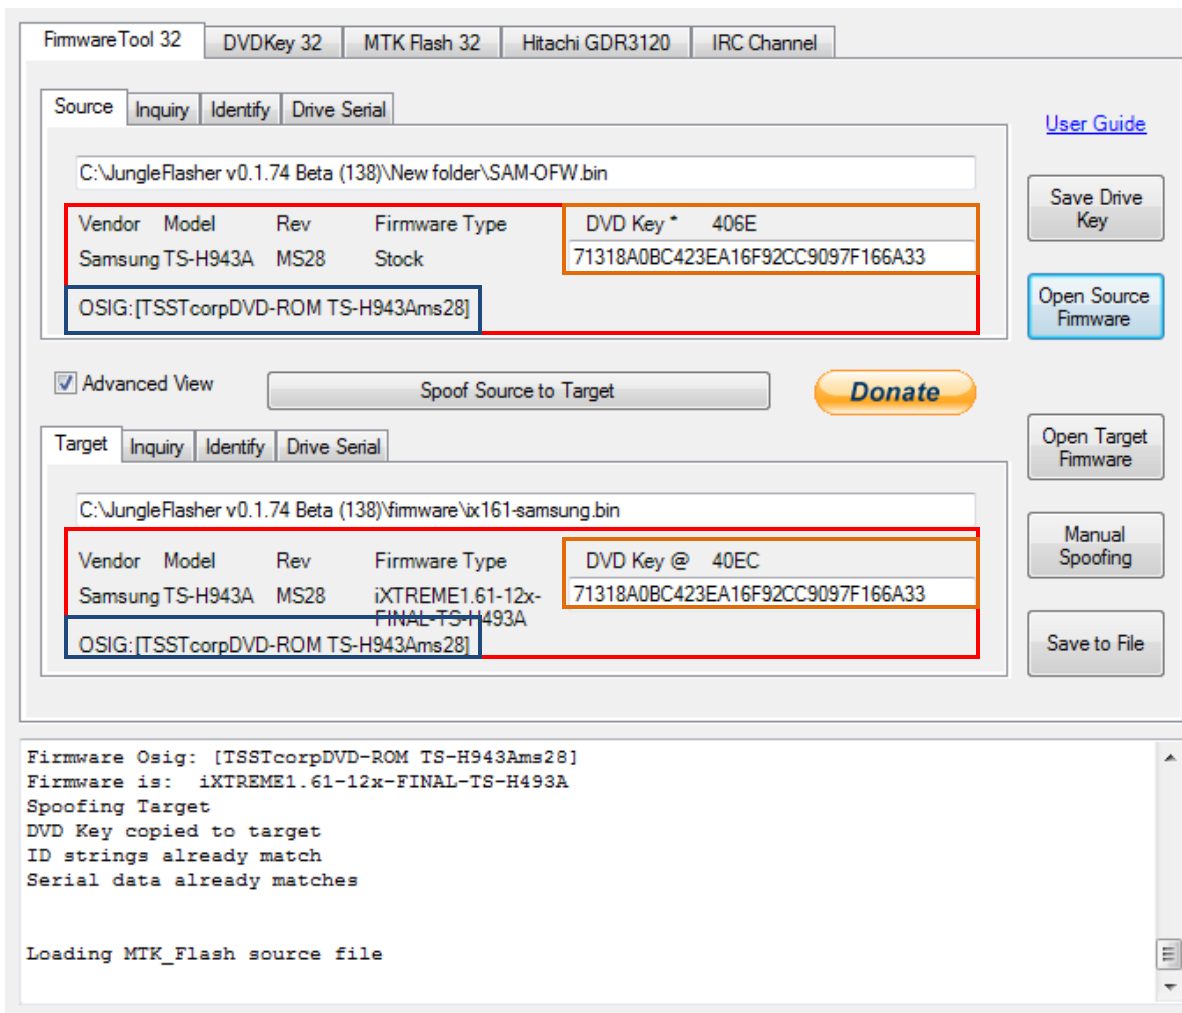

To save a firmware file based on what's currently in **Target Buffer** click, **Save to File**.

Vendor	Model	Rev	Firmware Type	DVD Key @ 40EC
Samsung	TS-H943A	MS28	iXTREME1.61-12x-FINAL-TS-H493A	71318A0BC423EA16F92CC9097F166A33

OSIG:[TSSTcorpDVD-ROM TS-H943Ams28]


JungleFlasher will ask you where to save the hacked firmware and what you want to name it, and then you can proceed to write the firmware to the drive.

## Writing Firmware to the drive


To write the firmware, as long as drive is still unlocked (Vendor Mode) we just click **MTKFlash 32** tab.



Verify you have good flash chip properties still.

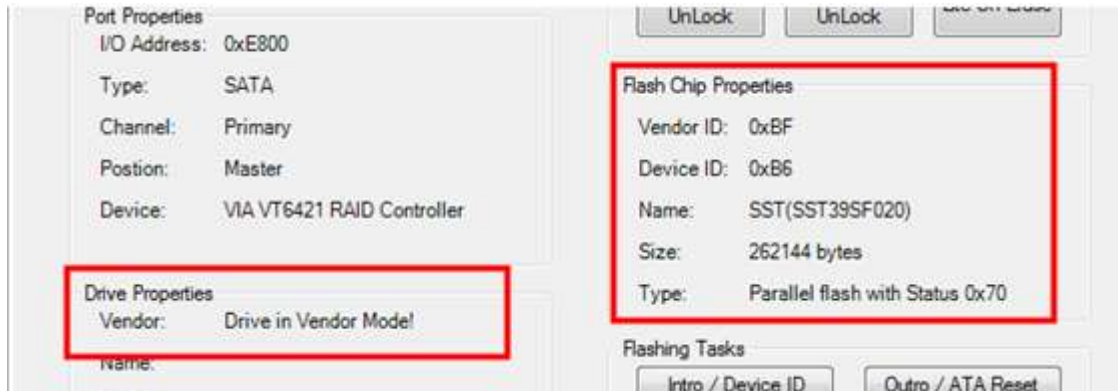

Then, click **Write**.

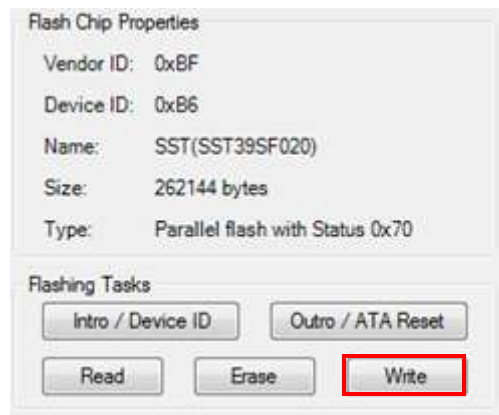

**Write** Command, will erase and flash all 4 banks in turn, then read back the flash and verify.

A series of 16 .....s is JungleFlasher writing the 16 sectors of each bank (4 banks, 0/1/2/3)

After writing all 64 sectors, signaled by 64 dots (16 dots across 4 banks) JungleFlasher will verify what it wrote by reading back and comparing against the **Target Buffer**. So, what we really want to see is **Write Verified OK!**

```
Flash Verification Test !  
Reading Bank 0: .....  
Reading Bank 1: .....  
Reading Bank 2: .....  
Reading Bank 3: .....  
Write verified OK !
```

Ok, now you have flashed your Samsung Drive successfully,

Power off – connect back to console and test!

Should you not get **Write Verified OK!** Please ask for support in the JungleFlasher support channel, found at [irc.efnet.net](http://irc.efnet.net) - channel **#JungleFlasher**, or click [HERE](#)

**[RETURN TO START OF TUTORIAL](#)**

## **BenQ VAD6038 (62430c and 64930c)**

### **Overview**


The BenQ Drive revision is tackled in a very similar way to the Samsung Drives.

The steps to modifying / restoring a BenQ Drive follow the basic outline of:

- Unlocking the Drive
- Reading the Original firmware
- Patching Key into hacked Firmware
- Erasing Drive
- Writing Drive

The tutorial will state multiple unlock methods, once drive is **Unlocked / In Vendor Mode (0x73)** you should proceed to the next step of **reading the firmware** from the drive.

**The following Flowchart Enables you to use the correct method for your drive!**

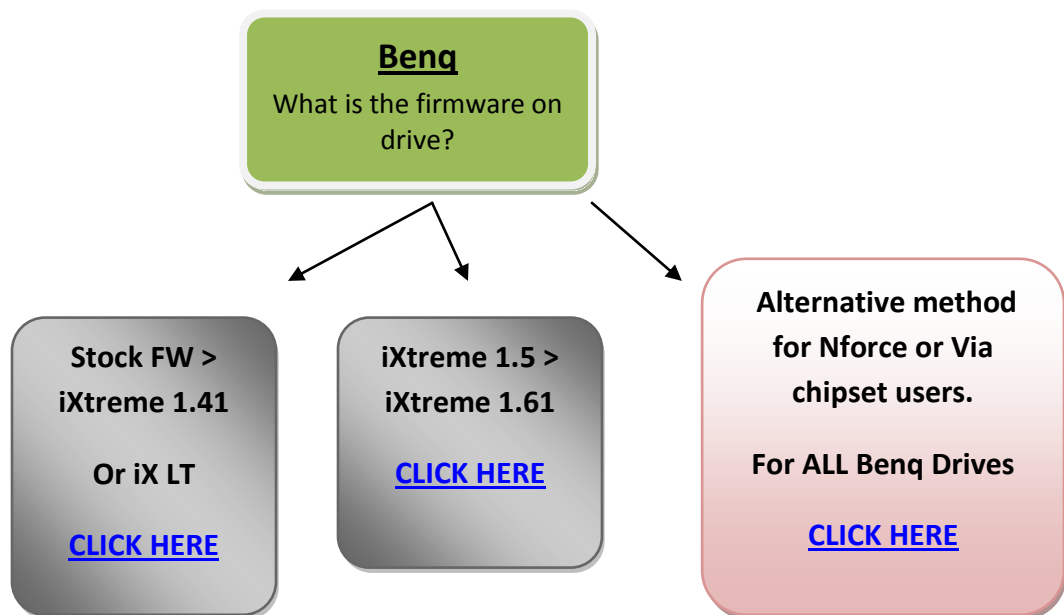



## Unlocking the drive.

Before we can do anything to the drive, it must be in Vendor Mode (status 0x73), the majority of the unlock methods are found under **MTKFlash32** tab,

### Half Open Tray Unlock for iXtreme 1.5 > iXtreme 1.61.

If using a 360 to power the drive this method can be tricky to accomplish as the 360 likes to close the DVD Drive after powering it on.

You need to power on the drive with the **Tray Half Open** – To do this using an Xbox 360 as Power source, eject the DVD drive and then **remove the power lead from the Drive.**

**Close the tray half way and plug the DVD Drive power cable back into the drive, being VERY cautious to ensure the plug is the right way around.**

### Using a Connectivity Kit / Xtractor to power the drive.

The easiest way to do this is to simply use the eject button on your connectivity kit to eject the drive tray, power off the connectivity kit, push the tray half in and power back on the connectivity kit.

Ok, now we half the half open tray, we navigate to **MTKFlash32** tab if you haven't already.




Select correct **I/O Port** then

Click **Intro / DeviceID**.



If tray status is correct, drive should return good **Flash Chip Properties** showing status **0x73**, **Drive Properties** should show **"Drive In Vendor Mode!"**.

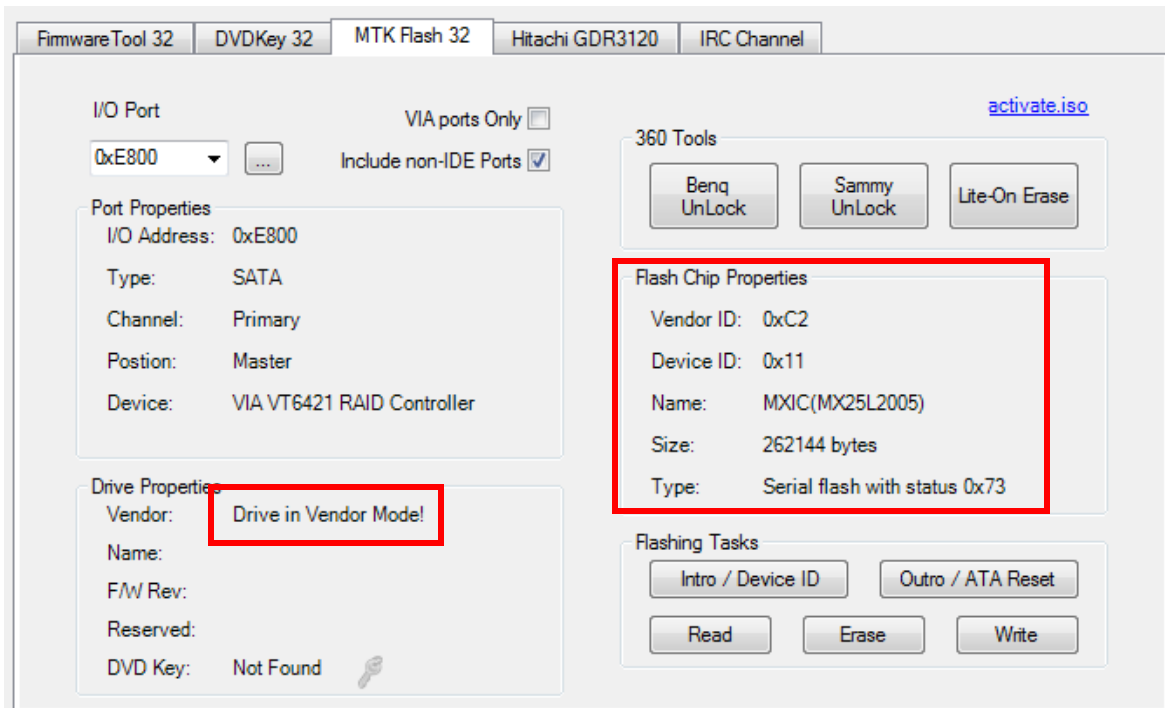

***NOTE: Please ignore the "DVD Key: Not Found" message in drive properties! (Benq cannot automatically verify key.)***

Once drive is in **Vendor Mode**, you can proceed with **Reading the Drives Firmware**.

**[CLICK HERE TO PROCEED](#)**

## **BenQ UnLock Stock/ iXtreme 1.1 -> 1.41 / Xtreme/iXtreme LT Firmware's Only.**

Please note, BenQ-Un-Lock **WILL NOT** work on drives that have iXtreme 1.5>1.61 firmware on them (please use VCC Trick or Half Open Tray)


Connect your BenQ drive up via SATA to your PC, power on, and run JungleFlasher.

After a few seconds you will be taken to the main application.

Click the **MTKFlash32** tab.




Then, select correct **I/O Port** by verifying **PBDS VAD6038** or **SATA DVD-ROM** shows in the **Drive Properties** and click **BenQ UnLock**.

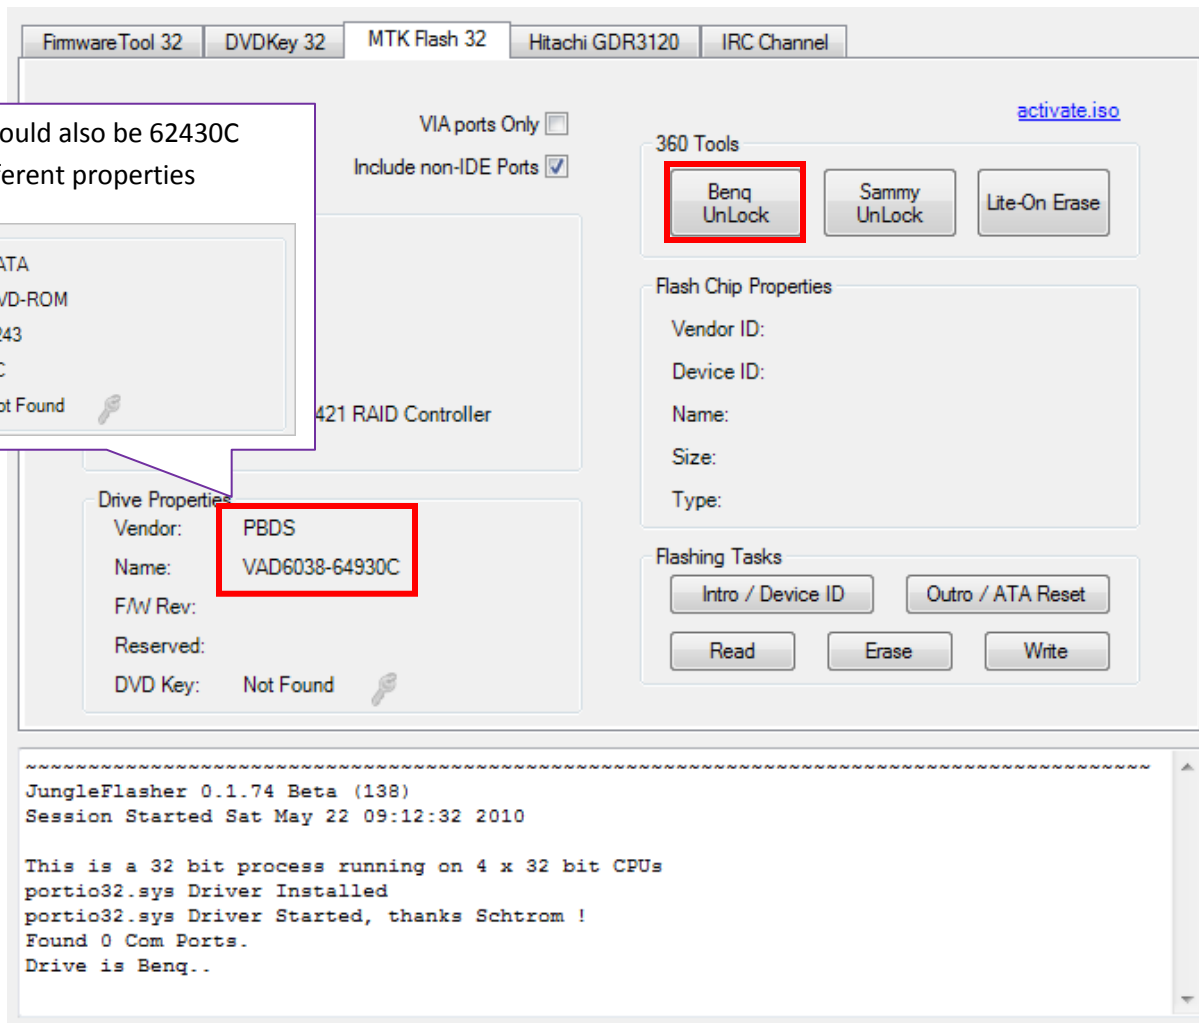

JungleFlasher will send the Magic Keys to unlock the drive and should return this message in the **Running Log**. JungleFlasher has also sent the Intro command to the drive.

```
Sending Magic Keys to Drive on port 0x0xCF00
.....
Done!
Sending Vendor Intro
Requesting Device ID
Manufacturer ID: 0xC2
Device ID: 0x11
Flash Name: MXIC(MX25L2005)
Flash Size: 262144 bytes
```

The drive should be in **Vendor Mode (0x73)** now and return good flash chip properties, you can check in the **Running Log**, **Drive Properties** or **Flash Chip Properties**.

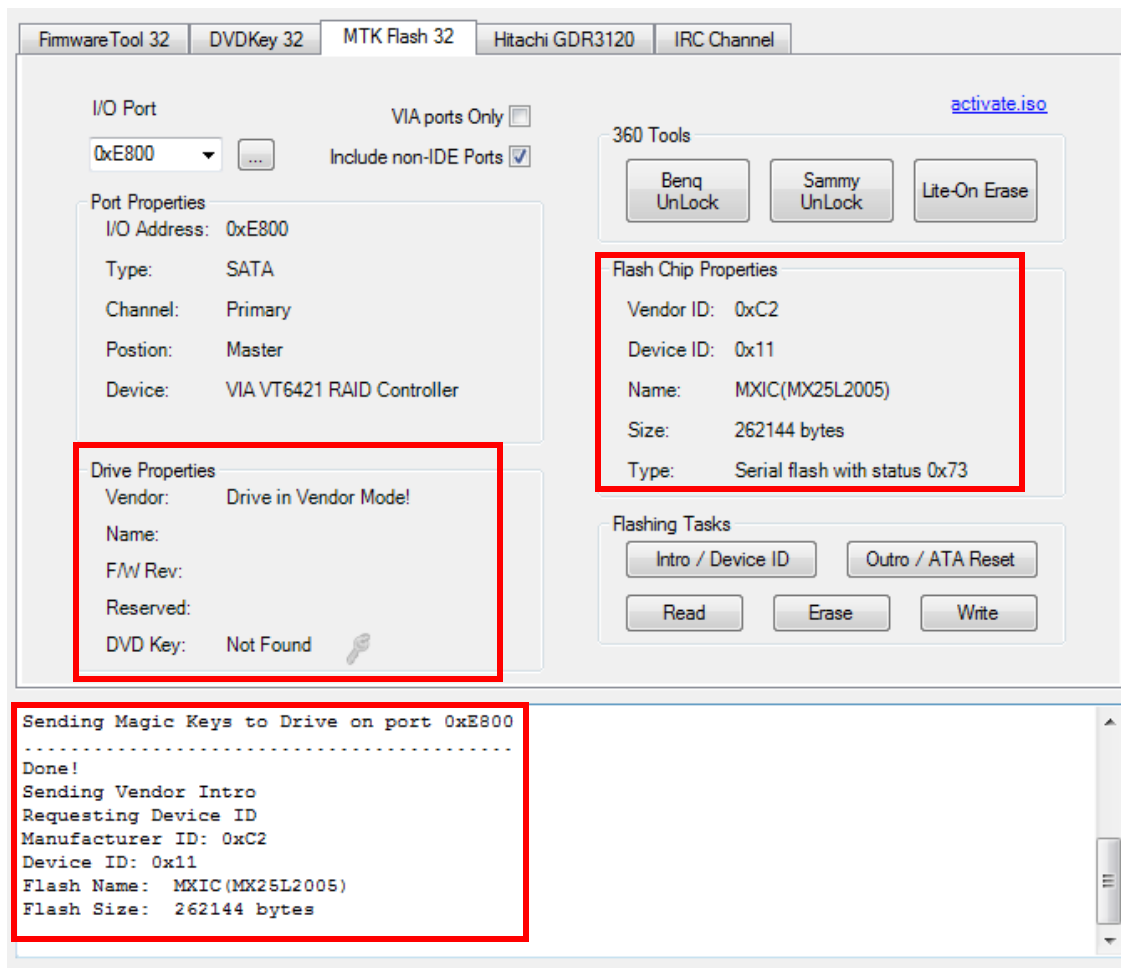

Once the drive is in **Vendor Mode**, you can proceed with **Reading the Drives Firmware**.

[CLICK HERE TO PROCEED](#)


## DeviceID Unlock / Vcc Trick (VIA/Nforce only) Stock + Modified Drives

This method has only really been tested on VIA (no drivers, or 530c drivers) and Nforce Chipsets, although there is no harm in trying on others, this method works on Hacked and Stock Drives.


Load JungleFlasher, and select **MTKFlash32** tab.



Then, select correct **I/O Port** by verifying **PBDS VAD6038** or **SATA DVD-ROM** shows in the **Drive Properties** and click **Intro / Device ID**.

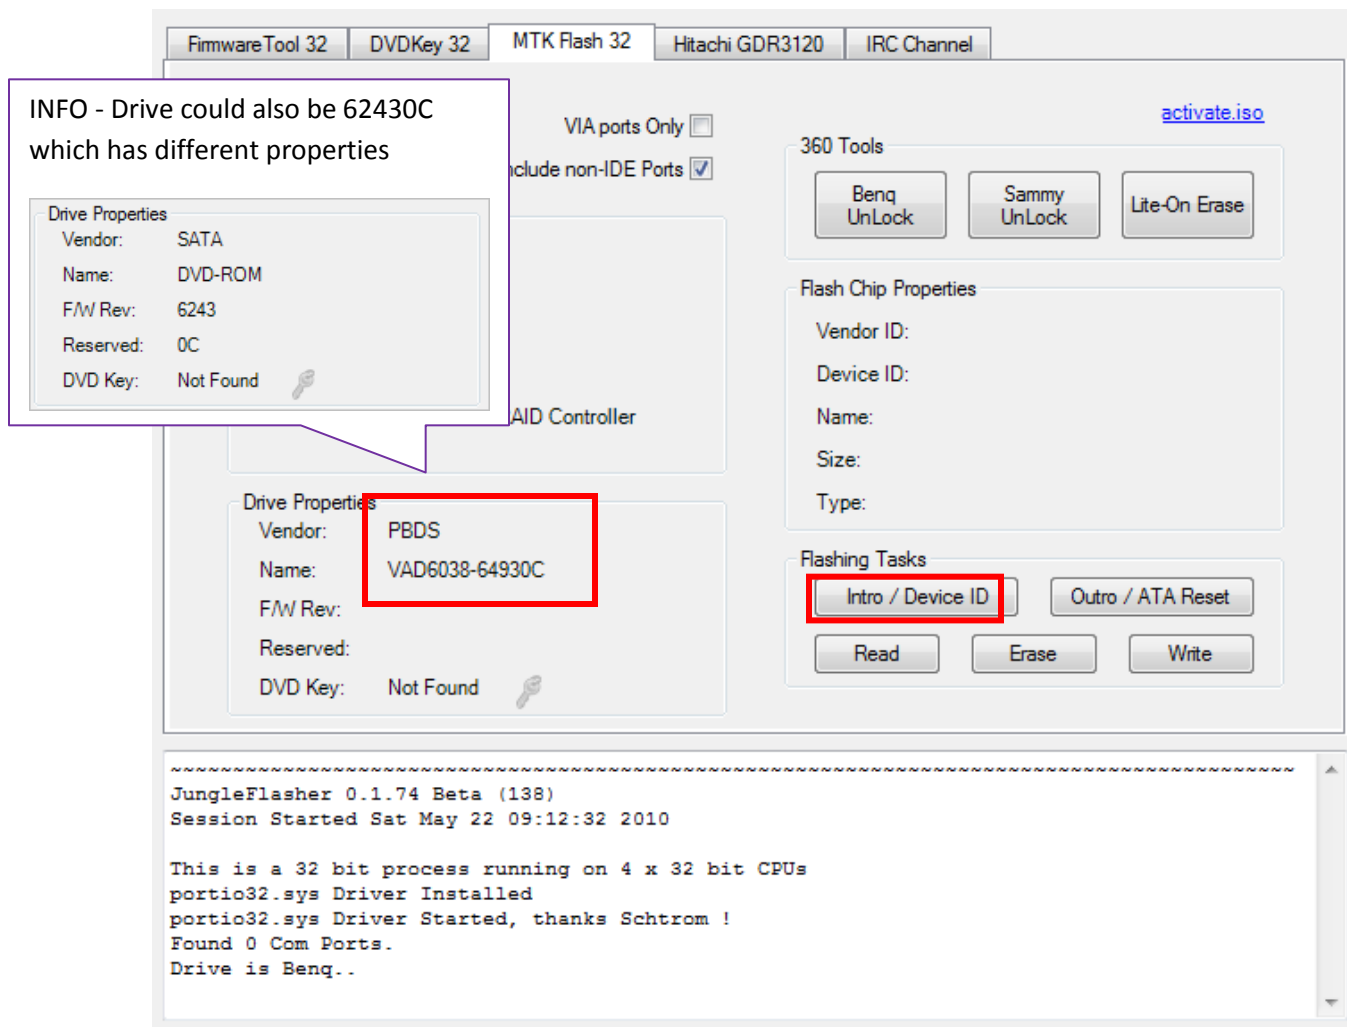

JungleFlasher will prompt you with instructions.

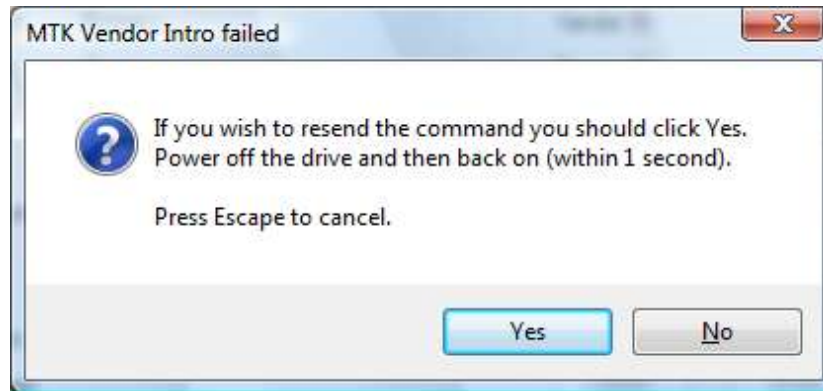


Click **Yes** the **Running Log** will display something similar to this.

```
Sending Vendor Intro to port 0xCF00  
Invalid Status  
Re-sending Vendor Intro:  
.....
```

When ..... are appearing, do as previously instructed by JungleFlasher. Power off the drive, then, **within 1 second**, power it back on.

The drive should be in Vendor Mode (0x73) now and return good flash chip properties, you can check in the **Running Log** or **Flash Chip Properties**, Drive properties should display “**Drive in Vendor Mode!**”.

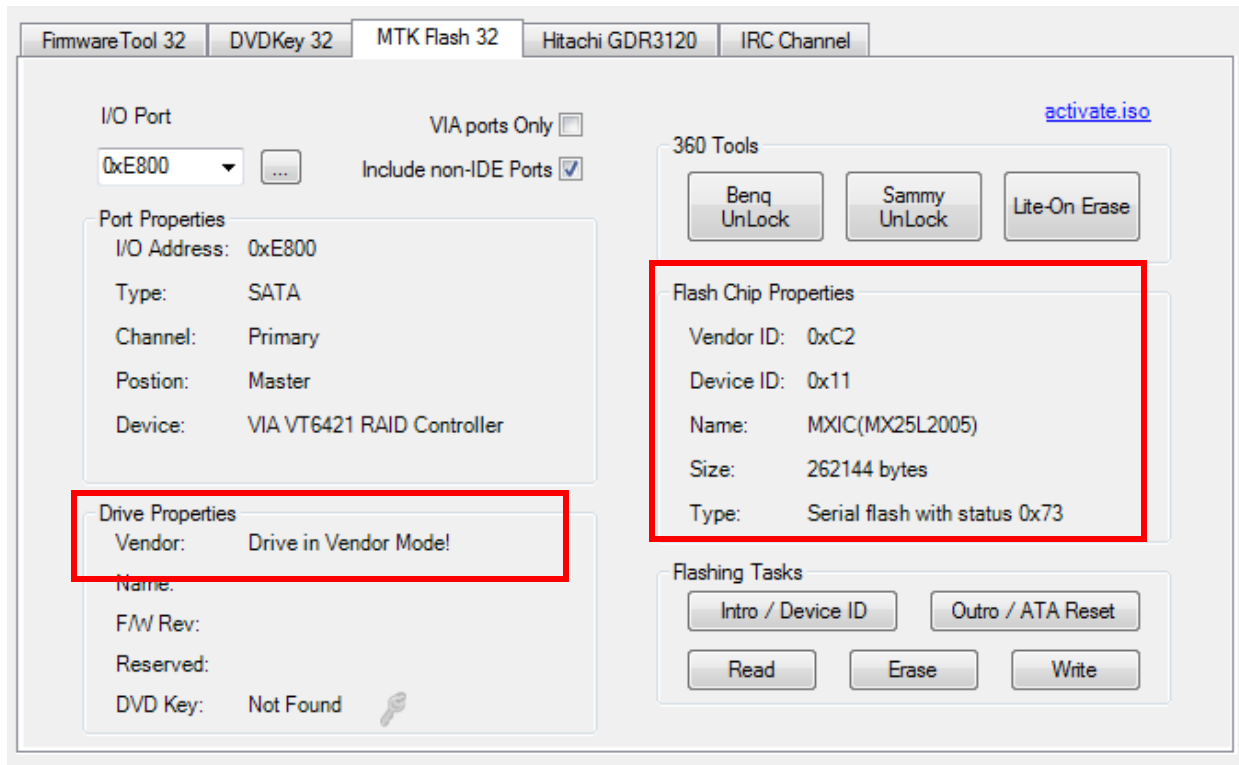


[CLICK HERE TO PROCEED](#)


**If it didn't work – read on**

**Alternate method if you are struggling with the above!**


Load JungleFlasher, and select **MTKFlash32** tab.

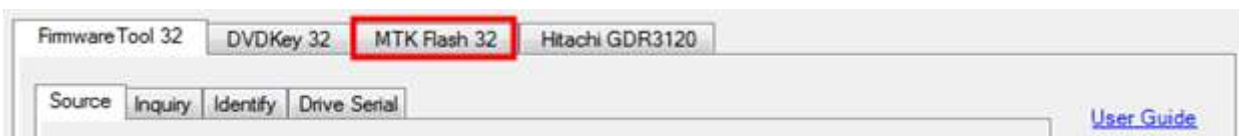

Then, select correct **I/O Port** by verifying **PBDS VAD6038** or **SATA DVD-ROM** shows in the **Drive Properties** and click **Intro / Device ID**.

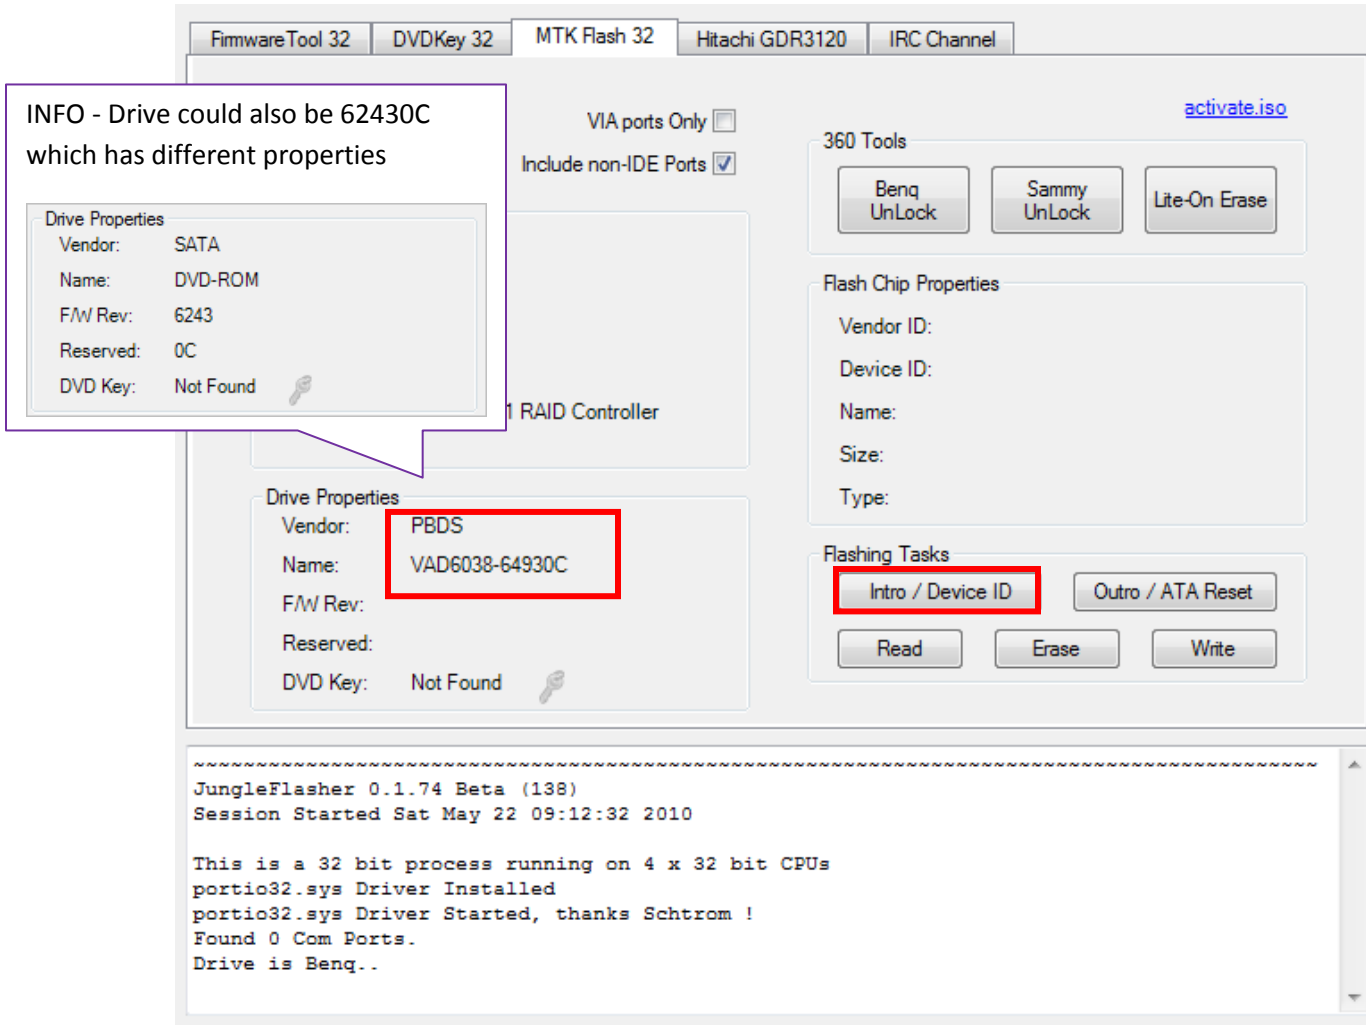

JungleFlasher will prompt you with instructions.

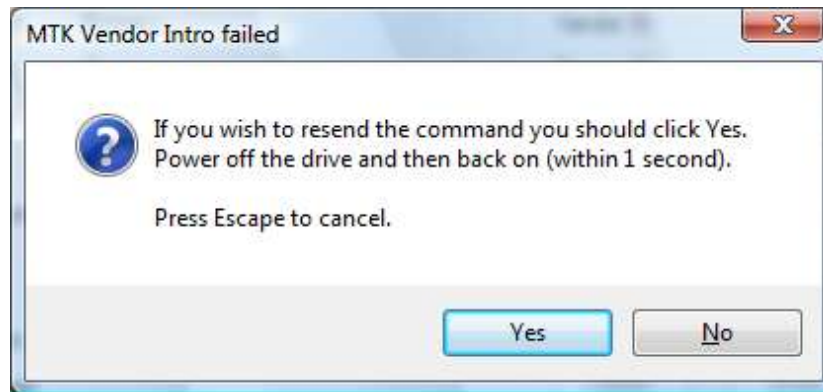

Now turn **OFF** the power to the drive!

Click **Yes**, the **Running Log** will display something similar to this.




```
Sending Vendor Intro to port 0xCF00
Invalid Status
Re-sending Vendor Intro:
.....
```

While ..... are appearing,

turn **ON** the power to the drive


The drive should be in Vendor Mode (0x73) now and return good flash chip properties, you can check in the **Running Log** or **Flash Chip Properties**, Drive properties should display “**Drive in Vendor Mode!**”.

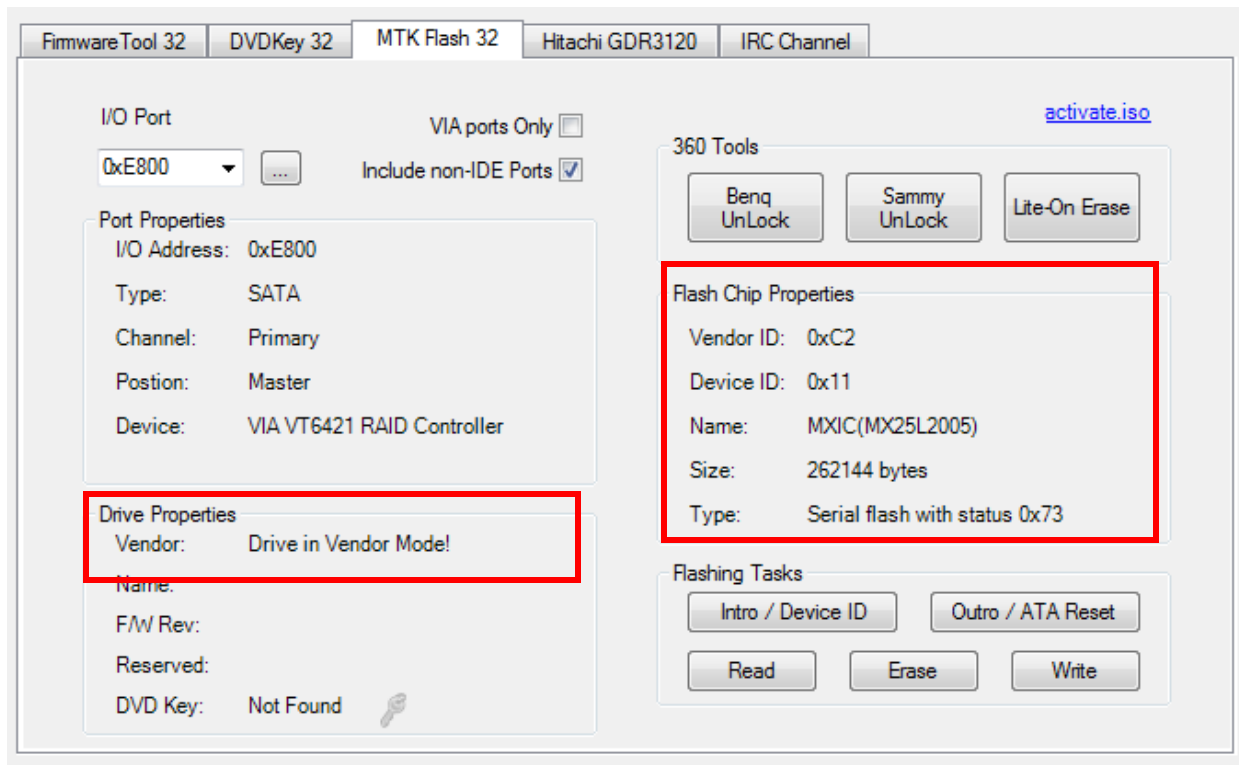

[CLICK HERE TO PROCEED](#)

## Reading the Firmware from the drive.


Now, we would like to read the firmware from the drive first, so select **read**.

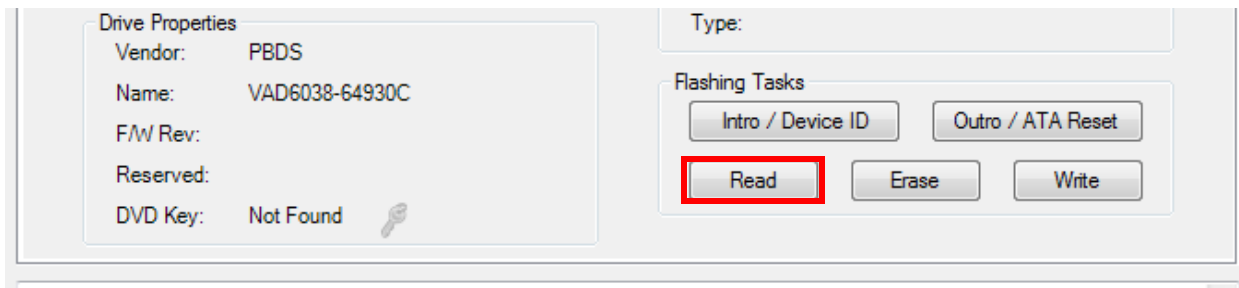


Check the **Running Log** and you will see it reading the firmware from the drive.



Once the firmware has been read JungleFlasher will prompt you to save the firmware. Name it what you wish and select directory path of your choice and click **Save**.

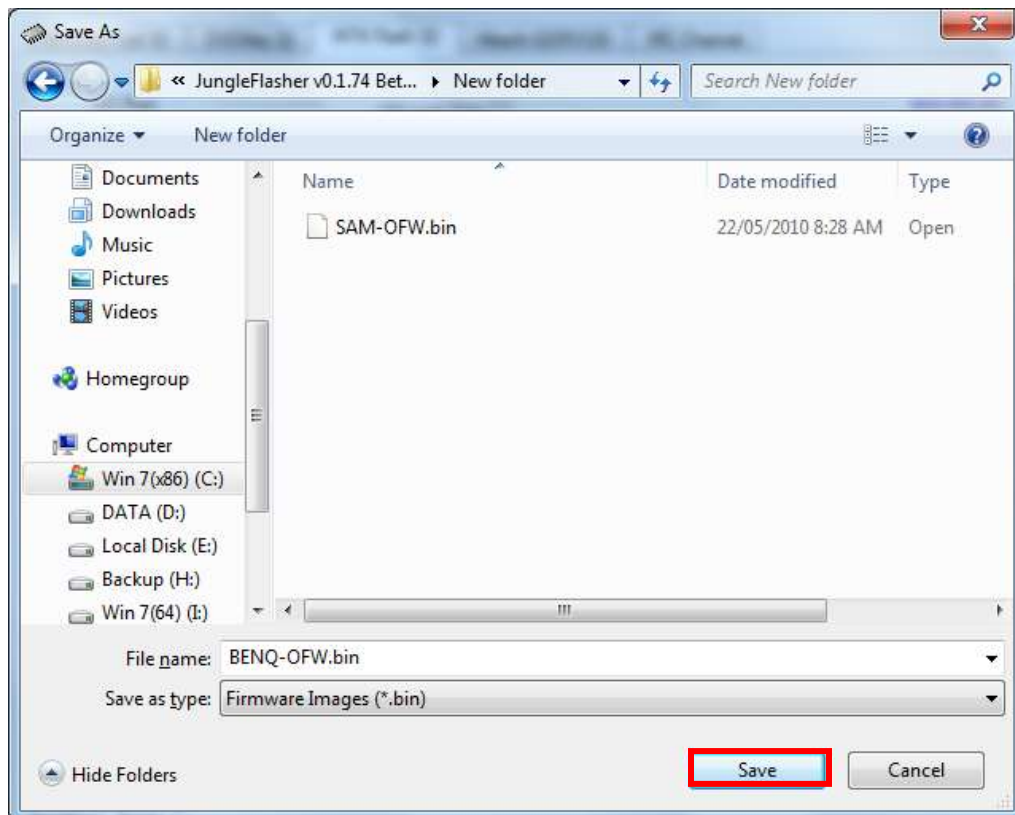


Once saved, JungleFlasher will then prompt you asking if you would like to auto-load iXtreme for BenQ Drives. You must have installed the **JungleFlasher Firmware Pack** into the same directory as JungleFlasher.exe if you wish to benefit from this feature.

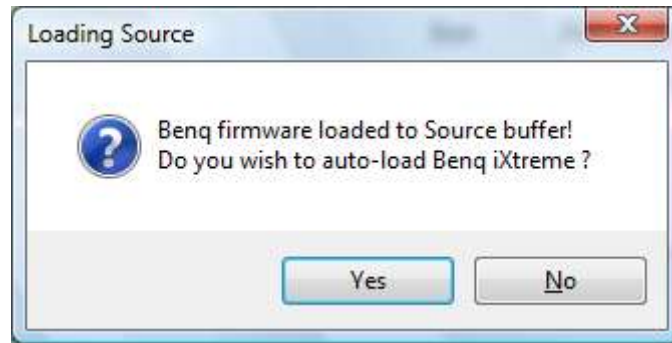

Click **Yes** to auto load iXtreme (from the firmware pack) for BenQ into the **Target Buffer**, JungleFlasher will also load your previously dumped **BenQ-OFW.bin** as **Source Firmware**. Then, copy data from **Source** to **Target** automatically.

Just verify **Source data** reports as it should, OSIG of **VAD 6038** or **SATA DVDROM** with a key with no multiple **FF/00/77** bytes.

Now, verify **unique Source Data** matches that in **Target Buffer** and click save to file if you wish to backup your Hacked firmware.

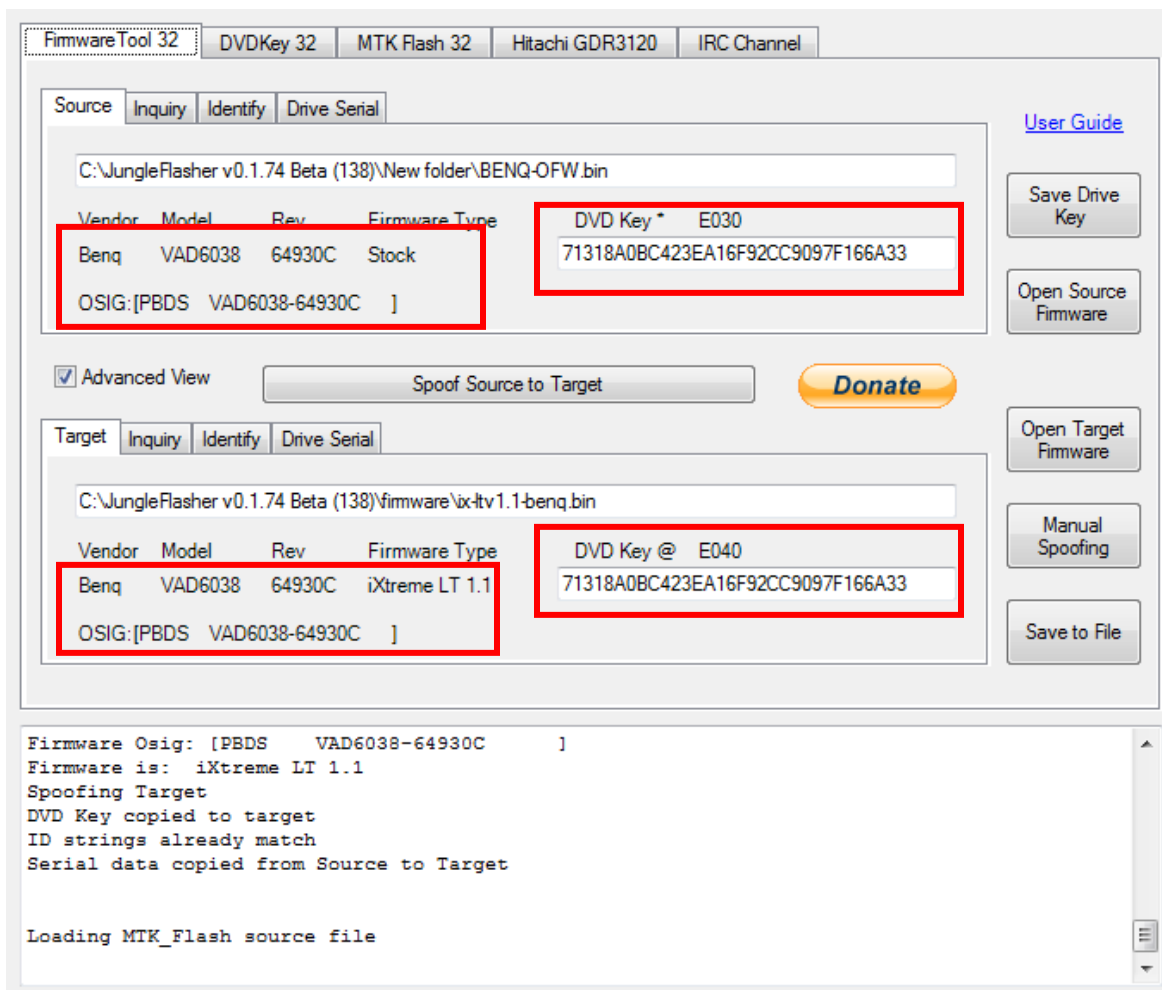

You can now save the **Target Buffer** to file by clicking **Save to File**.

Advanced View Spoof Source to Target Donate

Target Inquiry Identify Drive Serial

C:\JungleFlasher v0.1.74 Beta (138)\firmware\ix-ltv1.1-benq.bin

Vendor	Model	Rev	Firmware Type	DVD Key @ E040
Benq	VAD6038	64930C	iXtreme LT 1.1	71318A0BC423EA16F92CC9097F166A33

OSIG:[PBDS VAD6038-64930C ]

Open Target Firmware

Manual Spoofing


Save to File

## Writing Firmware to the drive.


To write the firmware, as long as drive is still unlocked (Vendor Mode) we just **click MTKFlash 32** tab.



Verify you have good flash chip properties still.

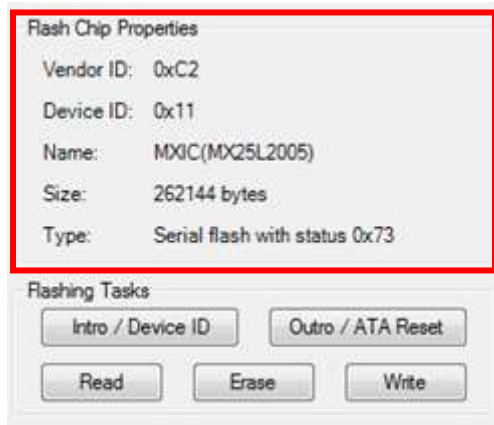

Then, click **Write**.

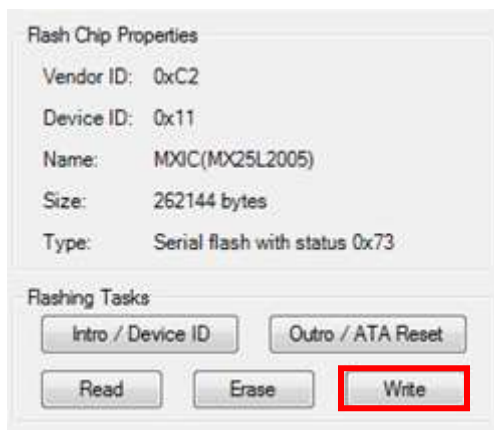

**Write** Command, will send Chip Erase prior to writing and then proceed to write the 4 banks of the firmware (banks 0/1/2/3).

A series of 16 .....’s is JungleFlasher writing the 16 sectors of each bank (4 banks, 0/1/2/3).

```

Sending Chip Erase to Port 0xE800
Writing target buffer to flash
Writing Bank 0: .....
Writing Bank 1: .....
Writing Bank 2: .....
Writing Bank 3: .....

```

After writing all 64 sectors, signaled by 64 dots (16 dots across 4 banks) JungleFlasher will verify what it wrote by reading back and comparing against the Target Buffer, what we really want to see is **Write Verified OK!**

```

Flash Verification Test !
Reading Bank 0: .....
Reading Bank 1: .....
Reading Bank 2: .....
Reading Bank 3: .....
Write verified OK !


```

Now send an Outro to the drive.



This will release a drive from **Vendor Mode** and send **ATA Reset** to the Drive. It then sends an inquiry command to the drive.

This will save you power cycling the drive and then changing port away and change it back again, with the click of a button, drive will 'reset' itself and JungleFlasher will send an inquiry command to the drive. If successfully flashed the drive should Inquire correctly and display drive properties.

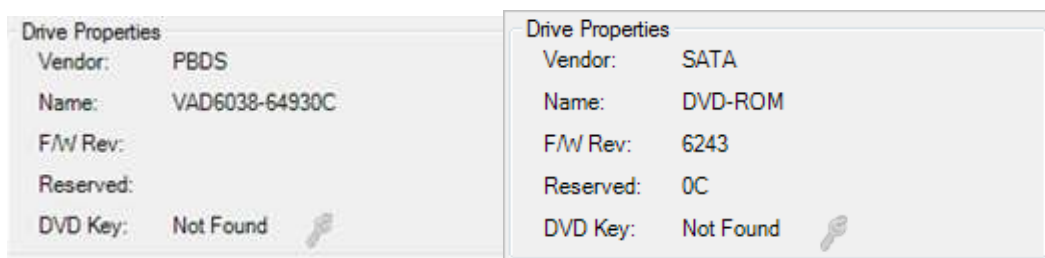

Which drive properties you have depends on BenQ FW version!

Power off – connect back to console and test!

[CLICK HERE TO RETURN TO START OF TUTORIAL](#)


## Hitachi GDR-3120L.

Rom Versions 32/36/40/46/47/58/59/78/79.

### Overview.

Hitachi drives are completely unique in the way and which they are modded. We modify Hitachis on a sector by sector basis. For this to happen the drive must be in Mode-B (mode-b allows windows to recognise the drive!) there are several transfer methods available (some only to certain revisions) But **RAM Upload** can be used for all drives!


JungleFlasher can be used over **Windows API or PortIO.**



**WinAPI** should be used where possible, although **WinAPI requires the drive to be assigned a drive letter**, this **isnt** possible with a **VIA 6421** with **Drivers Removed**.

**PortIO** functionality was added for VIA 6421 Sata users who removed drivers to hack the Lite-On drives without freezing issues.

**To enable PortIO usage, check VIA Ports Only under DVDKey 32 tab.**



**VIA users with no drivers, must utilise the PortIO option**

**you will not be assigned a drive letter in windows with no drivers!!! – You can still dump/flash the drive – it just will NOT SHOW UP IN THE DRIVE LIST!**

**To enable PortIO usage, check VIA Ports Only under DVDKey32 tab**

**(you must have drivers correctly removed!)**

**Not installing VIA drives IS NOT the same as removing them, JF will not enable portIO on status 28**

**39 = drivers couldnt be loaded**

**28 = drivers are not installed**

Regardless of option chosen, the Hitachi Drive must still be in **ModeB**, this is essential to be assigned a drive letter in Windows, for using **WinAPI**, but, also vital for **PortIO** users as most dump and flash commands require it.

**Windows API Users, after setting ModeB, you must wait for hardware changes to be detected (15 secs) If nothing is detected, click “Refresh”**


**Sometimes the drive will not automatically show up – if this is the case (WinAPI users only) open device manager and “scan for changes”**

JungleFlasher uses a unique way of calculating the checksum of the firmware and JungleFlasher will also take over from the user as soon as possible to prevent user error, its not necessary to dump the drive to patch the firmware, JungleFlasher will dump before you try to do anything to the drive.

JungleFlasher also incorporates a “Stability Test” prior to modifying the drive, as safety is paramount.

**[CLICK TO CONTINUE](#)**



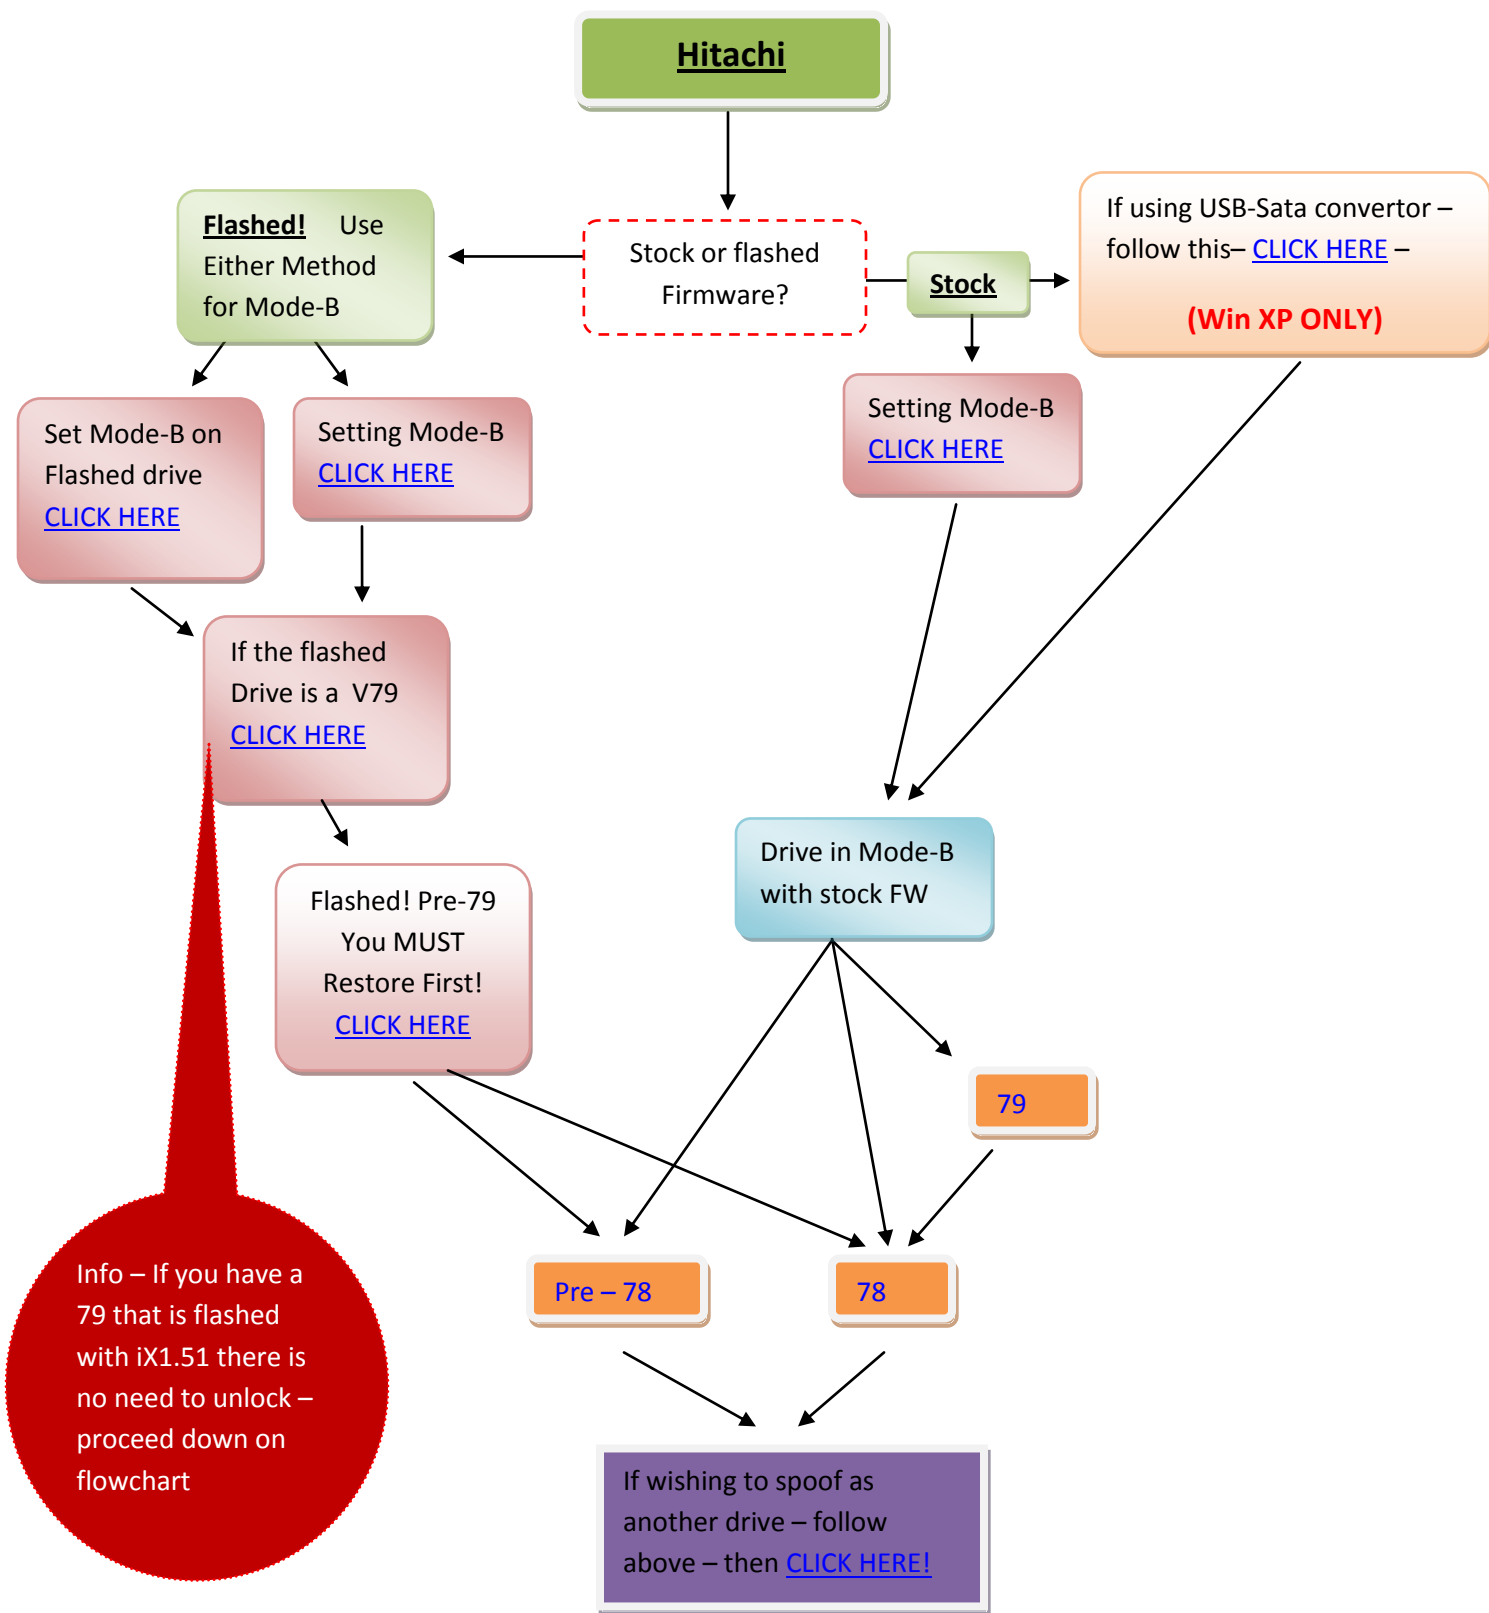


## Setting ModeB

Connect your Hitachi Drive via sata, power it on, then open JungleFlasher and you will be presented with the welcome screen


Then, click the **Hitachi GDR-3120 tab**



You will be presented with the dedicated **Hitachi tab** shown below (or similar to)

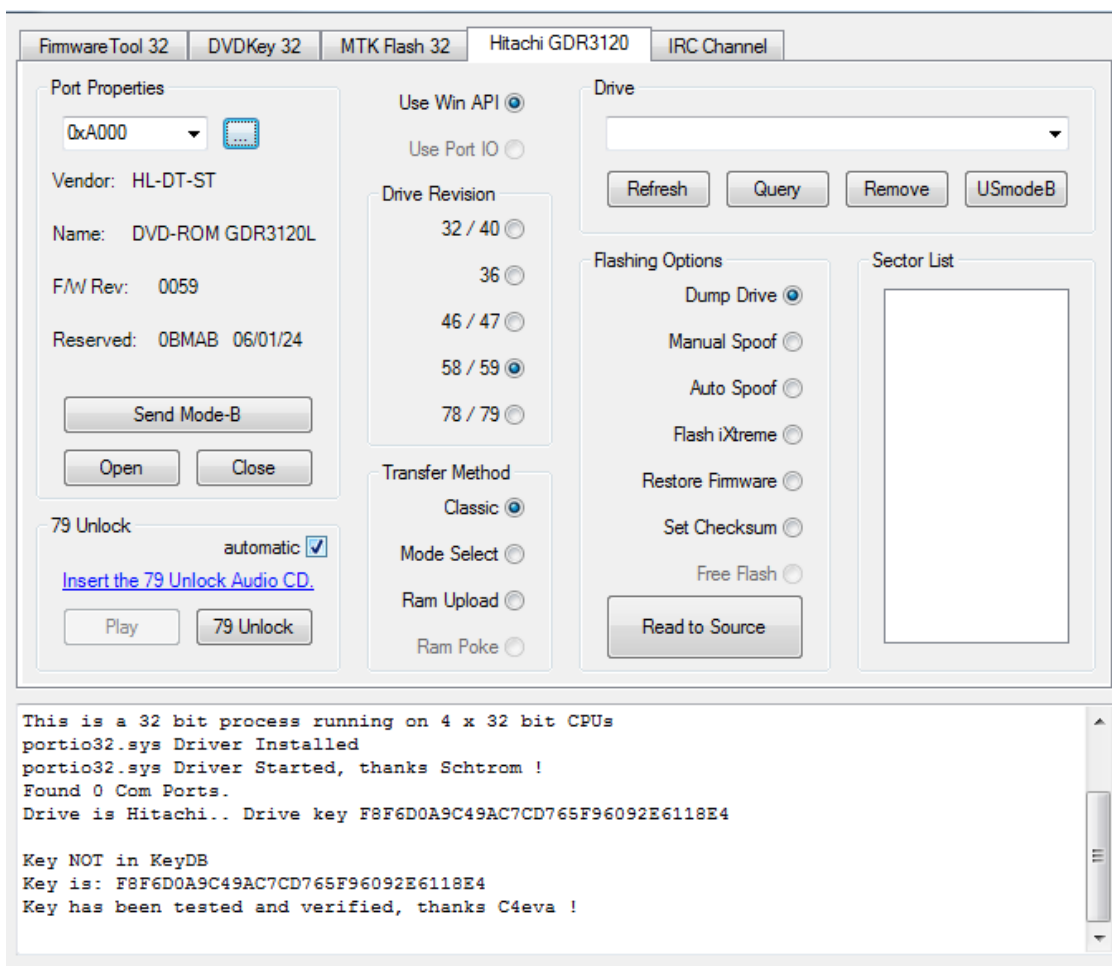


Note the **Hitachi Drive** inquires on my **I/O Port** and that **PortIO** is disabled (using **non-VIA** chipset)

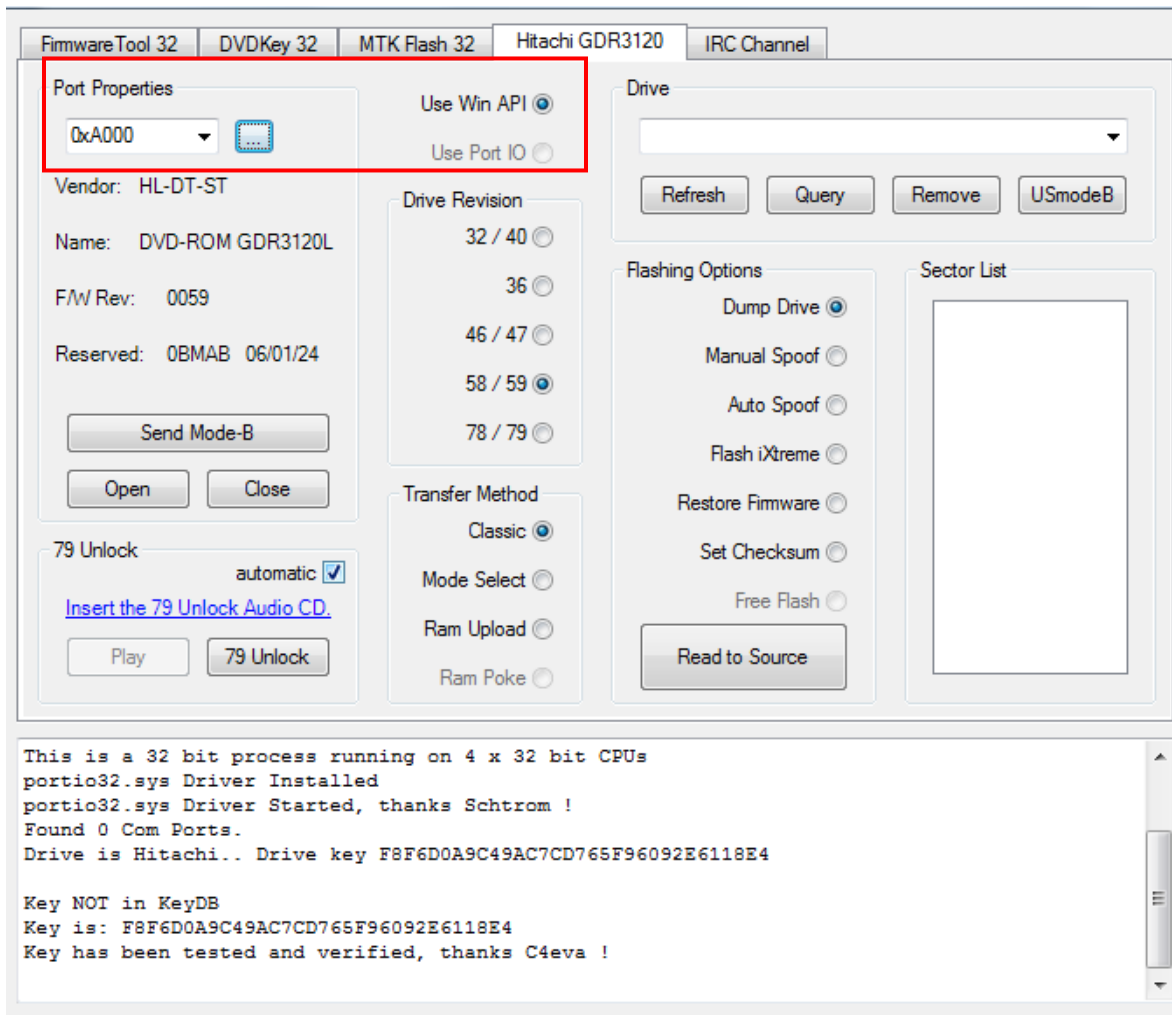

The drive needs to inquire on **I/O** port for **Raw ModeB Commands** to work (this applies to spoofed drives also)

Once it inquires, Click **send ModeB**, you will be presented with the following message, its preferable you do as it states, as the **ModeB built in on some Connectivity Kits, can cause issues.**

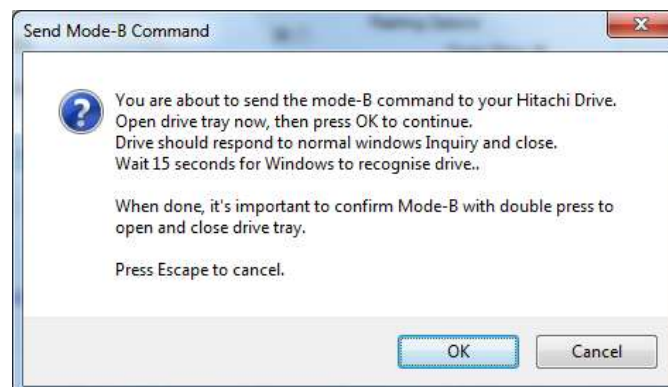

Once done, click **Ok**

The drive should now report as in **ModeB**


```
Drive, answers normal Windows Inquiry 12 0 0 0 24 0
0000: 05 80 00 32 5B 00 00 00 - 48 4C 2D 44 54 2D 53 54 ...2[...HL-DT-ST
0010: 44 56 44 2D 52 4F 4D 20 - 47 44 52 33 31 32 30 4C DVD-ROM GDR3120L
0020: 30 30 35 39                                0059

Mode-B Done!
Scanning for hardware changes
```

```
Found drive C: - Hard Drive.
Found drive D: - Hard Drive.
Found drive E: - Hard Drive.
Found drive F: - CD/DVD. <--- Hitachi found
Found drive G: - CD/DVD.
```

Once **ModeB** is set, if using **WinAPI**, JungleFlasher will scan for hardware changes automatically after 15 seconds (if using vista/win 7 ensure you run jungleflasher as administrator) if drive does not show up then scan for changes in device manager!

**WinAPI users should see similar to this under the 'Drive' section**

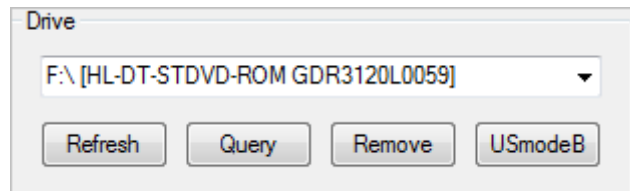

If not, click **Refresh List**

JungleFlasher **WILL NOT** scan for Hardware Changes after setting ModeB for PortIO users. The Drive will **NOT** appear in drive list on right hand side!

Instead, the tasks are carried out, as long as the drive Inquires on the **I / O Port**



**[BACK TO FLOWCHART!](#)**

### **Mode B on an already flashed drive**

Mode B can be easily achieved on a pre-flashed Hitachi

Ensure SATA cable connected to pc!

**This is done by powering on the drive with the tray fully open**

### **To do this using a xbox 360 console for powering the drive;**

1. Eject the drive
2. Pull the power cable from the rear of the DVD-Rom
3. Plug cable back in (ensuring correct orientation of plug)
4. The drive tray will close (if pre-flashed)
5. Check that it takes 2 presses to eject and 2 or 3 to close.

**Your drive is now in Mode B**

### **Using a connectivity kit / power dongle**

1. Eject drive using button on kit
2. Switch power off, then on again
3. The drive tray will close (if pre-flashed)
4. Check that it takes 2 presses to eject and 2 or 3 to close.

**Your drive is now in Mode B**

Start Jungleslasher – click on Hitachi Tab!, ensure correct I/O port

If using WinAPI – drive should show in drive list on right hand side!

If using PortIO option – drive should be visible in port on left hand side  
ONLY!

**[CONTINUE ON FLOWCHART](#)**

## **JungleUSB Drivers and USmodeB (XP ONLY)**

JungleUSB is a hacked USB Storage driver that enables windows to see a Mode A drive over USB, this enables USmodeB command to be sent and the drive.

### **Installing JungleUSB Driver**

(can be downloaded from the usual places).

First you need to connect the drive to your PC with a SATA-USB Bridge Adapter

Windows will automatically install the device as

### **USB Mass Storage Device**

You will need to update driver and install **JungleUSB**

Open Device manager and Find **USB Mass Storage Device** under **Universal Serial Bus Controllers**. Right click on it and **Update Driver**.




Select **No, not this time**. Then click Next




Select **Install from specific location** and click Next



Select **Don't search I will choose the driver to install** and click Next.

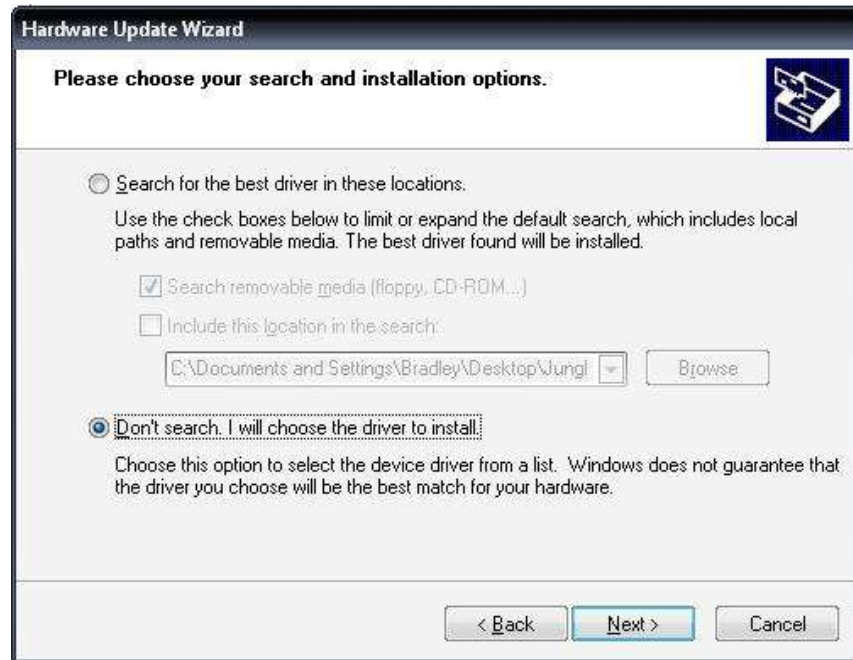


Click **Have Disk**

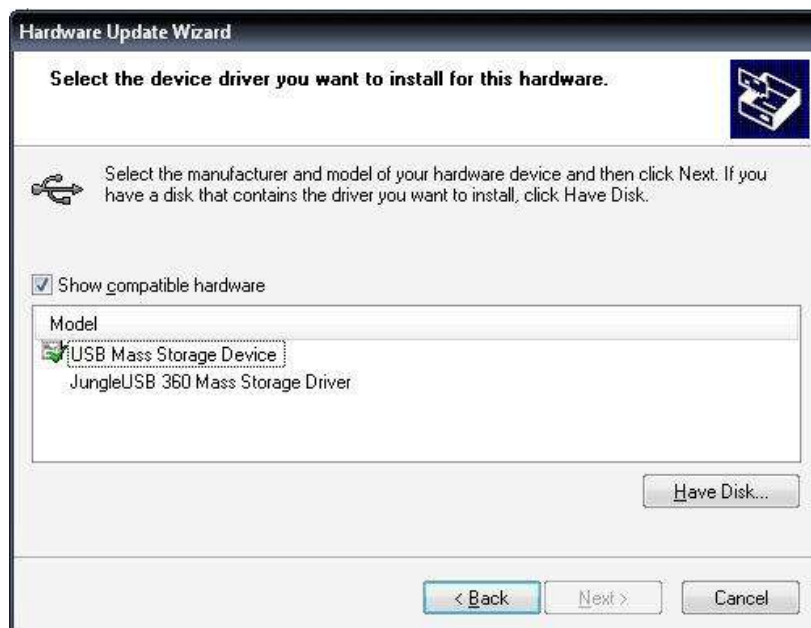

Now click **Browse** and Navigate to **JungleUSB.inf** (can be downloaded from the usual places).

Select it and click Open. Then click OK



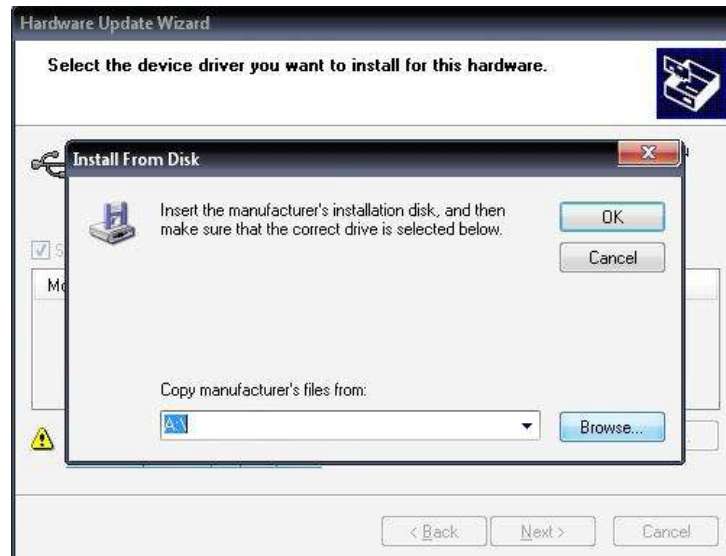


Now click next and the Driver should install.




Click finish and Return to Device manager.




If all went well you should now have **JungleUSB 360 Mass Storage Driver** listed under **Universal Serial Bus Controllers** and **HL-DT-ST DVD-ROM GDR3120 USB Device** listed under **DVD/CD ROM drives**.

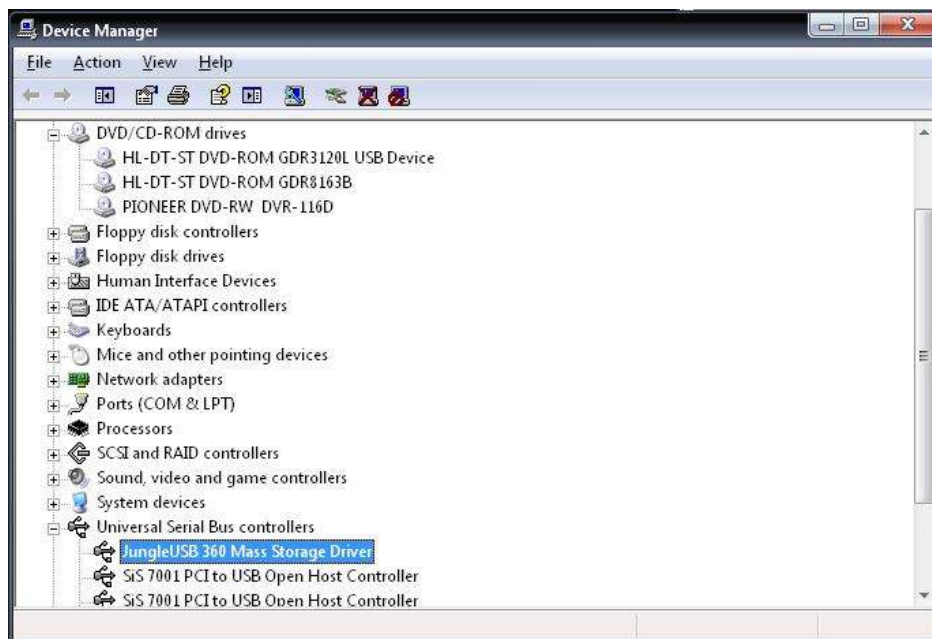

Now Start JungleFlasher and select the **Hitachi GDR3120** tab, Click the **USmodeB** button

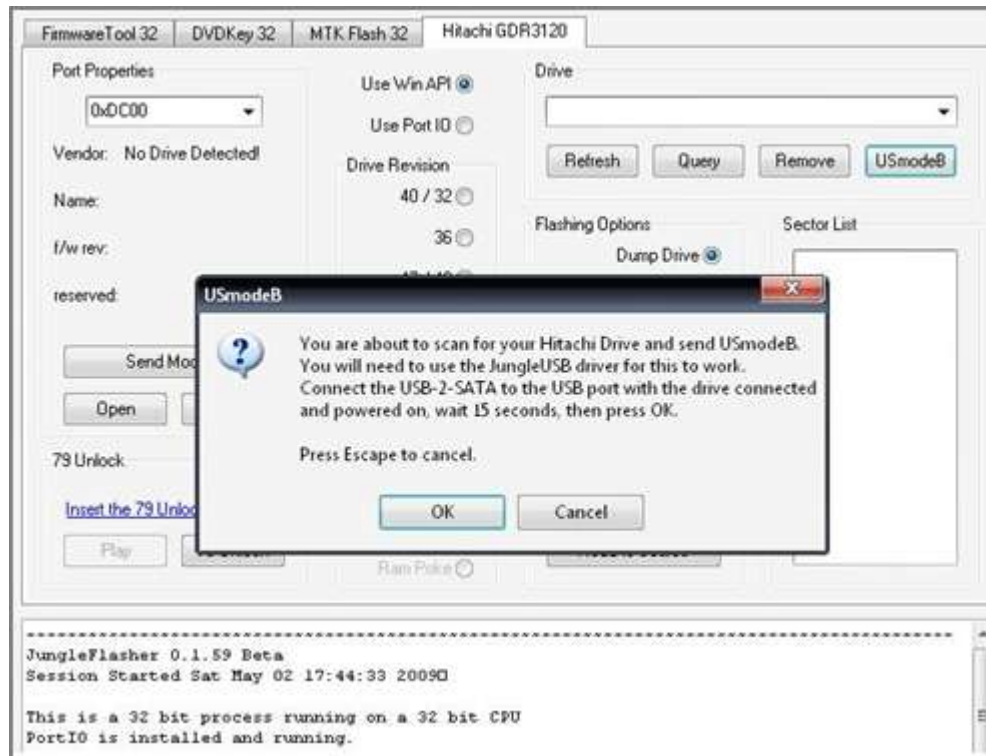

JungleFlasher will scan for any 360 Hitachi Drives connected via USB and send Mode-b Command to that drive. The Drive should now be selectable in the drop down box.

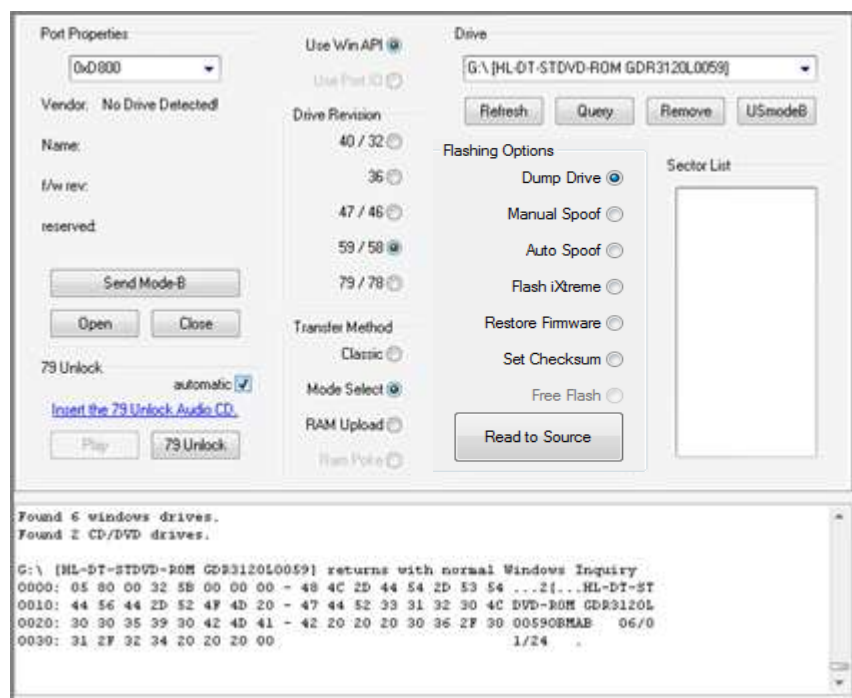


[CLICK TO RETURN TO HITACHI FLOWCHART](#)

## Dumping the Firmware from the drive (Pre v78)


Older ROM Versions of the drive, v32, v36, v40, v46, v47, v58 and v59 are dumped using **Classic Mode, Mode Select, or RAM upload**. For the purpose of the tutorial, I'll use **Mode Select**

**\*\* Dumping the firmware from a Drive Using 'Classic Mode' will be fooled by firmware stealth, this means, it WILL report as stock even though it isnt. \*\***


As the drive is in **ModeB** already, we simply ensure drive revision matches that of the drive

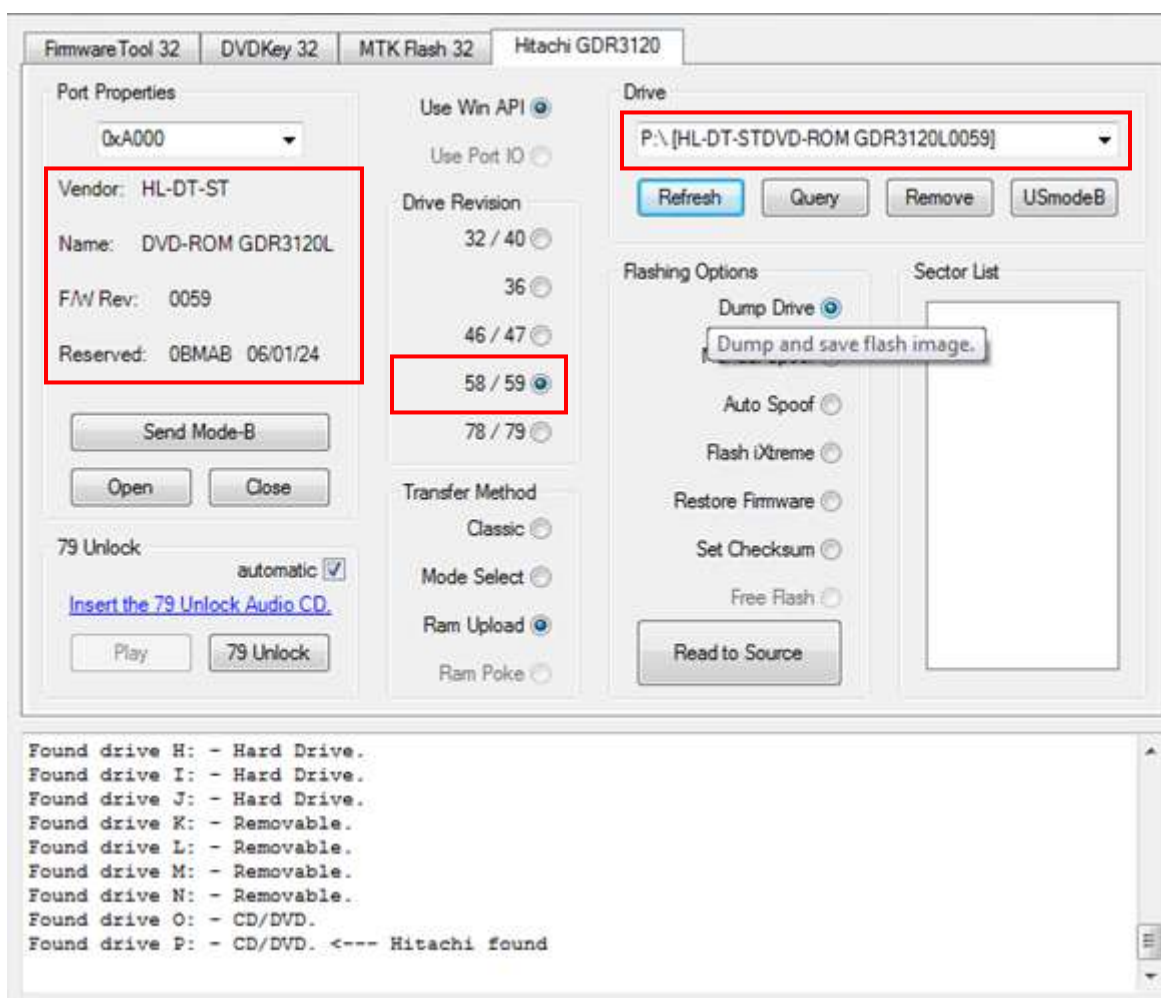

Select **Dump Drive** and **Mode Select**

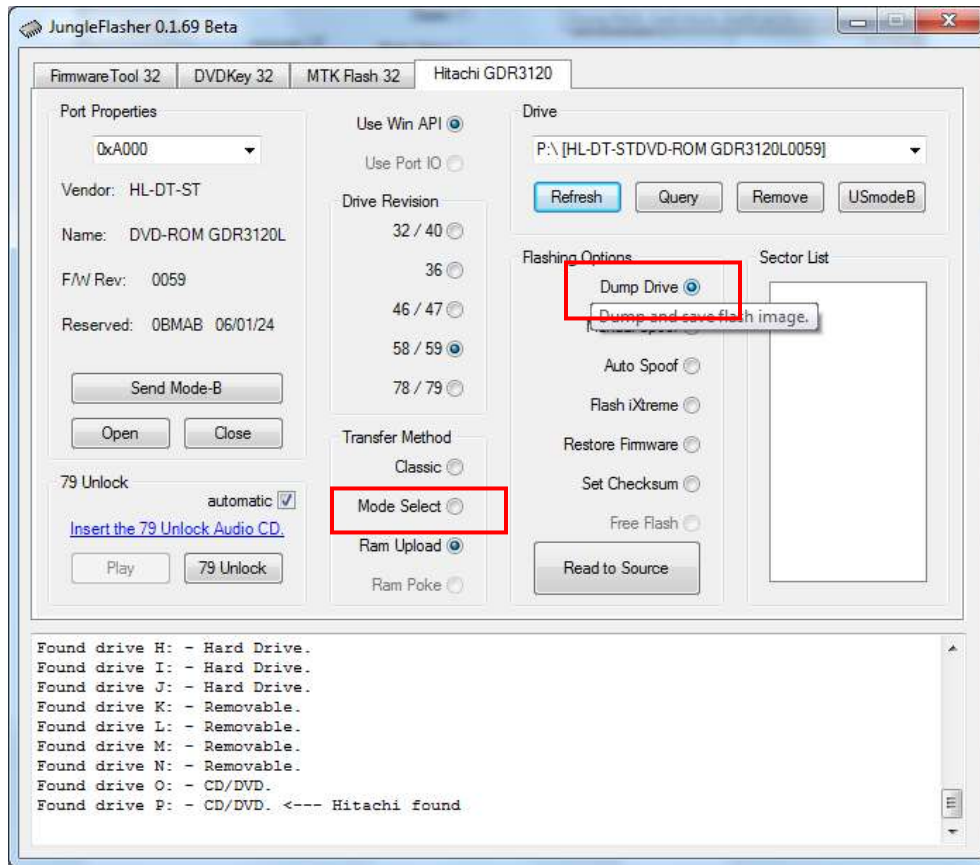

Then, click **Read to Source**

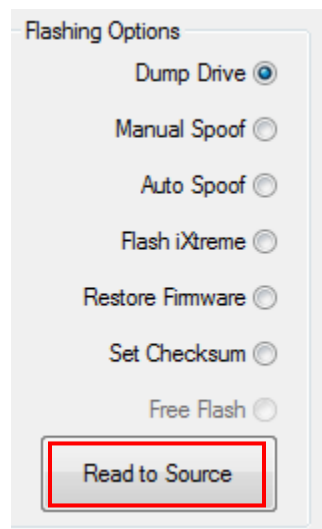


You should see something similar to below

```
0020: 30 30 35 39                                0059

Mode-B Done!
Scanning for hardware changes
Found 7 windows drives.
Found 3 CD/DVD drives.

Dumping f/w of Hitachi 0058/0059 by Mode Select Method via WIN32 API
UnLocked!
....
```

Once firmware is read, JungleFlasher will prompt you to save it.

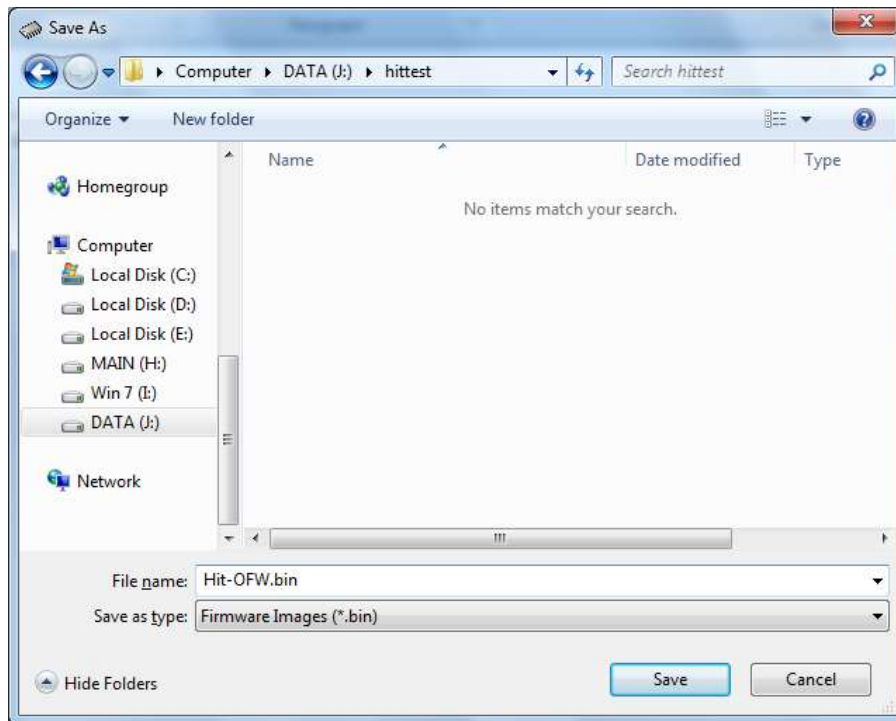

Upon saving the Firmware from the Drive, you can verify the key appears good and it reports as  
**GDR 3120 (ROM Ver)**



The **Running Log** should also show this data.

[\*\*FLASH iX FIRMWARE - CLICK HERE\*\*](#)



## UNLOCKING v79


[FIRST Ensure ModeB is set](#)

### V79 ONLY

The Hitachi v79 requires 'unlocking' via Audio CD which can be downloaded [here](#)

Burn the .bin, using the cue sheet in [IMGBurn](#) (done by right clicking .cue file and selecting "burn with imgburn") and write to CD-R

Insert the disc into the Hitachi v79, wait for it to spin up (windows media player may try to open! - just close it) then click **79 unlock**

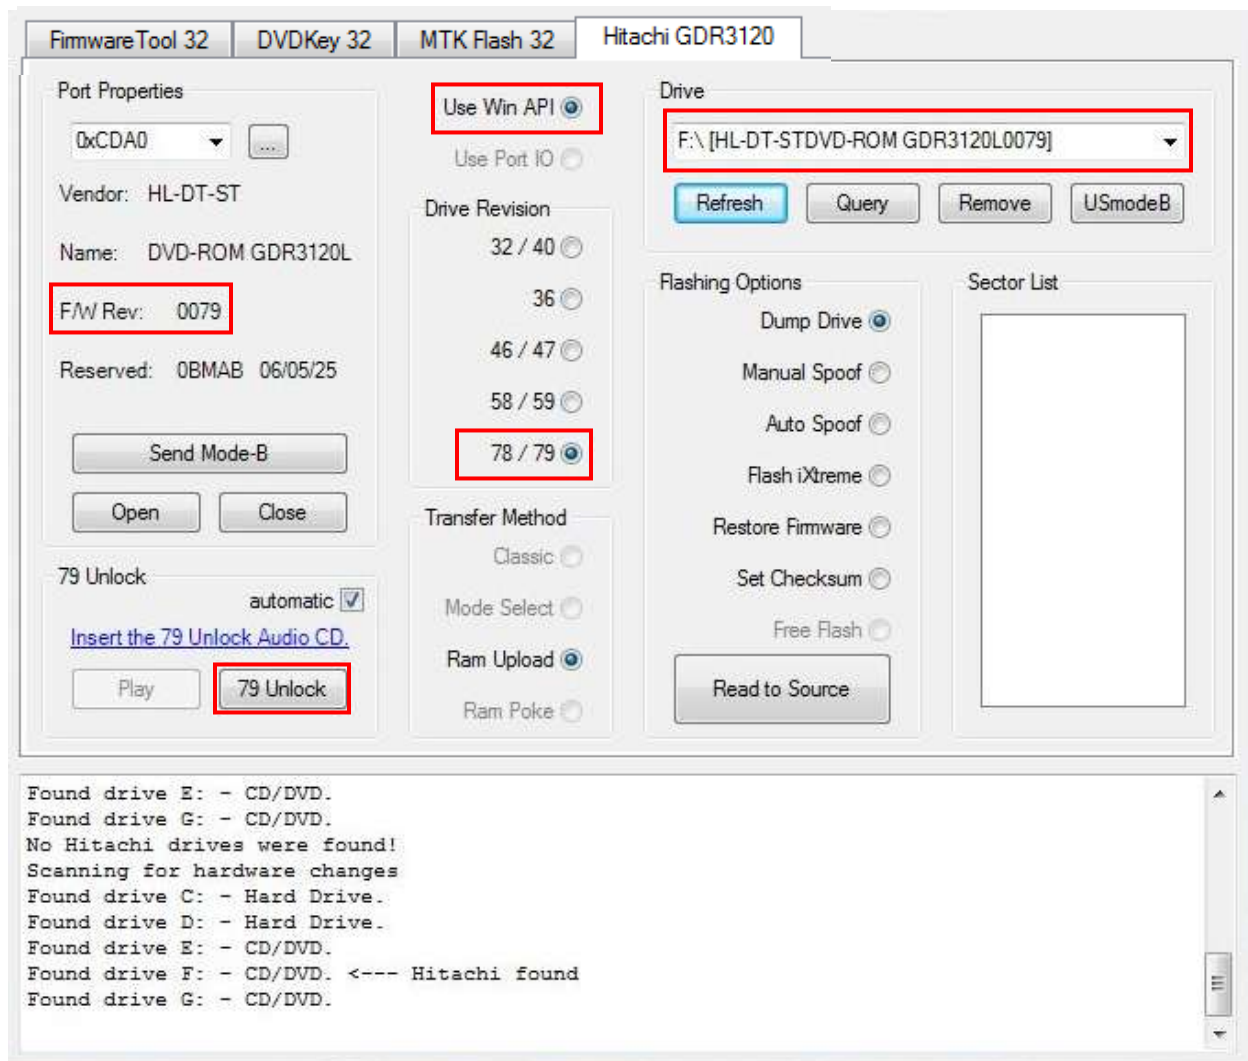

JungleFlasher should display a log similar to the one below.

```
Found drive E: - CD/DVD..
Found drive F: - CD/DVD. <--- Hitachi found
Found drive G: - CD/DVD..
Playing 79Unlock Audio CD
Pausing 79Unlock Audio CD, after 500mS
Ejecting 79Unlock Audio CD
Setting bit 3 @ 0x5BD
Executing code in Ram
Done!
```


The Drive is now unlocked!

**[UNLOCKED - PROCEED! NOW TREAT IT AS PER A 78 – CONTINUE FROM POINT IN FLOWCHART YOU WERE AT -CLICK HERE](#)**




## V78 / V79

Now, onto dumping the drive. With the V79 **unlocked**, or the v78 in **ModeB** We can now dump the drive using **RAM Upload** method

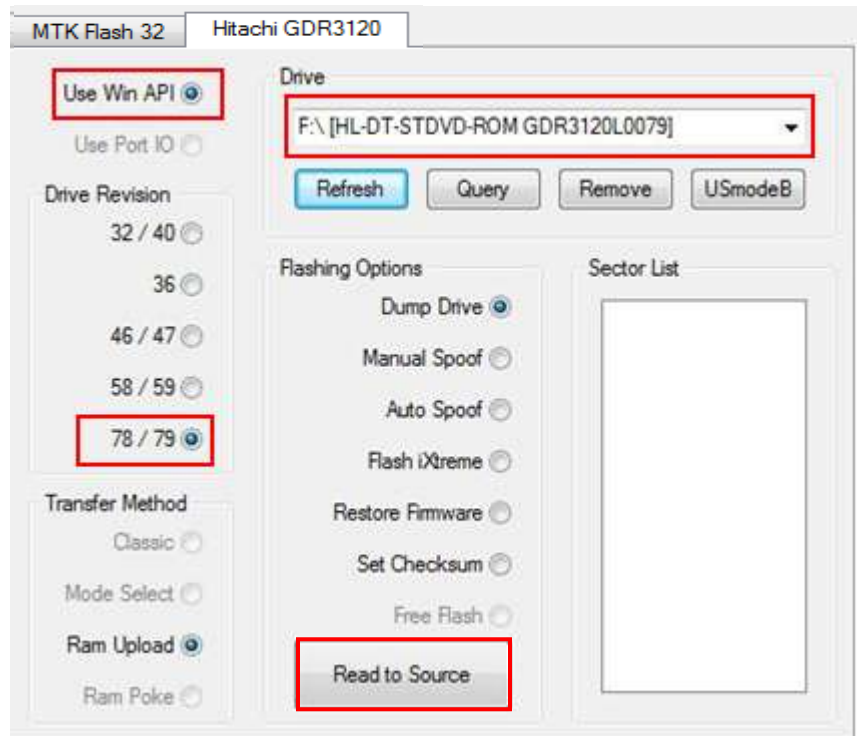

So, click **Read to Source**

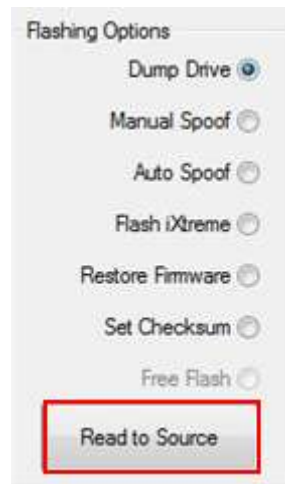


JungleFlasher will now dump the drive using **RAM Upload Method**

```
Found 3 CD/DVD drives.

Playing 79Unlock Audio CD
Pausing 79Unlock Audio CD, after 750mS
Ejecting 79Unlock Audio CD
Setting bit 3 @ 0x5BD
Executing code in Ram
Done!
Dumping f/w of Hitachi 0078/0079 by Ram Upload Method via WIN32 API
.....
```

Once it has read the Firmware it will prompt you to save the Firmware.

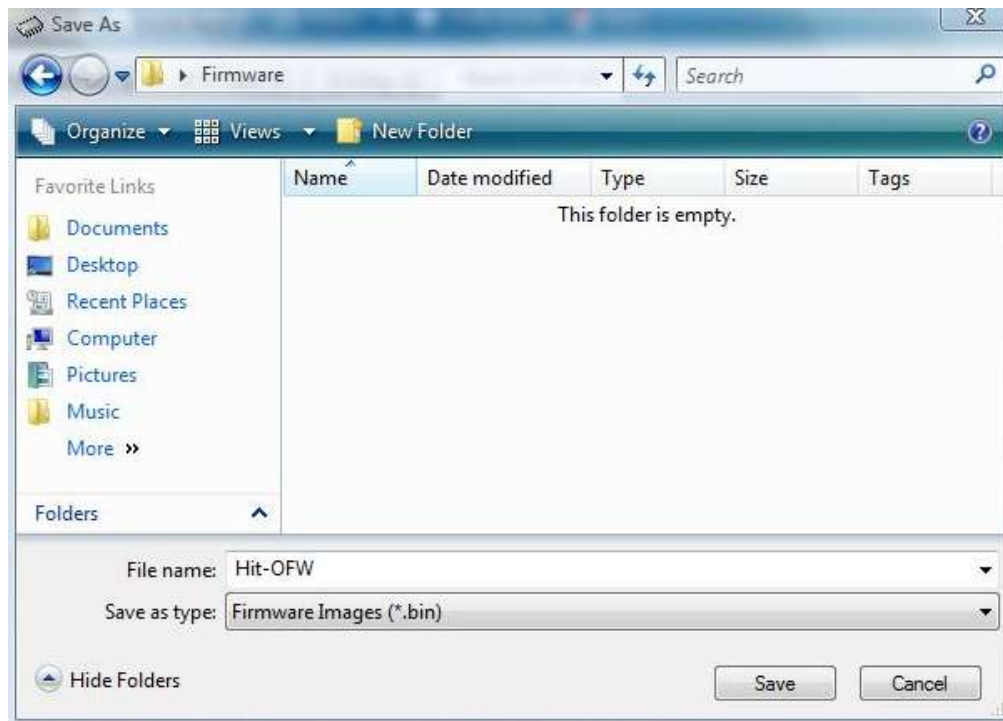

Once saved, it will open it as **Source** in **FirmwareTool32**.

Vendor	Model	Rev	Firmware Type	DVD Key @	4B00	0x00000000
Hitachi	GDR3120L	0079	Stock			D3D22723472F72364A6A665AE4534534
OSIG:[HL-DT-STDVD-ROM GDR3120L0079]						


**[FLASH iX – CLICK HERE TO PROCEED!](#)**

## **Flashing iXtreme to a stock Hitachi Drive**

Flashing iXtreme to a Hitachi has taken a huge step in development with JungleFlasher's methods.

JungleFlasher **WILL NOT** allow you to flash iXtreme over iXtreme, it will detect the checksum and detect its hacked by checksum and force restore first.


Typical error if user tries:

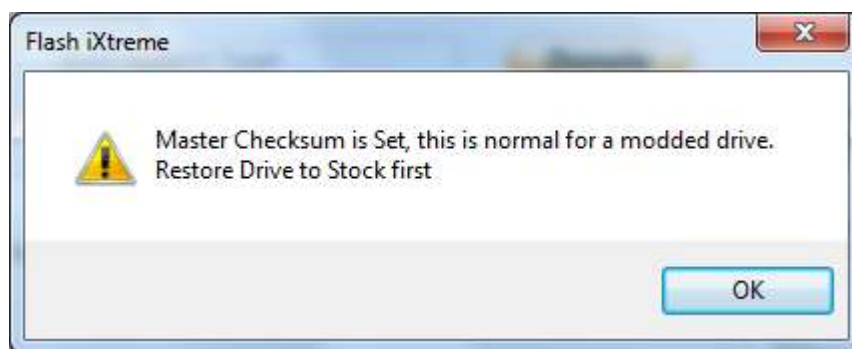


So, onto flashing iXtreme

You will need the **JungleFlasher Firmware Pack** for this to work.


With the drive in **Mode-B** (and Unlocked if a v79) simply select **Flash iXtreme** from the **Flashing Options** list

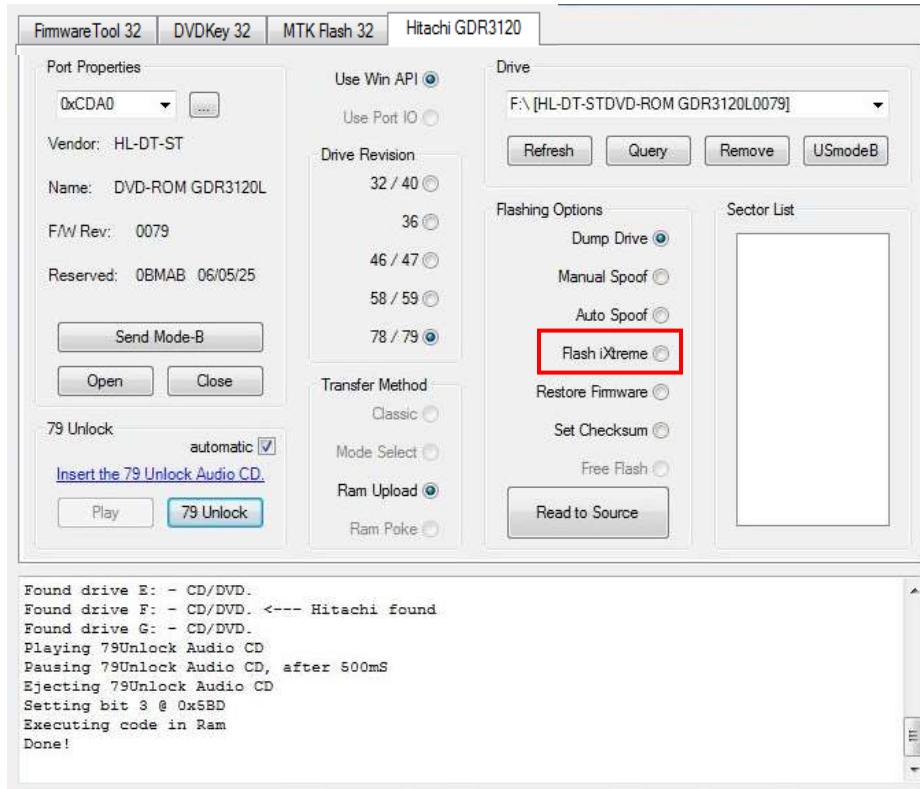


Then, click **Flash Hacked f/w**

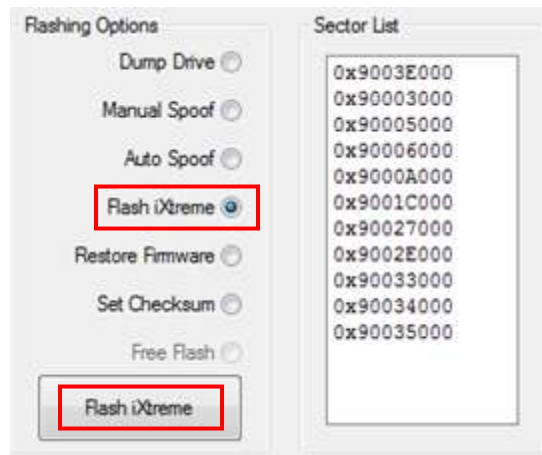

JungleFlasher will then dump the drive so it can compare sectors that will need to be written.




It will prompt you to save it. It's **heavily advised you do** just in case.

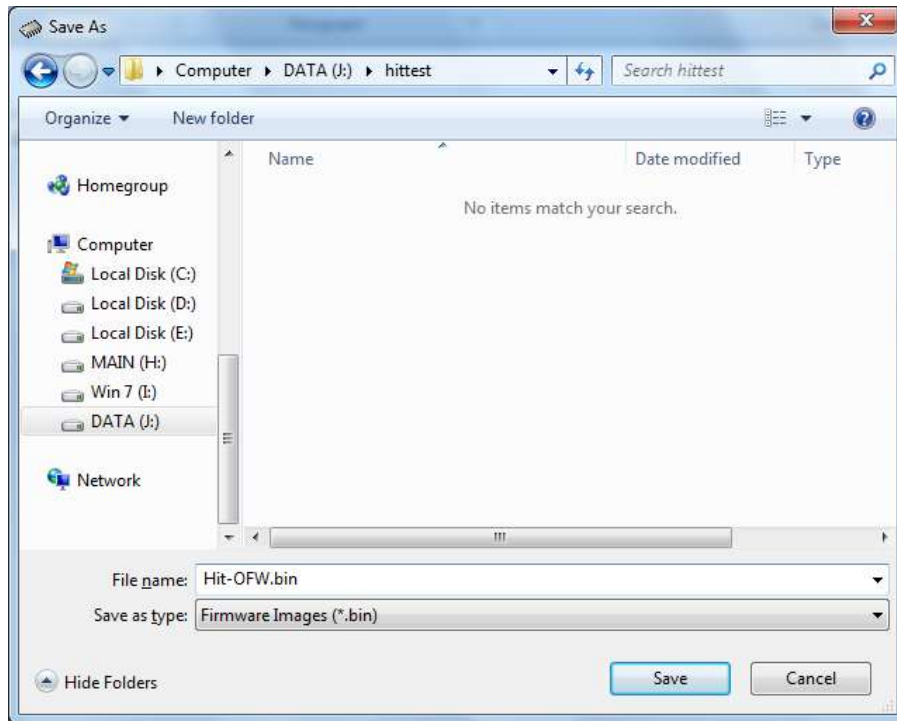

JungleFlasher will seemingly take control, don't worry, this is normal.

If you view the log, you see that JungleFlasher has automatically loaded iXtreme 1.51, copied all your data (key sector 90004000 isn't touched) into iXtreme, and flashed a test sector for stability.

The stability test should return as stable, if so, you will see this message.

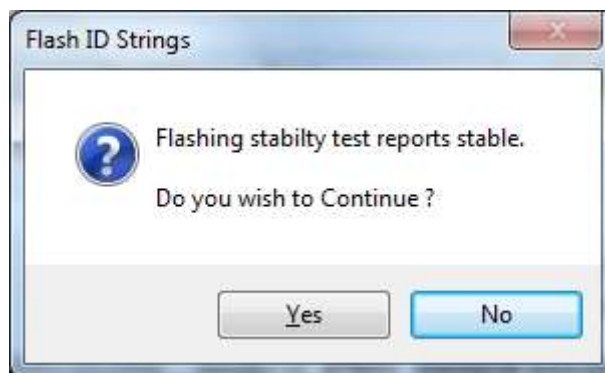

If you wish to proceed, click Yes

Again, JungleFlasher will take over and you will see it flashing the sectors like below:

```
Dumping Sector 9003F000:....  
Read back & compare completed, Flashing Stable!  
Repairing Test Sector.  
Flashing Sector 9003F000  
Done !  
Flashing Sector 9003E000  
Flashing Sector 90003000  
Flashing Sector 90006000  
Flashing Sector 9000A000
```

Once finished, JungleFlasher will verify the firmware written to the drive and report back

```
Flashing Sector 9002E000  
Flashing Sector 90033000  
Flashing Sector 90034000  
Flashing Sector 90035000  
Done !  
Write verify test..  
Dumping Flash:.....  
Read back & compare completed, Write Verified!  
Flash Complete !
```

Power Off – Disconnect drive, connect sata back to console and test!


**[YOU ARE FINISHED – RETURN TO START OF TUTORIAL](#)**

## Restoring from Hacked Firmware


As the title suggests, it is simply a reversal of flashing the Drive with Hacked Firmware. This also applies to Hitachi Drives Spoofed as other Drive types / Revisions.

Again, JungleFlasher will depend on the **JungleFlasher Firmware Pack** being in the same directory as **JungleFlasher.exe**

With the Drive in [Mode-B](#) (and [unlocked](#) if it's a v79 ) simply select **Restore Firmware** from the **Flashing Options** list

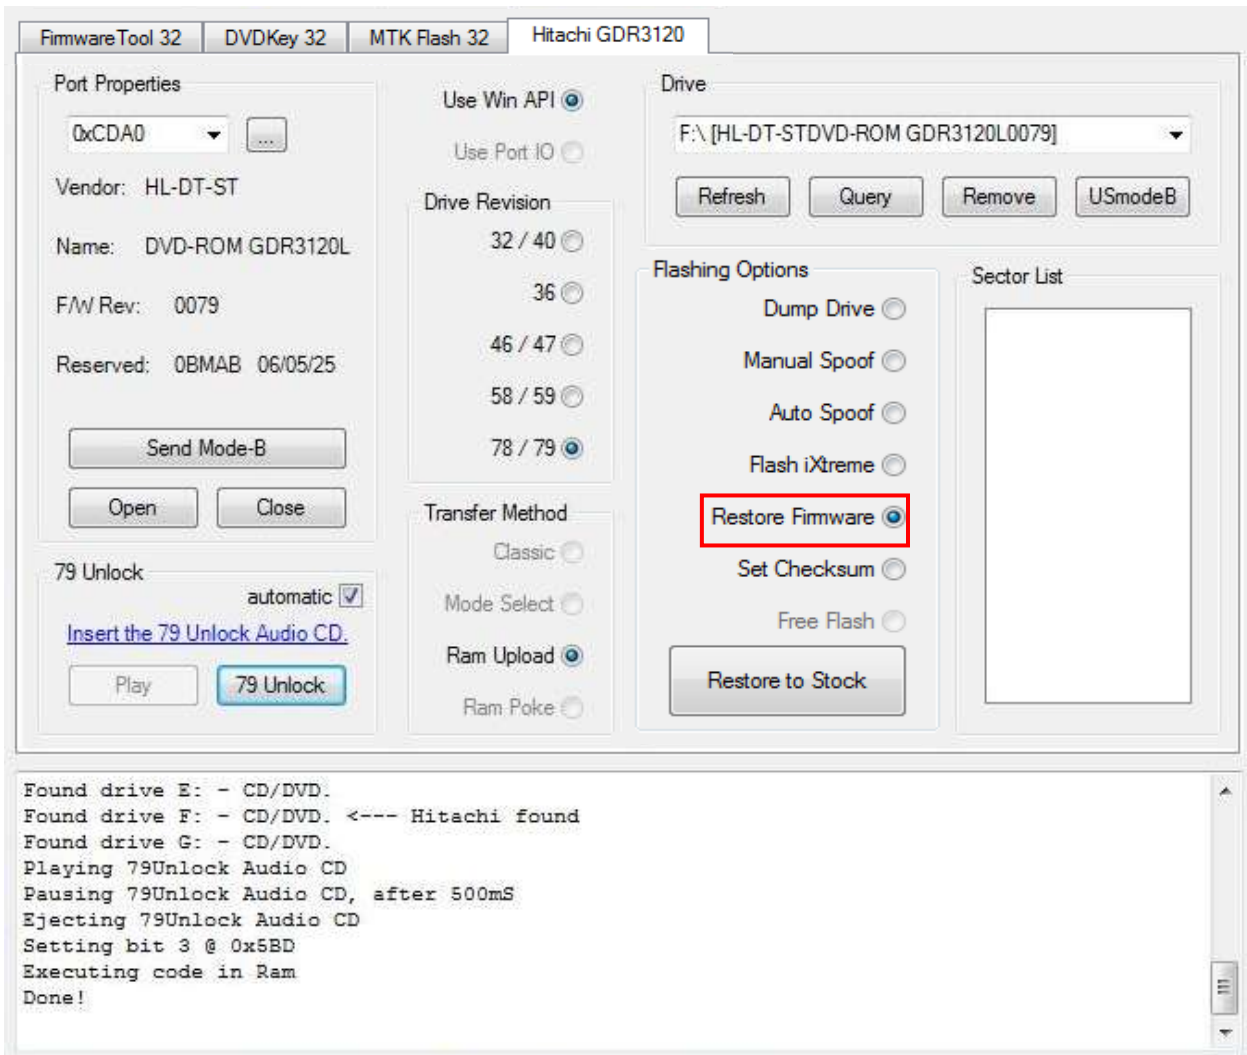

Then, click **Restore to Stock**

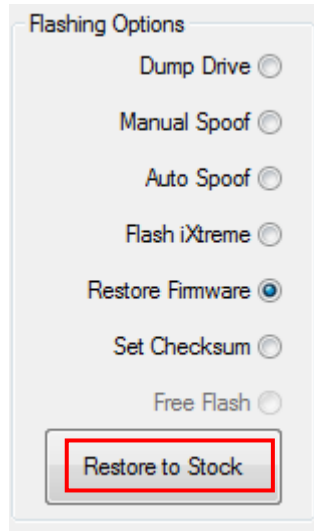

JungleFlasher will dump the Hacked Firmware from the drive, check key location and compare to the corresponding Original Firmware in the **Firmware Pack**

**JungleFlasher will take control throughout this.**


```
Found 3 CD/DVD drives.

Playing 79Unlock Audio CD
Pausing 79Unlock Audio CD, after 750mS
Ejecting 79Unlock Audio CD
Setting bit 3 @ 0x5ED
Executing code in Ram
Done!
Restoring Stock f/w to Hitachi 0078/0079 by Ram Upload Method via WIN32 API
Dumping Flash:.....
```

After it has dumped and compared the firmware, it will flash a test sector. If this flashes ok, it will report it has passed the **Stability Test**

It should show as below




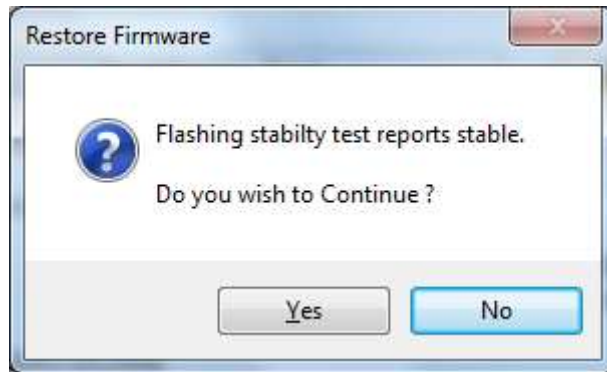

Click **Yes** to proceed

Again, JungleFlasher will take control and flash the sectors required

**It will then check the checksum and prompt you to fix the Checksum.**

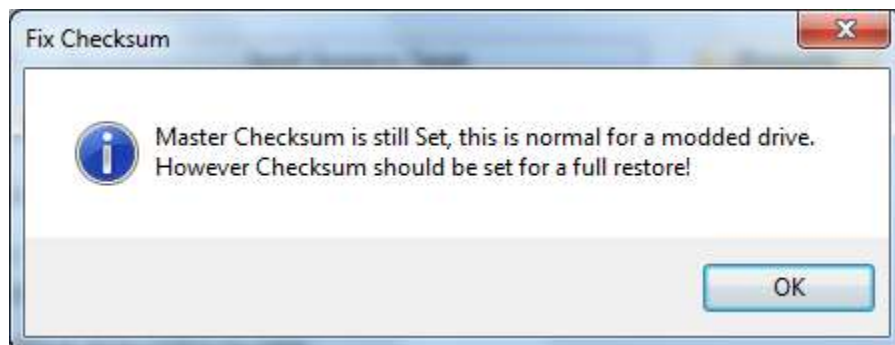

Clicking **Ok** will fix Checksum for you

**Check Log for confirmation**

```
Setting Checksum!  
Calculated Checksum 0x671788B9  
Actual Checksum      0x00000000  
Flashing Sector 9003E000  
Dumping Sector 9003E000:....  
Read back & compare completed, Write Verified!  
Flash Checksum Complete !
```

**[PROCEED TO FLASH iX FW](#)**

## Spoofing a Hitachi Drive to report as a Different Drive Revision / Version

If you wish to flash a Hitachi Drive using JungleFlasher and change the **Drive String ID**, you should follow the procedure of:

1. [Restore to Stock if necessary](#)
2. [Flash iXtreme to the Drive](#)

IF YOU HAVE FOLLOWED THE FLOWCHART YOU SHOULD BE STARTING HERE!

3. [Auto Spoofing](#) **OR** [Manual Spoofing](#)

### **WARNING – YOU MUST**

**Flash iXtreme to the drive first before Auto/manual Spoofing**

### **Manual Spoofing**


As usual you will need to first get the Drive into **Mode-B** ([v79 unlocked](#)) and assigned a drive letter (VIA / No Drivers, utilise PortI0)

The drive should, as above, be [flashed with iXtreme](#) to start

Open JungleFlasher and proceed to the **Hitachi GDR3120L** tab

Ensure correct **Drive Revision** is selected; choose chosen transfer method (Pre78 use **Mode Select** or **RAM Upload**, v78/79 users **can only use RAM Upload**)

Then, select **Manual Spoof** radio button, Then press **Manual Spoof** Button

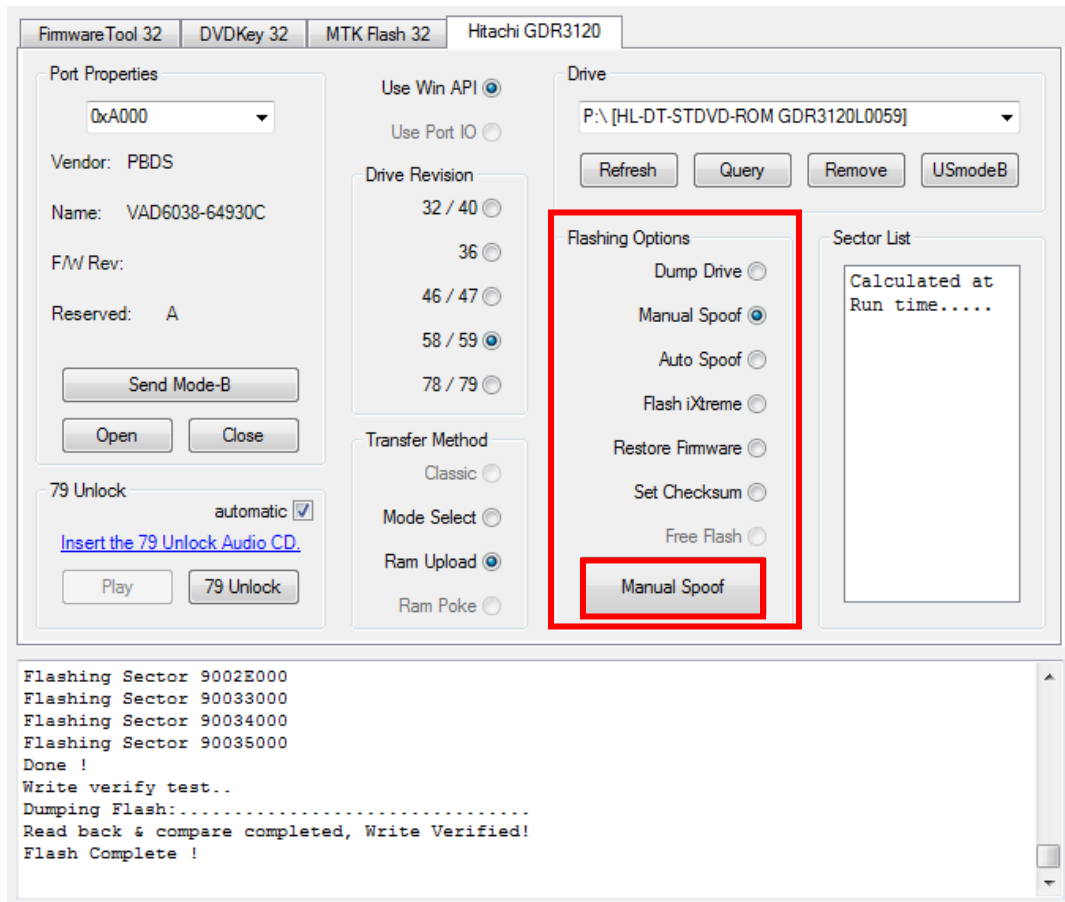

You will then be presented with the screen below,

You can alter the **drive key** by manually typing it/pasting it/loading a saved key.bin  
(**Key.bin can be saved** by loading donor drives firmware in FirmwareTool32 as Source and Clicking **Save Drive Key.**)

You can Change the **OSIG (ID String)** by selecting the desired drive from the drop down list,  
And IF you have selected a **LiteOn drive** from **OSIG list** then you are able to enter the **liteon Barcode** details by either:

1. If you have the **Inquiry.bin** from the Donor Lite-On, you can load it through **Load bin file** button and navigating to the file and opening it.
2. If you have the **Donor Lite-On Drive** to hand, you can manually type the Alphanumeric code on the top of the Drive like shown below

When you have selected **ALL** the sections you require to be changed, press the **OK** Button

Drive Key

Load key.bin F8F6D0A9C49AC7CD765F96092E6118E4 Check

Lite-On Barcode

Load bin file D608CG833907010F0 AOA1 Check

OSIG:

Current: HL-DT-STDVD-ROM GDR3120L0059

Spoofed As:

OK Cancel

**JungleFlasher will then read, compare and carry out a test flash and ask if you wish to continue! Select YES, Manual spoofing will be carried out!**


Flash Keys

Flashing stability test reports stable.  
Do you wish to Continue?

Yes No

1 Sector Differences Found  
Flash Stability Test  
Flashing Sector 9003F000  
Dumping Sector 9003F000:....  
Read back & compare, complete, Flashing Stable!  
Repairing Test Sector.  
Flashing Sector 9003F000  
Done !

The example below is a Hitachi – manually spoofed to show as a Benq!

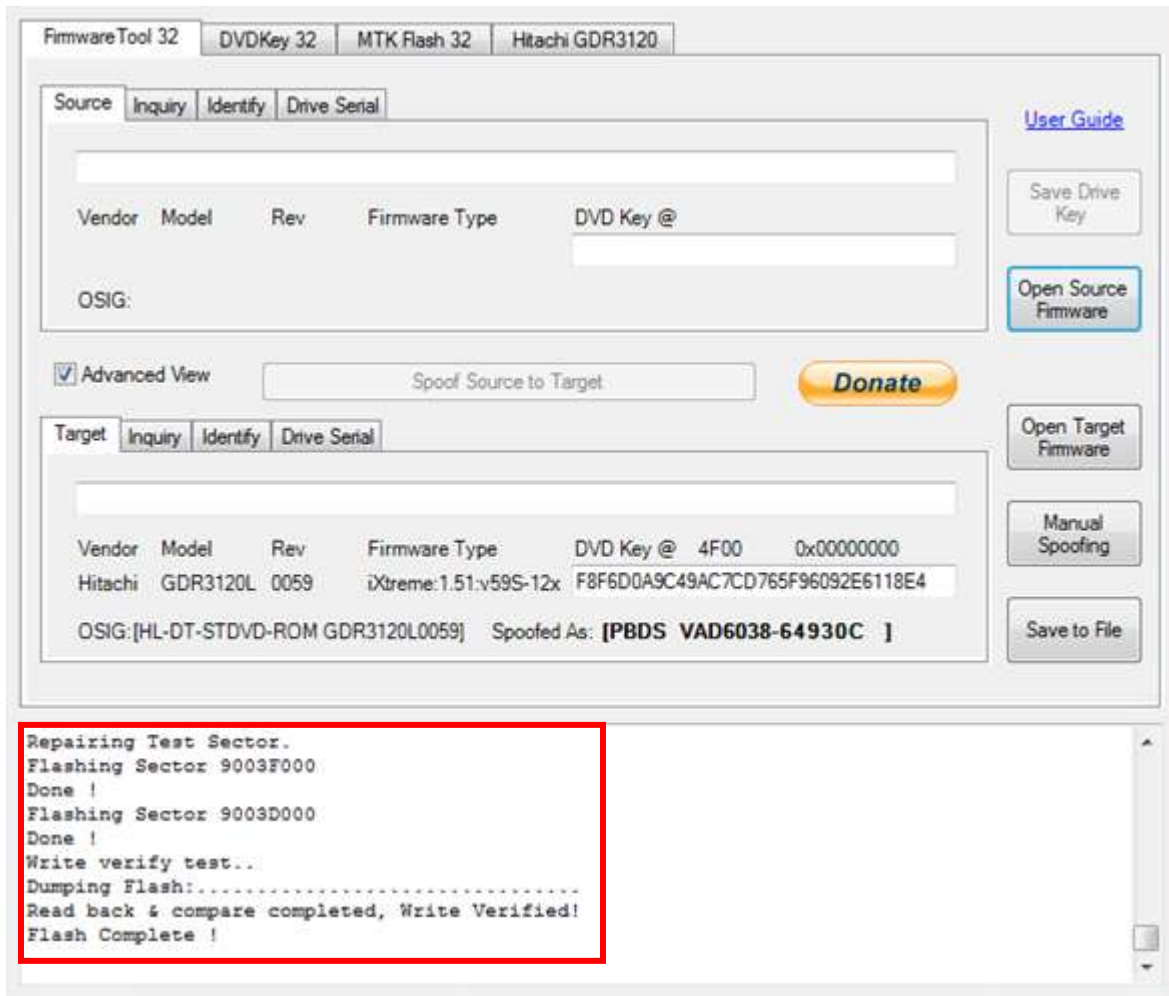

Power Off – Disconnect drive, connect SATA back to console and test!

**Job Done 😊**

**[YOU ARE FINISHED – CLICK HERE TO RETURN TO START OF TUTORIAL](#)**

## Auto Spoofing a Hitachi

As with all Hitachi Tasks, you must set [Mode-B](#) (and [unlocked](#) if v79) first, have a drive letter assigned if using **Win API**, or, PortIO for VIA / No Drivers.

**Ensure Drive is [flashed with iXtreme](#) prior to spoofing!**

Proceed to the **Firmwaretool 32** tab

Click **Open Source Firmware** button, load the Dumped firmware file from the donor drive.

In this example from a Benq drive!


The screenshot shows the FirmwareTool 32 application window. The 'Source' tab is active, displaying the file path 'C:\BENQ-OFW.bin'. Below this, a table lists the drive's metadata:

Vendor	Model	Rev	Firmware Type	DVD Key @
Benq	VAD6038	64930C	Stock	A858D16A78F40CEF9E016C83F8E2C80A


The OSIG is listed as [PBDS VAD6038-64930C]. To the right of the Source tab are buttons for 'Save Drive Key', 'Open Source Firmware', 'Open Target Firmware', 'Manual Spoofing', and 'Save to File'. A 'Donate' button is also present. Below the Source tab is a 'Target' tab with similar fields. At the bottom, a log window shows the following output:

```
Loading firmware file C:\BENQ-OFW.bin
MD5 hash: 79f6bac5196d6f425f0cbc3beead2b75
Inquiry string found
Identify string found
Drive key @ 0xA030 A858D16A78F40CEF9E016C83F8E2C80A
Firmware Osig: [PBDS VAD6038-64930C ]
Firmware is: Stock
```


Now select the **Hitachi GDR3120** tab, select the **Auto Spoof** radio button. Then press **Auto Spoof** button

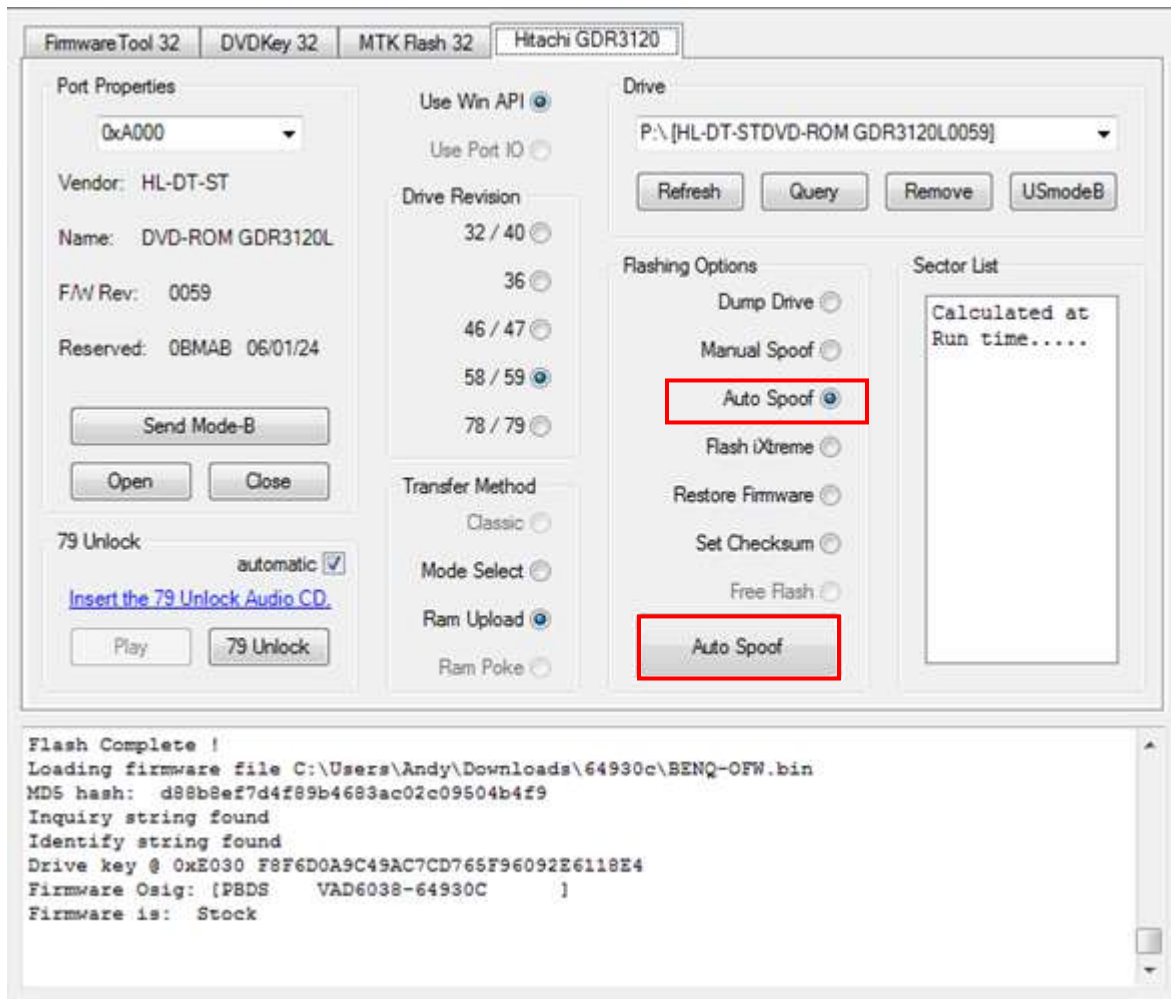

Junglesflasher will then test flash a sector for stability check and ask for confirmation to proceed! Select **YES!**

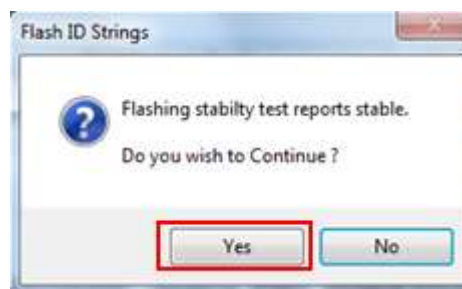

Junglesflasher will then proceed to read, compare and write to drive – **Firmwaretool 32** tab will automatically open to show you the **source** (the drives previous firmware) and the **target** (the Firmware that is now on your drive – including the spoof information)

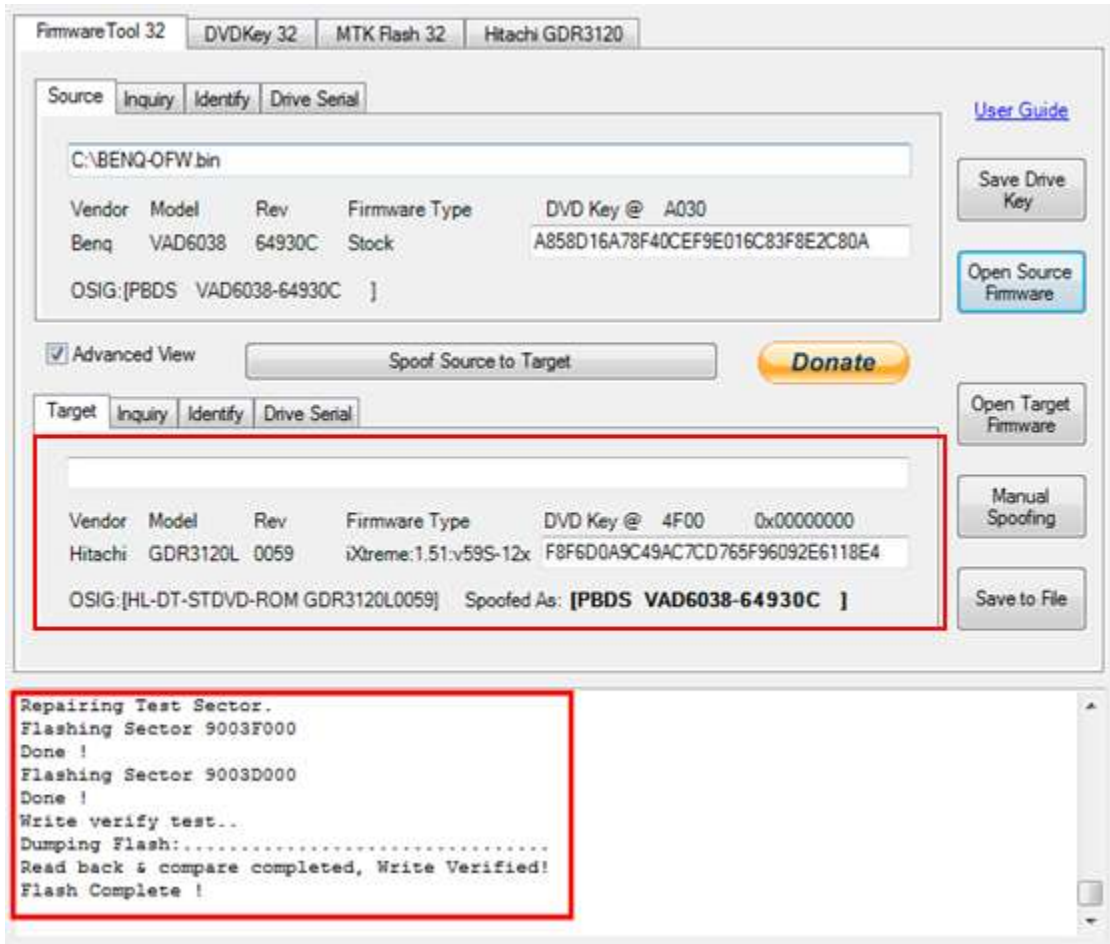

Power Off – Disconnect drive, connect SATA back to console and test!

**Finished! 😊**

**[YOU ARE FINISHED – CLICK HERE TO RETURN TO START OF TUTORIAL](#)**



## Lite-On PLDS DG-16D2S(-09C)

### Firmware versions 74850C , 83850C , 83850C v2, 93450C

#### Overview

With the release of the 83850C firmware , LiteOn drives required two totally different methods. With the release of the 83850C v2 and the 93450C there **was** no known way to extract the key. However there is now a method to dump the whole FW from any of these LiteOn drives! (*which is the ONLY method to get the key from the 83850C v2 & the 93450C*) Although MRA method works on all (current) LiteOn's - DVDKey32 / LO83Info will always remain the simpler method to obtain info from earlier drives.

The **74850C** requires additional hardware (it **requires** the utilization of a RS232 to TTL serial hardware, or a popular variant such as **Xecuter CK3 Pro or Xecuter CK3 Lite with the Xecuter Probe (v1 or v2)** or **Maximus USBXtractor & powerunit** or or **Maximus Xtractor (with optional spear)** to obtain the drive specific data (key/inquiry/identify/Serial) which once extracted are used to create the dummy.bin

Whereas the **83850C v1** does **NOT** require additional hardware and can be dumped/flushed using only a SATA connection

The key/inquiry/identify/serial files are merged into a dummy.bin (this allows for easy manipulation of the drive info for placing into the iXtreme firmware). They contain information that is required for proper identification and security related issues.

The **83850C v2** was quickly released to combat key retrieval by the earlier methods so key retrieval using 83850C v1 or original method was no longer an option! This change occurred around July/Aug 09 drive manufacture dates. There is no outward difference between the 83850C v1 and the 83850C v2 – the only way to discover which you have is to try the 83850C v1 method! If successful you have the version 1 – IF NOT Jungleflasher will tell you, you have an 83850C v2 and Lo83 function is ONLY for v1.


The **93450C** quickly followed – Once again key retrieval was not an option with simple sata commands or probe used for 74850C

Now available, is a method to dump the whole firmware from ALL current LiteOn Drives – The MRA Hack method is a little more complex than previous methods and requires some soldering skills and cutting and reconnection of traces on the PCB! However there are now some other options available – the best of these are described in this tutorial.

## **WITH THIS IN MIND – IT SHOULD ONLY BE ATTEMPTED BY SOMEONE WITH SOME PREVIOUS SKILL OF WORKING WITH ELECTRONICS / SOLDERING**

It is recommended to use the original (Simpler) methods for the 74850C and the 83850C v1.  
The FULL firmware dump can be performed on these drives – BUT it is a lot easier and less likely  
to go wrong if using the earlier methods described in this tutorial.

Here are some examples of those people without skill enough for the job!

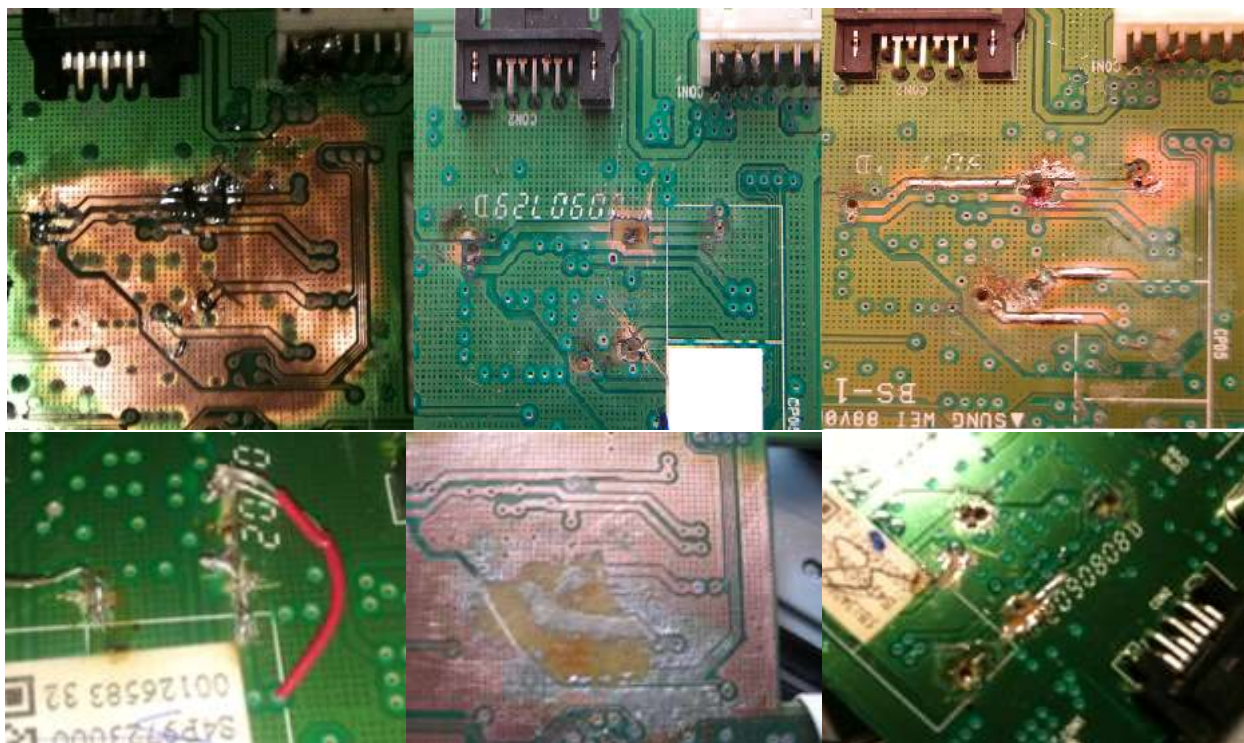

If you are going to produce results like these – Don't expect any sympathy!

And - expect to pay to have a professional fix it for you!

## **YOU HAVE BEEN WARNED!**

## LiteOn PLDS DG-16D2S


Which FW Revision?  
(read the label on drive lid)

IF you have previously flashed this drive and think you have its details in the Key Database –  
Consider this option! No need to re-dump or MRA the drive?

[– CLICK HERE –](#)

otherwise continue through the flowchart

DVD Key: Verified

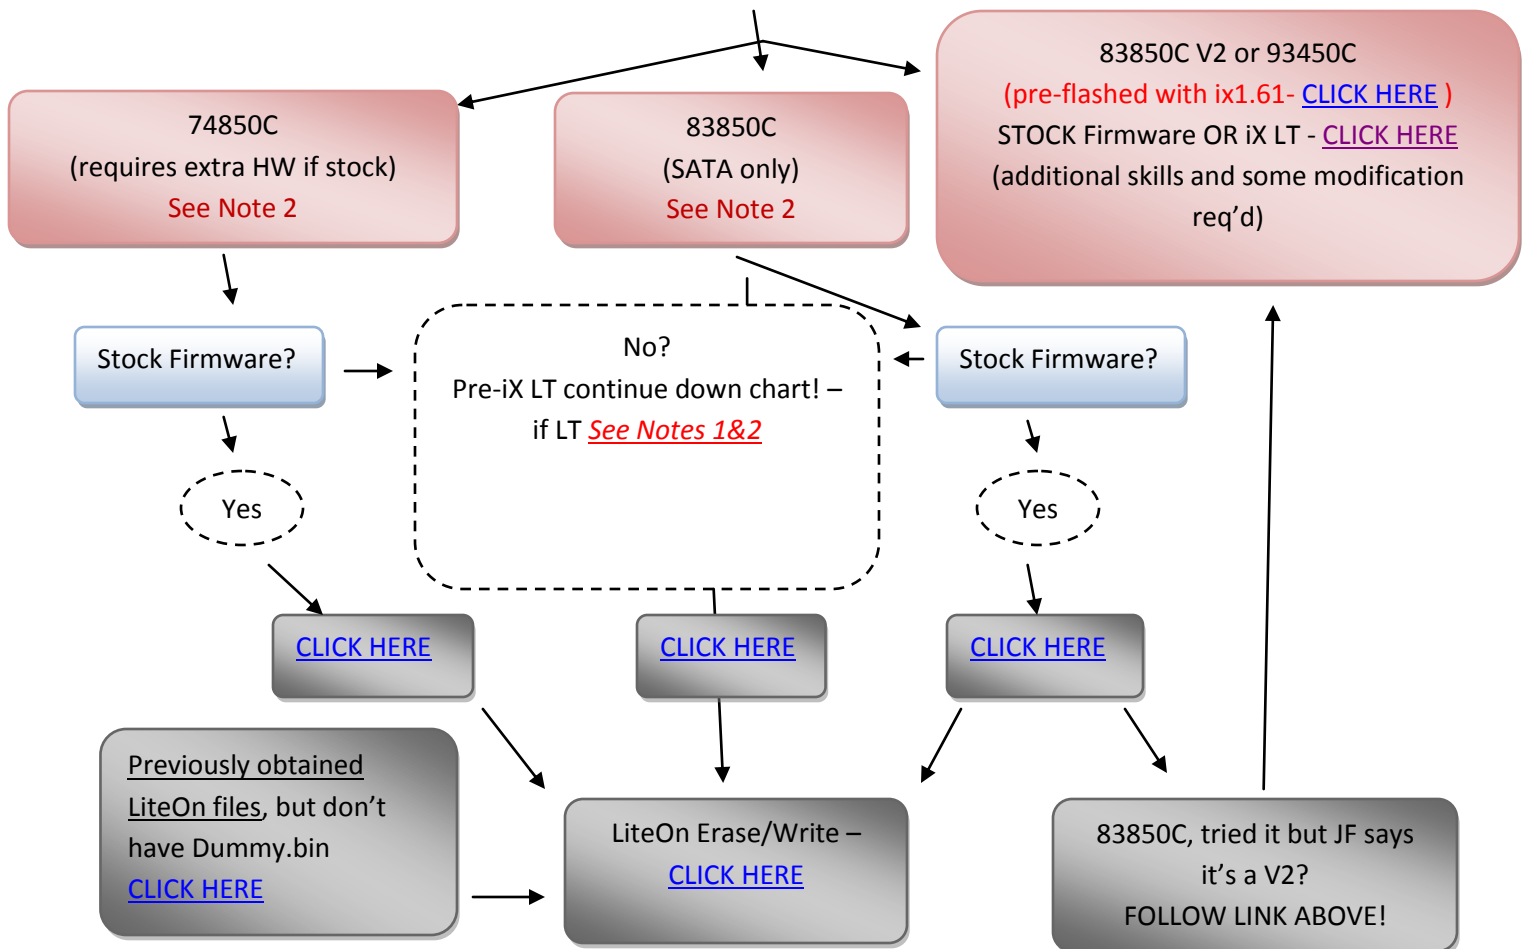

1. If your Drive has been previously flashed with iXtreme LT – then you will no longer be able to use 74850C or 83850C v1 or 'Dummy-from-iXtreme' methods to retrieve Dummy.bin! A full dump can still be performed using MRA method [CLICK HERE](#)
2. During Flashing process – IF your drive has been flashed before (i.e. NOT a VIRGIN DRIVE) OR you have **not** used MRA hack to get a FULL OFW, then you are going to get a statement like this: `No Calibration data in source` This is normal for a PRE-FLASHED drives or you have used a Dummy.bin – Ignore it!

If you wish to include this info from a 74850C or 83850C v1 VIRGIN drive – you must do a full dump using MRA style method - [CLICK HERE](#)

## LiteOn “HALF TRAY OPEN” method!

To obtain the key and other drive specific info from LiteOn drives the user must be familiar with the correct method to set “Half Tray Open” – this is especially important when doing 83850C fw'd drives as the drive must be set into this position twice during the extract!

### Using xbox360 to power the drive

If using a 360 to power the drive this method can be tricky to accomplish.

You need to power on the drive with **Eject status closed** but **Tray Half Open** – To do this using an Xbox 360 as Power source, eject the DVD drive, then, press eject to ‘close’ the tray. **Now this is the important part – you MUST remove the DVD power plug (the black cable with white plug on back of DVD-ROM) from the DVD Drive BEFORE it closes fully.**

Wait for a few seconds and replace the power plug into the DVD drive taking **extreme caution** to plug the plug the right way around – once done, the drive is now powered, console thinks its closed but it is in fact half open.

### Using a Connectivity Kit / Xtractor / power dongle to power the drive

For this method, we still need to power on the drive with the “half open tray”.


You need to power on the drive with **Eject status closed** but **Tray Half Open** – To do this using a connectivity kit/power unit/Xtractor as Power source, eject the DVD drive, then, press eject to ‘close’ the tray. **Now this is the important part – you MUST switch off the kit BEFORE it closes fully.**

Wait for a few seconds and switch the connect kit on again – drive is now at “half open tray”

(NOTE- if using Maximus power unit – you must **hold in** the eject switch till fully open then release to close – as it closes switch off, then switch back on!)

### Manually

The easiest way to do this is to use manual eject before powering the drive, to manual eject simply push this slider along until the tray is released.

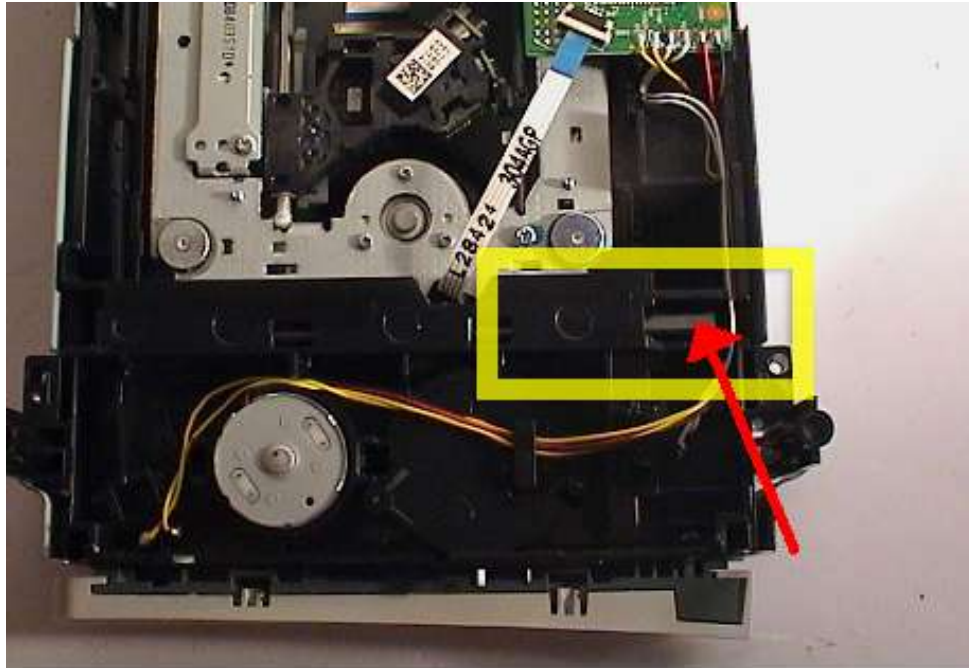

Then, pull the tray out fully and push half way back in. Now, hook it up to the PC using Connectivity Kit and SATA then power on. (If powering with Xbox – then DVD power plug must be removed before this process, with Xbox powered on – then power plug connected after tray position is set!)

Now, with the eject status set, Open JungleFlasher

**[RETURN TO FLOWCHART AND CONTINUE – CLICK HERE](#)**

## If you have LiteOn files from previous extractions/methods


Jungleflasher – maintains backwards compatibility with files that have been extracted from earlier methods!

**A FRESH extraction is recommended where possible – but the option remains available**


**For 74850C Files (Key.bin/Inquiry.bin/Identify.bin) – Read On!**

**For 83850C File (*unique.bin.key*) – [Click Here!](#)**

**For 74850C firmware** files (Key.bin/Inquiry.bin/Identify.bin) simply go to DVDKey32 tab,

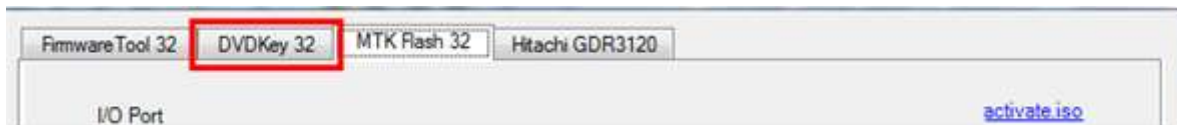

And press the **DummyGen** button – this will allow you to load each file into Jungleflasher which then creates a Dummy.bin and loads it as source. Ready for spoofing to target file and then to proceed onwards to erasing and writing!

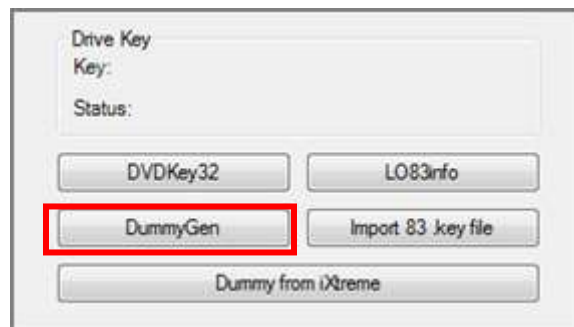

**[CLICK TO PROCEED TO FIRMWARE MANIPULATION](#)**




**For 83850C v1 firmware files (*unique.bin.key*)**

**Note:** If you wish to include calibration data from the 83850C v1 (VIRGIN drives ONLY) – you must do a full dump using MRA style method - [CLICK HERE](#) – if you are not bothered, continue!

Go to **DVDKey32** tab



Then press the **Import83.key** button

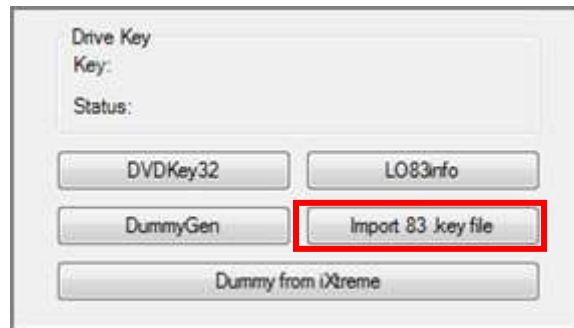

this will allow you to load the file into Jungleflasher which then creates a Dummy.bin and loads it as source. Ready for spoofing to target file and then to proceed onwards to erasing and writing!

**[CLICK TO PROCEED TO FIRMWARE MANIPULATION](#)**

## Obtaining Key/Inquiry/Identify and Dummy.bin from iXtreme flashed Lite-On Drives (**DOES NOT WORK ON iXtreme LT**)


LiteOn drives of either FW version that have already been flashed with iXtreme can be easily dumped using only SATA connection (no requirement for probe or TTL convertor) ***this is a function of the iXtreme firmware NOT a workaround for dumping stock drives!***

For this method, we still need to power on the drive with the “half open tray”.

### [FOR INSTRUCTIONS ON HALF OPEN TRAY – CLICK HERE](#)


Now, with the eject status set, Open JungleFlasher, you will be presented with the Welcome Screen. After a few seconds the main window will load.

Now, click the **DVDKey32 Tab**

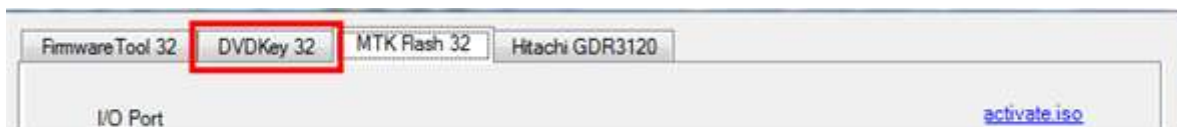


Select **Correct I/O port** (check for drive properties in the **Drive Properties** section) it should report as **PLDS DG-16D2S** (unless spoofed), you can choose to dump dummy.bin only as opposed to all 5 files (Key, Inquiry, Identify, Serial **and** dummy.bin) as dummy.bin contains all the information of the other 4 files.




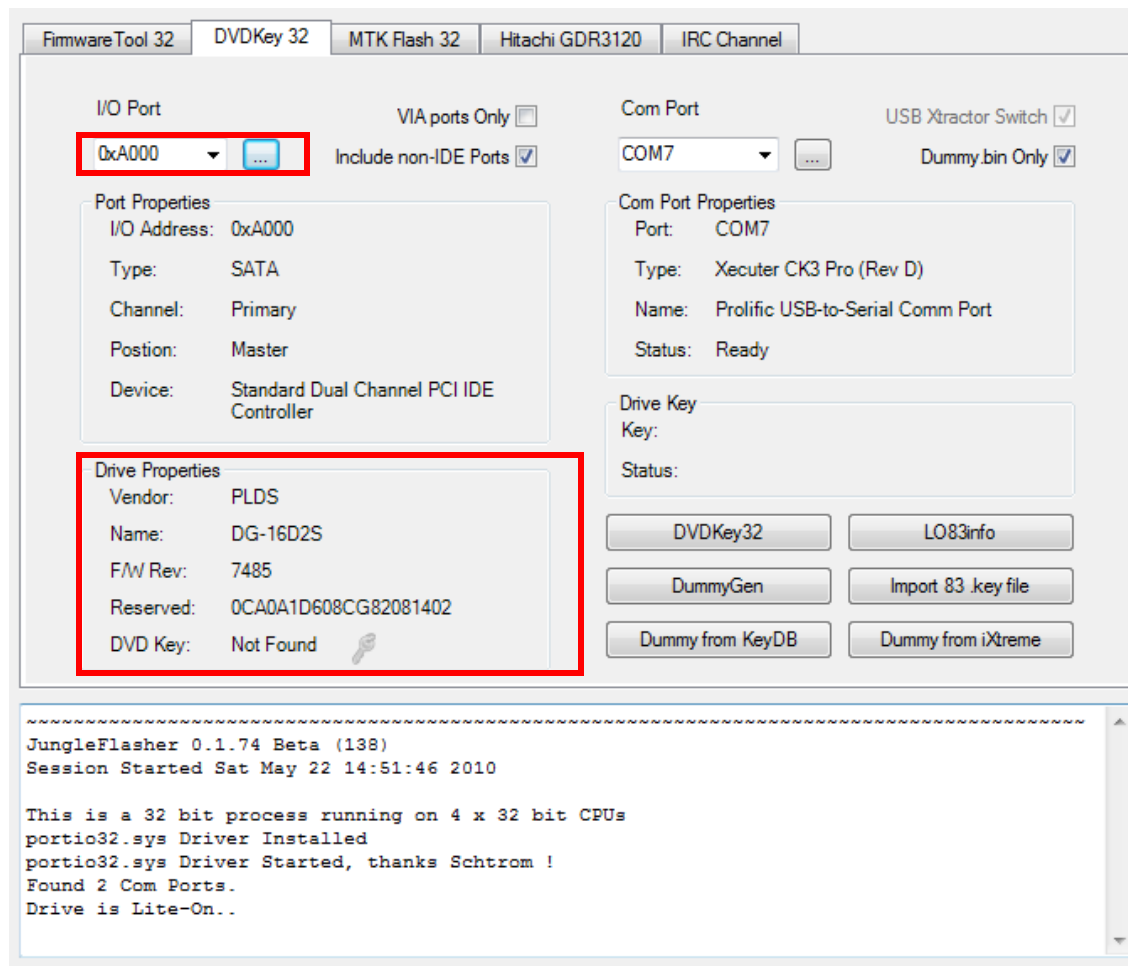

Then, simply click **Dummy from iXtreme**.

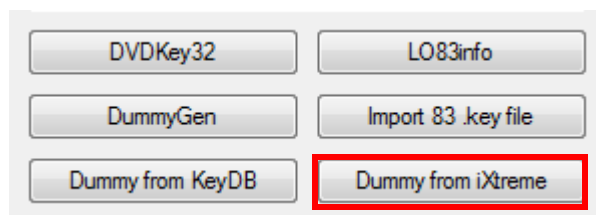

Save as prompted,

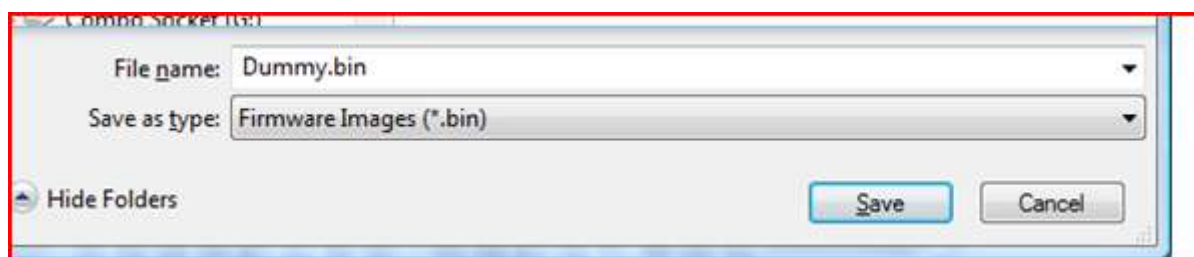

[CONTINUE WITH FIRMWARE SPOOF – CLICK HERE](#)

## Extracting Key and drive info from 74850C LiteOn

**Note:** If you wish to include calibration data from the 74850C (VIRGIN drives ONLY) – you must do a full dump using MRA style method - [CLICK HERE](#) – if you are not bothered, continue!


You need to power on the drive with **Eject status closed** but “**Tray Half Open**” –

**[FOR INSTRUCTIONS ON HALF OPEN TRAY – CLICK HERE](#)**

With the correct tray status


Open JungleFlasher,

As you are using **DVDKey 32** to obtain data, select **DVDKey32 Tab**

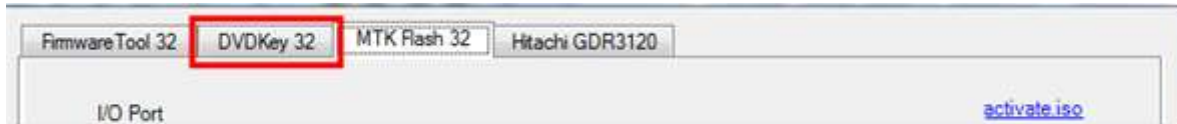


Check **Drive Properties** for **PLDS DG-16D2S**.


Select **Correct I/O port** (check for drive properties in the **Drive Properties** section)

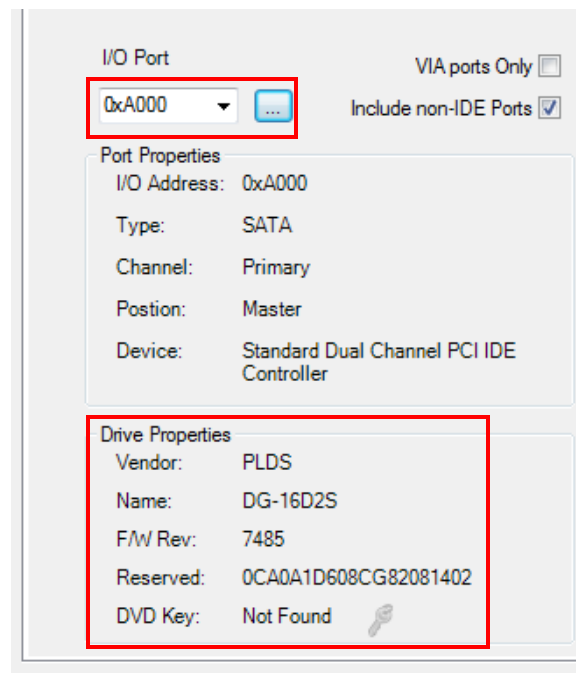


Select **COM port** (relavant to your setup – shown in table below),  
optionally, choose to dump dummy.bin only (shown in red)as opposed to all 5 files (Key,  
Inquiry, Identify, Serial **and** dummy.bin).



**USB Xtractor** user should enable **USB Xtractor Switch** check box (shown in blue)





**Right-click** on **DVDKey32 button** for time delay settings if you require a little settling time to  
ensure probe is correct position before Jungleflasher attempts to read the key (time after  
button press before key read starts)

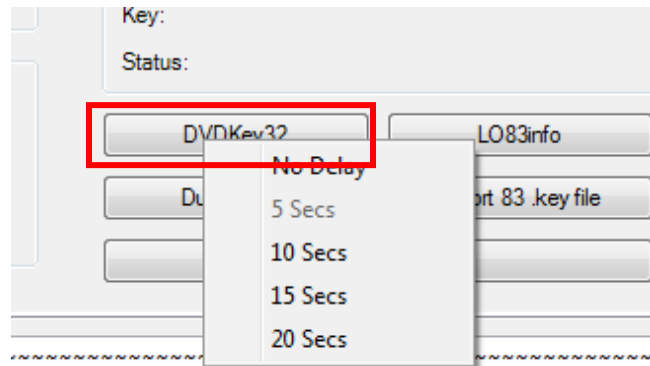

then **insert probe / spear** into R707 via (as per table below),

## PROBE VARIATIONS AND LED INDICATION AS FOLLOWS

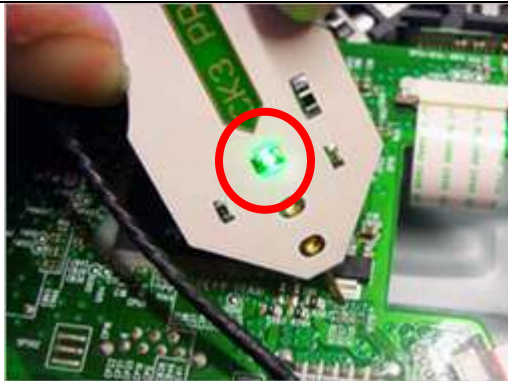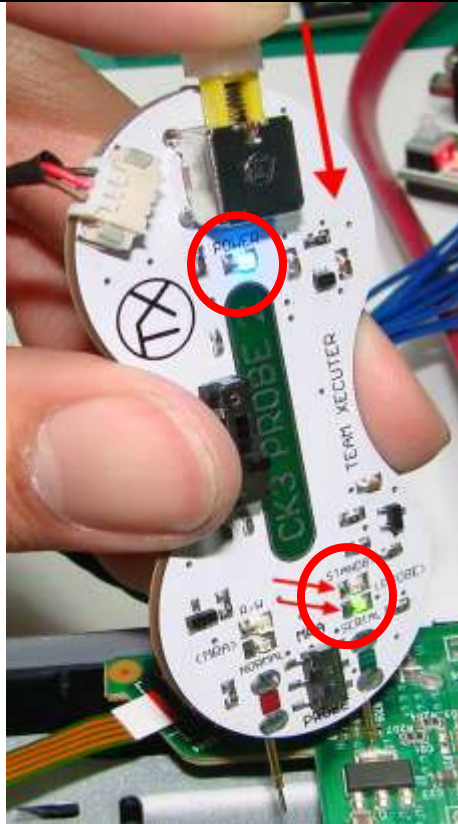

CHECKED / SELECTED THIS	WHAT YOU SHOULD SEE	DO THIS
<div><div>Com Port<div>USB Xtractor Switch <input checked="" type="checkbox"/></div><div>COM7<div>...</div>Dummy.bin Only <input checked="" type="checkbox"/></div></div><div>Com Port Properties<div>Port: COM7</div><div>Type: Xecuter CK3 Pro (Rev D)</div><div>Name: Prolific USB-to-Serial Comm Port</div><div>Status: Ready</div></div></div> <p>Using USB cable to connect (can also use serial)</p>	<div></div> <p>CK3 PROBE</p>	<div><div>BLUE POWER LED LIT</div><div>GREEN LED LIT (once probe touches R707 to indicate a good circuit/connection)</div></div> <p>PRESS DVDKey32 button to commence the read sequence</p>
<div><div>Com Port<div>USB Xtractor Switch <input checked="" type="checkbox"/></div><div>COM7<div>...</div>Dummy.bin Only <input checked="" type="checkbox"/></div></div><div>Com Port Properties<div>Port: COM7</div><div>Type: Xecuter CK3 Pro (Rev D)</div><div>Name: Prolific USB-to-Serial Comm Port</div><div>Status: Ready</div></div></div> <p>Using USB cable to connect (can also use serial)</p>	<div></div> <p>XECUTER PROBE 2 (in PROBE v1 MODE)</p>	<div><div>Mode switch to PROBE,</div><div>BLUE POWER LED LIT (power supplied to probe)</div><div>GREEN CONENCTION LED LIT - (indicates good connection to R707 circuit)</div><div>ORANGE STANDBY LED EXTINGUISHED (safety circuit disengaged)</div></div> <p>PRESS DVDKey32 button to commence the read sequence</p>


**BLUE** POWER LED  
LIT

**GREEN** LED LIT

(once probe touches R707 to indicate a good circuit/connection)

PRESS  
**DVDKey32**  
button to commence the read sequence
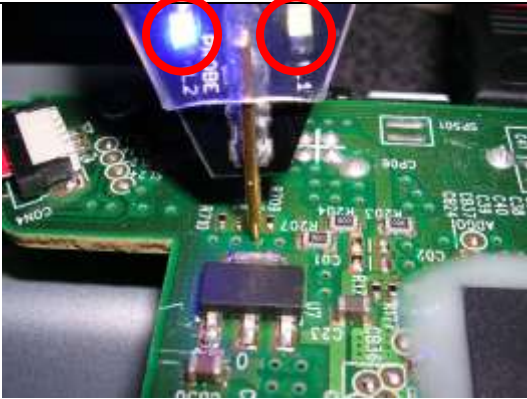
<div><div>Com Port</div><div>COM8</div><div>Com Port Properties</div><div>Port: COM8</div><div>Type: 360 Xtractor</div><div>Name: USB Serial Port</div><div>Status: Ready</div></div> <div>Using USB Cable to connect (can also use serial)</div>	<div></div> <div>MAXIMUS SPEAR</div>	<div><div>GREEN POWER LED LIT</div><div>BLUE CONNECTION LED LIT (when probing R707 to indicate good connection /circuit)</div></div>	<div>PRESS DVDKey32 button to commence the read sequence</div>
<div><div>Com Port</div><div>COM3</div><div>Com Port Properties</div><div>Port: COM3</div><div>Type: USB Xtractor</div><div>Name: USB Serial Port</div><div>Status: Ready</div></div> <div>USB ONLY</div>	<div></div> <div>USBXtractor</div>	<div><div>BLUE LED SHOWING when in contact with R707 and ready to read</div></div>	<div>USBXtractor Users can press the button on probe to start DVDKey32 extraction process (if ticked on DVDtab screen)</div>

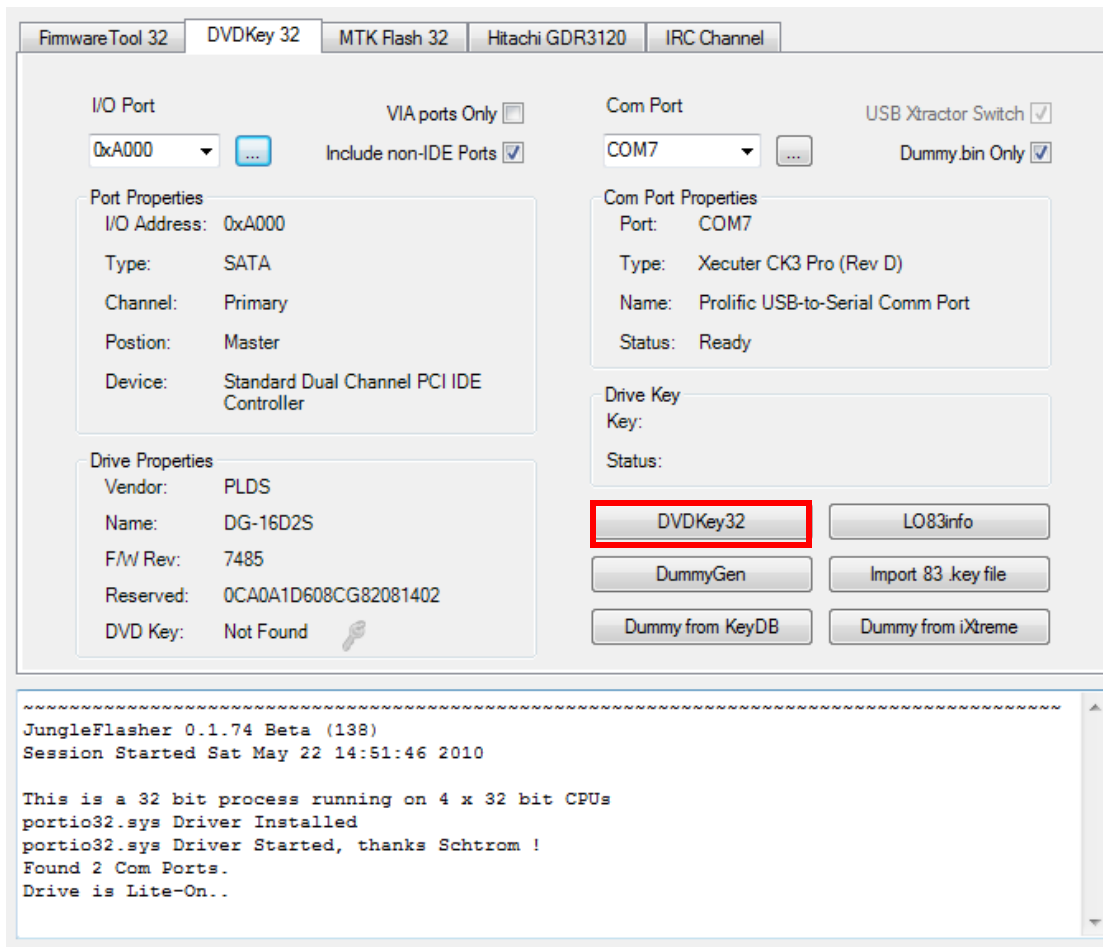


Providing serial connection was good, **DVDKey 32** will dump the key, then will test the key against the drive for 100% Verification that it is the correct key!

```
DVDkey delayed by 5 seconds
.....
Sending DVDKey request to I/O port 0xA000 and COM7
..... Serial Data looks ok, key returned: 9B749DEBF3935822C0950FB44B2D148B
Extracted drive key passed Verification !
```

Quickly followed by a lot of actual dumped information from drive,  
then prompt you to save **key.bin**, **inquiry.bin**, **identify.bin**, **serial.bin** (**unless you have selected dummy.bin only box**) and **dummy.bin**.

Of course, should you have enabled the 'Dummy.bin Only' option you will only be prompted to save **Dummy.bin**.

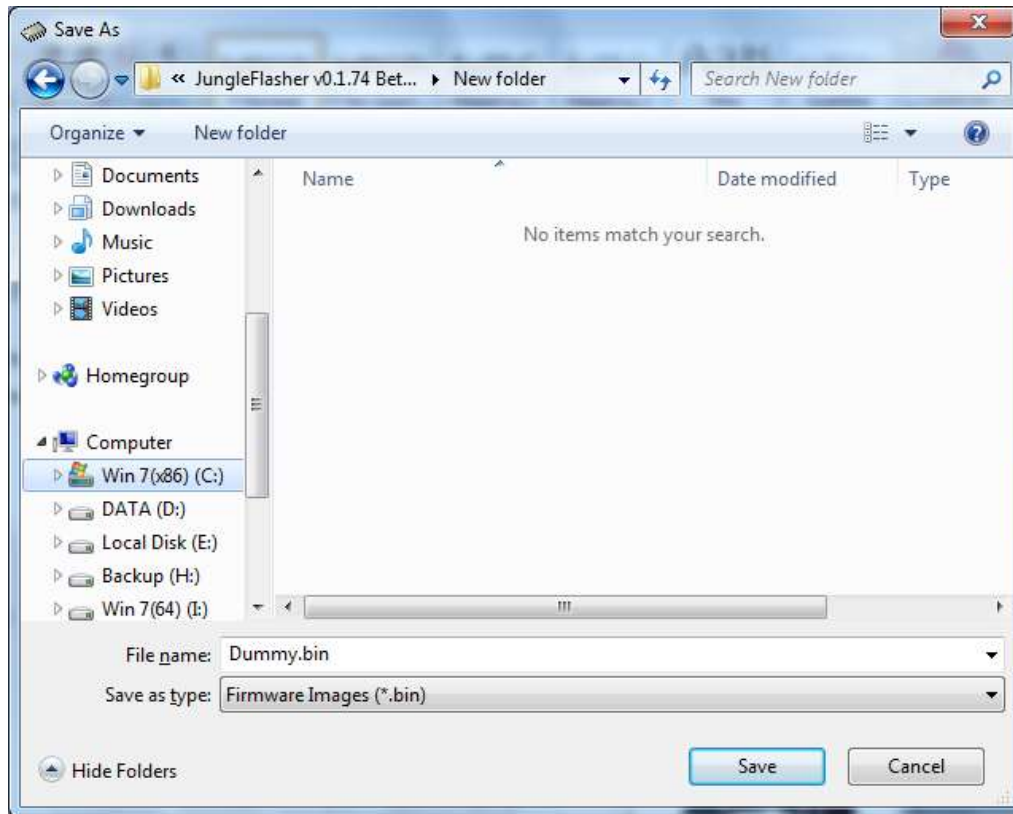

There is now **No Requirement** to dump the key multiple times!  
Nor is there a requirement to test it in a spare drive!


The key is dumped then Verified against the drive itself! Using c4eva's extremely clever verification routine, Jungleflasher tests the key against the drive (much like the xbox itself does!)

There is a **1 in  $3.4025 \times 10^{38}$**  chance of guessing the right key – so the fact it verifies means it's correct! 😊



## Firmware Manipulation

JungleFlasher will then prompt you asking if you would like to auto-load iXtreme for Lite-On Drives. You must have installed the **JungleFlasher Firmware Pack** into the same directory as JungleFlasher.exe if you wish to benefit from this feature.

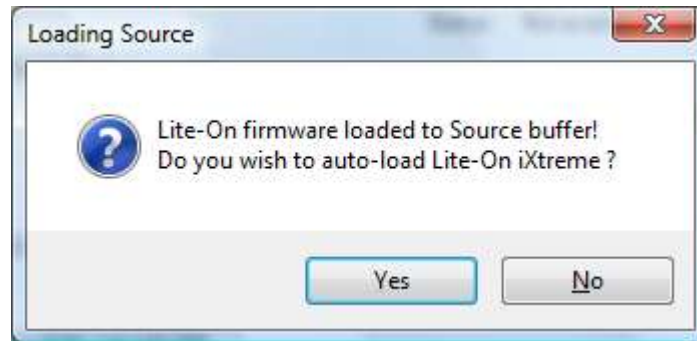


Click **Yes** to auto load iXtreme (from the firmware pack) for Lite-On into the **Target Buffer**, JungleFlasher will also load your previously dumped **Dummy.bin** as **Source Firmware**. Then, copy data from **source to target automatically**.

Just verify **Source data** reports as it should, **DVDKey 32 Extract with OSIG of PLDS DG-16D2S with the same key you dumped (check log for reference)**.

Now, verify **unique Source Data** matches that in **Target Buffer** and click save to file if you wish to backup your Hacked firmware.

**NOTE – IF (by some bizarre reason!) you load an 83850C V2 dummy into source then Jungleflasher will assume it to be 83850C V1 (as dummy is only “Usually” acquired from 83850C V1 – as opposed to a full OFW dump from a 83850C V2) – IF this happens – select “NO” to the autoload question and manually load and spoof the correct 83850C V2 firmware!**





Page 97 of 180

Things not going as expected? – Read the [FAQ's](#)

**The Next step is to ERASE the drive, its vitally important you only do this once you KNOW you are ready and have read the tutorial, in full, to understand the risks.**

# **IMPORTANT!!!!!!**

**Sending the erase command to the Lite-On using VIA Card with drivers installed poses the potential risk of the system locking up due to the VIA chipset polling the erased Lite-On and not liking the response!!!!!!**

**Please [CLICK HERE](#) and follow instructions to remove Card Drivers if you have not done so already.**

**NOTE- You CANNOT SPOOF a LiteOn Drive with LT  
Firmware as a DIFFERENT DRIVE**

## Erasing a Lite-On PLDS DG-16D2S.

**PLEASE READ THE WARNINGS ABOVE.**

**Once you erase the drive, there is NO GOING BACK.**

Click the **MTKFlash 32** Tab.




Verify I/O Port is correct(for your setup!) and click **Lite-On Erase**.




JungleFlasher will warn of the importance of having a verified **Good Drive Key**.

**Please Note, the only ways to know 100% that a key is good, is to ensure your drive key was verified by JF or flash your firmware to a identical drive first and test it in the xbox itself**

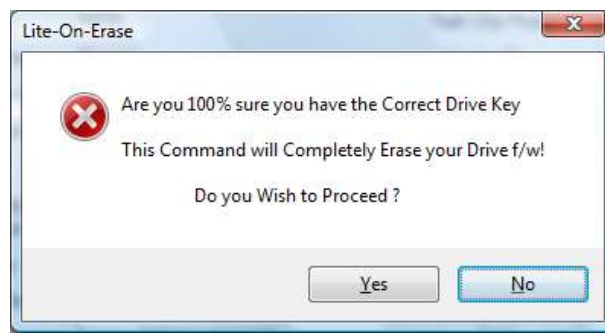


Click **Yes** if you wish to Proceed.

JungleFlasher will present you with another warning.

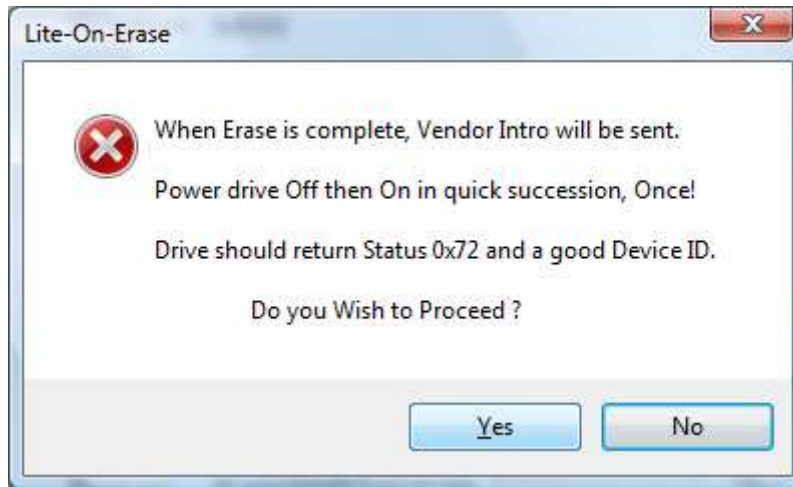

Read this carefully, in most cases JungleFlasher will return a Running Log similar to this: We have had 0xD0 / 0x80 / 0xF2 / 0xD1 and all worked fine.


After pressing yes and **during the sequence of dots** shown below, switch drive Power Off then On - **ONCE**.

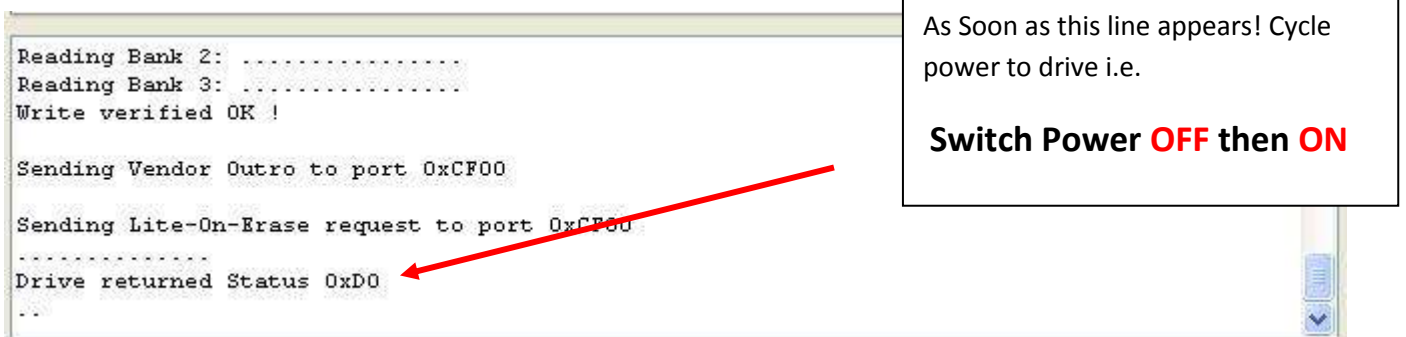

Hopefully you will see good **Flash Chip Properties** and **Status 0x72** (2 known SPi Chips for Lite-On's, Winbond **and** MXIC) MXIC Shown, drive will appear in **Vendor Mode** under **Drive Properties**.

**DON'T PANIC IF IT DOESN'T ENTER VENDOR MODE FIRST TIME OR IF YOUR DRIVE IS NOW NOT SHOWING UP AND WILL NO LONGER EJECT**

**– SIMPLY PRESS INTRO AND CYCLE DRIVE POWER – IF STILL NOT IN VENDOR MODE, TRY ERASING AGAIN!**

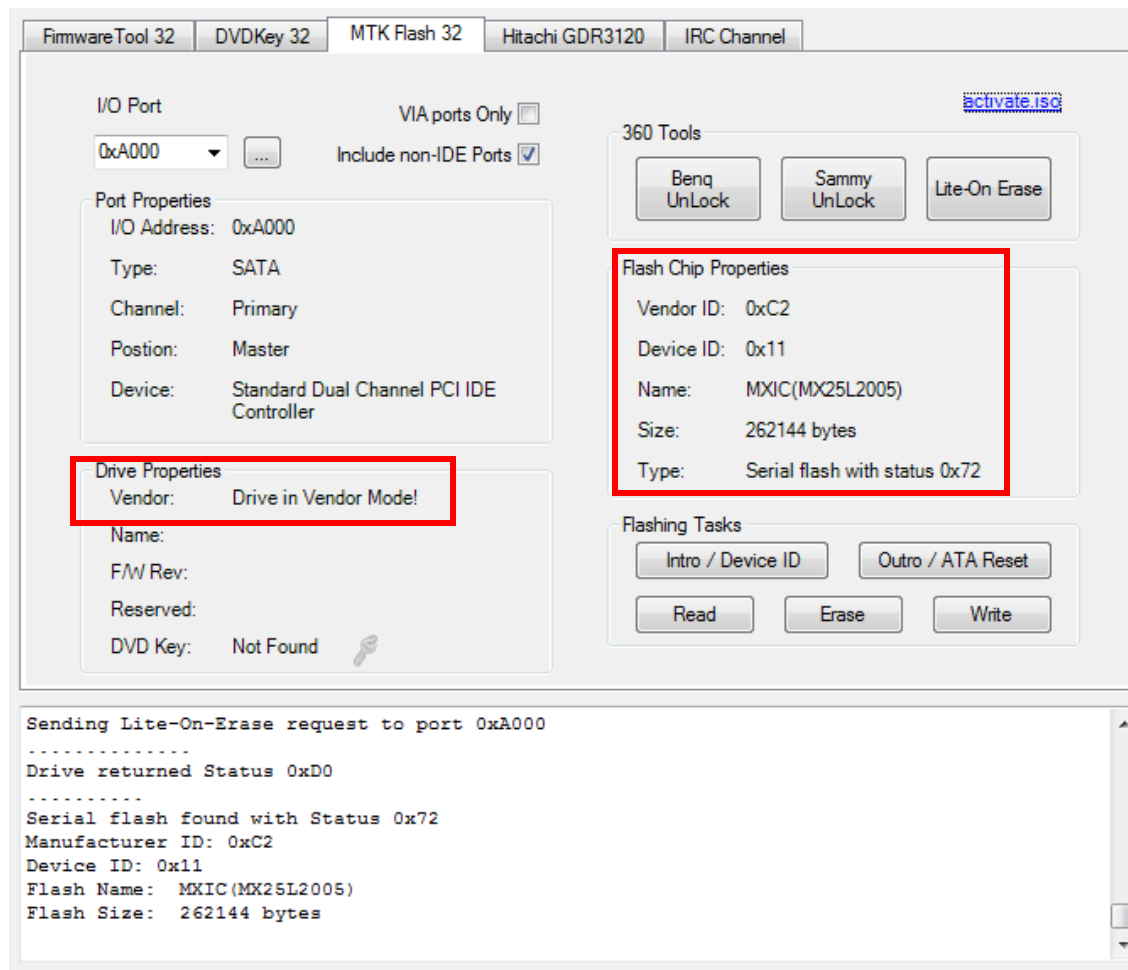

Drive is now in Vendor Mode (0x72).

Click the **Write** button to write **Target Buffer** to the drive.



```

Sending Chip Erase to Port 0xA000
Erasing:.....
Writing target buffer to flash
Writing Bank 0: .....
Writing Bank 1: .....
Writing Bank 2: .....
Writing Bank 3: .....

```

```
Flash Verification Test !
Reading Bank 0: .....
Reading Bank 1: .....
Reading Bank 2: .....
Reading Bank 3: .....
Write verified OK !
```

**Write Verified OK!** in **Running Log** signals good write.

Now send an Outro to the drive.

Done by pressing the **Outro / ATA Reset** Button

The screenshot shows the Hitachi GDR3120 software interface. At the top, there are tabs for 'FirmwareTool 32', 'DVDKey 32', 'MTK Flash 32', 'Hitachi GDR3120', and 'IRC Channel'. The 'Hitachi GDR3120' tab is active. On the left, a 'Drive Properties' box is highlighted with a red border, showing: Vendor: PLDS, Name: DG-16D2S, F/W Rev: 8385, Reserved: 0CA0A2D609CG92191300. Below this, another 'Drive Properties' box is also highlighted with a red border, showing: Vendor: PLDS, Name: DG-16D2S, F/W Rev: 7485, Reserved: 0CA0A1D608CG82081402, DVD Key: Verified. To the right of these boxes, there are checkboxes for 'VIA ports Only' and 'Include non-IDE Ports'. Further right, there are buttons for 'Benq UnLock', 'Sammy UnLock', and 'Lite-On Erase'. Below these, there is a 'Flash Chip Properties' section with fields for Vendor ID, Device ID, Name, Size, and Type. At the bottom right, there is a 'Flashing Tasks' section with buttons for 'Intro / Device ID', 'Outro / ATA Reset' (highlighted with a red border), 'Read', 'Erase', and 'Write'. At the bottom of the window, there is a 'Running Log' area showing the following text: 'Reading Bank 0: .....', 'Reading Bank 1: .....', 'Reading Bank 2: .....', 'Reading Bank 3: .....', 'Write verified OK !', 'Sending Vendor Outro to port 0xA000', 'Sending Vendor Outro to port 0xA000', and 'Drive is Lite-On..'. A tooltip is visible over the log area, stating: 'Drive Barcode found in KeyDB (50 - New folder)', 'Barcode is: D608CG820814020F1', and 'Key is: 9B749DEBF3935822C0950FB44B2D148B'.

Drive Properties  
Vendor: PLDS  
Name: DG-16D2S  
F/W Rev: 8385  
Reserved: 0CA0A2D609CG92191300

Different properties when flashing an 83850C, for example

Drive Properties  
Vendor: PLDS  
Name: DG-16D2S  
F/W Rev: 7485  
Reserved: 0CA0A1D608CG82081402  
DVD Key: Verified

Drive Barcode found in KeyDB (50 - New folder)  
Barcode is: D608CG820814020F1  
Key is: 9B749DEBF3935822C0950FB44B2D148B

Running Log  
Reading Bank 0: .....  
Reading Bank 1: .....  
Reading Bank 2: .....  
Reading Bank 3: .....  
Write verified OK !  
Sending Vendor Outro to port 0xA000  
Sending Vendor Outro to port 0xA000  
Drive is Lite-On..

This will release a drive from **Vendor Mode** and send **ATA Reset** to the Drive. It then sends an inquiry command to the drive.

This will save you power cycling the drive and then changing port away and change it back again, with the click of a button, the drive will 'reset' itself and JungleFlasher will send an inquiry command to the drive. If successfully flashed the drive should Inquire correctly and display drive properties.

Power Off – Disconnect SATA from PC, connect SATA back to console and test!

**ADDITIONAL INFO – IF YOU HAVE BEEN FOLLOWING MRA HACK PROCEDURE TO DUMP ORIGINAL LITEON FIRMWARE - REMEMBER YOU MUST REMOVE YOUR ADDED WIRING AND RECONNECT ANY CUT TRACES! BEFORE TESTING**

**[COMPLETE – CLICK HERE TO RETURN TO START OF TUTORIAL](#)**

## LiteOn “83850c v1” Extraction

How to obtain the unique data from your PLDS DG-16D2S **83850c v1** drive and create a Dummy.bin.

**The 83850C v1 Firmware drives DO NOT require the additional Hardware that the 74850C Firmware drives do –**

**83850C v1 drive’s information is extracted through SATA!**

### Obtaining Dummy.bin

Please Note: Dummy.bin is **not** Original firmware, it is [FAKE] firmware based on the structure of an Original firmware file, and this makes everything easier to work with.

Connect your 83850c to your PC via S-ATA

Power on and run JungleFlasher v0.1.69b or above



(example only)



## Select DVDKey32 Tab

The screenshot shows the DVDKey32 tab in the JungleFlasher application. The interface is divided into several sections for configuring hardware and software settings.

**Top Tabs:** FirmwareTool 32, **DVDKey 32**, MTK Flash 32, Hitachi GDR3120, IRC Channel

**I/O Port Section:**

- I/O Port: 0xE800 (dropdown menu)
- VIA ports Only: ☐
- Include non-IDE Ports: ☒

**Port Properties:**

- I/O Address: 0xE800
- Type: SATA
- Channel: Primary
- Position: Master
- Device: VIA VT6421 RAID Controller

**Drive Properties:**

- Vendor: PLDS
- Name: DG-16D2S
- F/W Rev: 8385
- Reserved: 0CA0A2D609CG92180800
- DVD Key: Not Found (with a key icon)

**Com Port Section:**

- Com Port: COM7 (dropdown menu)
- USB Xtractor Switch: ☒
- Dummy.bin Only: ☒

**Com Port Properties:**

- Port: COM7
- Type: Xecuter CK3 Pro (Rev D)
- Name: Prolific USB-to-Serial Comm Port
- Status: Ready

**Drive Key Section:**

- Key: (empty field)
- Status: (empty field)

**Action Buttons:**

- DVDKey32
- LO83info
- DummyGen
- Import 83 .key file
- Dummy from KeyDB
- Dummy from iXtreme


**Log Window (Bottom):**

```
~~~~~
JungleFlasher 0.1.74 Beta (138)
Session Started Sat May 22 15:23:08 2010


This is a 32 bit process running on 4 x 32 bit CPUs
portio32.sys Driver Installed
portio32.sys Driver Started, thanks Schtrom !
Found 1 Com Ports.
Drive is Lite-On..
```

Check to see the 83850c Inquires on the port.

## Select **LO83info**

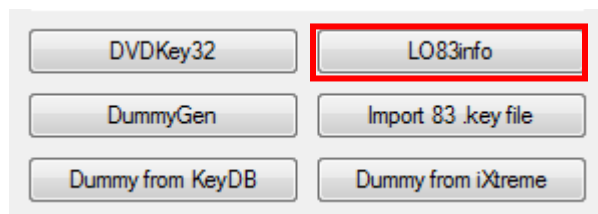


If you see this message:

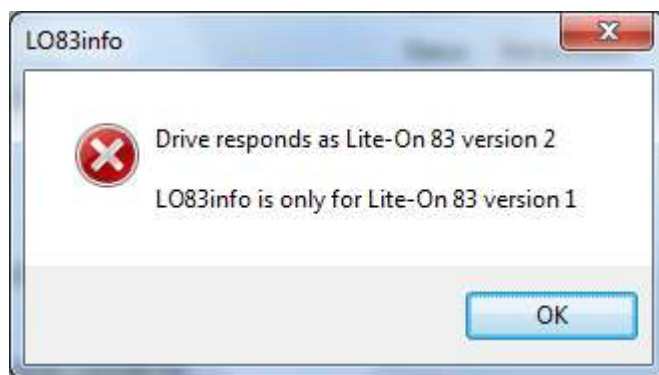

You have a **83850C v2** so [CLICK HERE TO PROCEED](#)

**IF NOT** then you have the **83850C v1** and should see THIS!

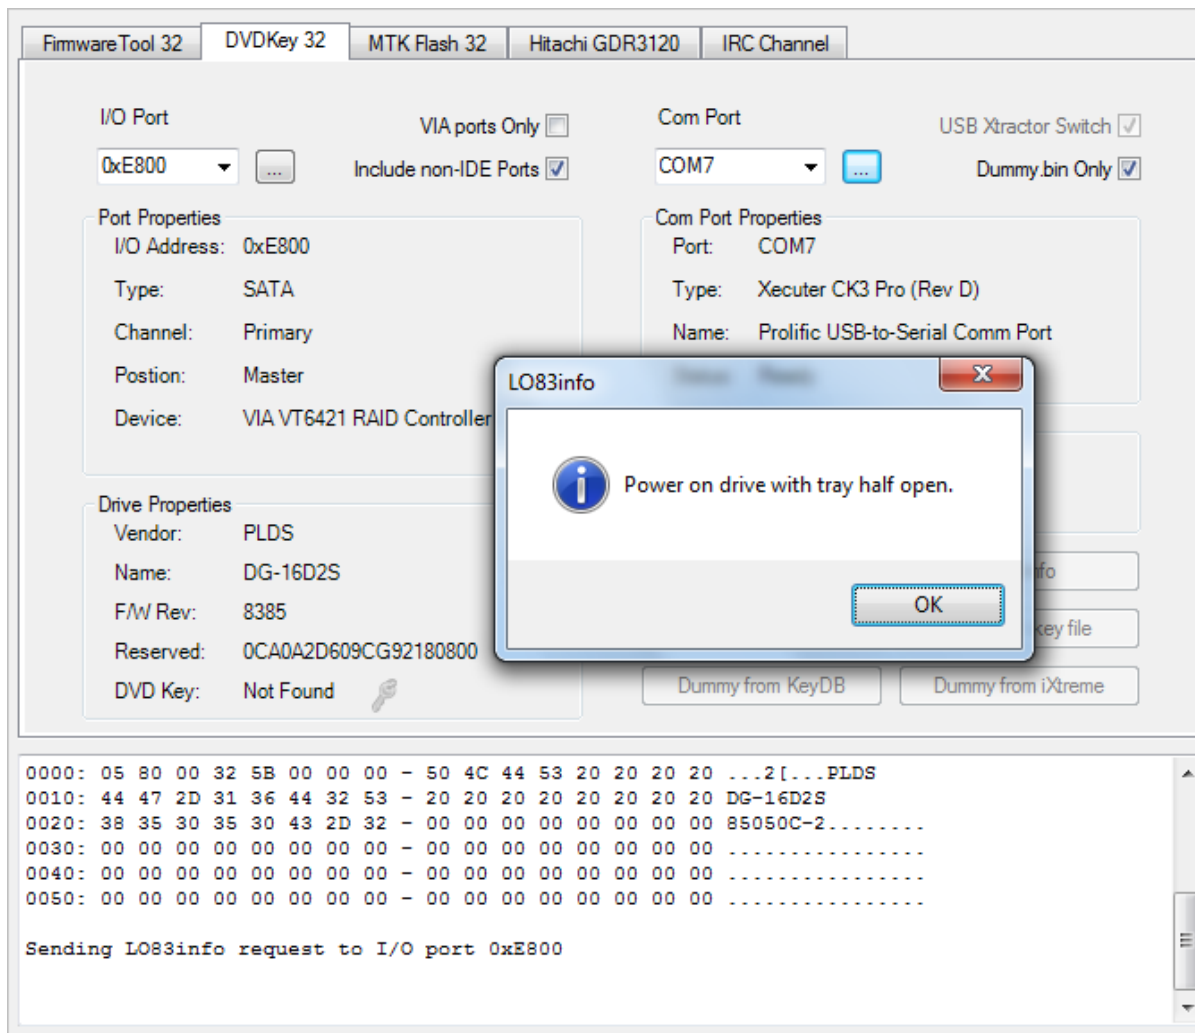


Here you must set the tray to '**Half Open (but half closed status)**',

**[FOR INSTRUCTIONS ON HALF OPEN TRAY – CLICK HERE](#)**

Please ensure you have the drive **fresh / power cycled after setting Half Open Tray, this is essential**. Then, click **OK**

JungleFlasher will then send the LO83info command to the drive; you will see the following in the **Running Log**

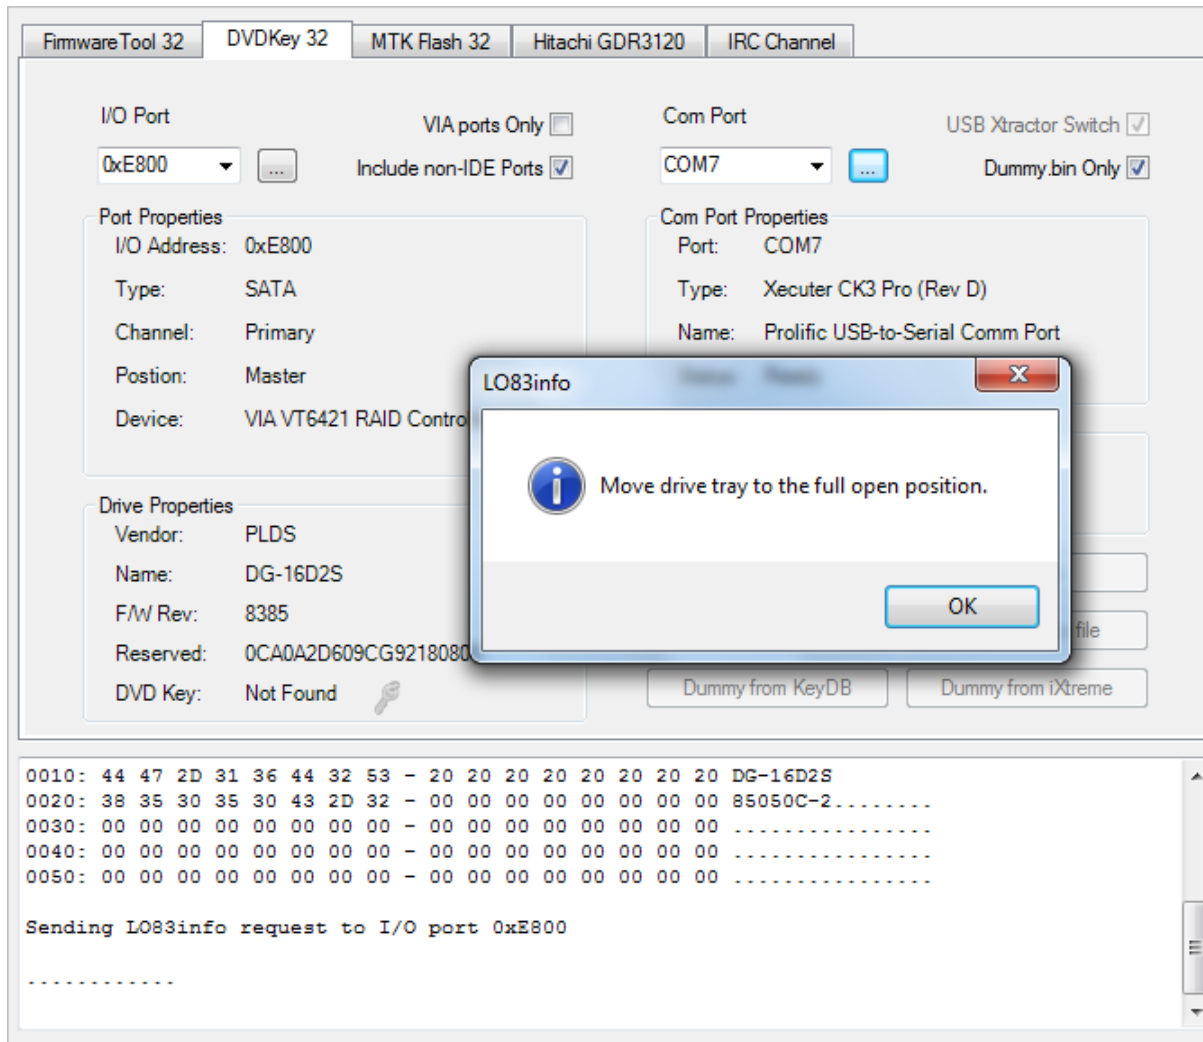

**DO NOT POWER CYCLE THE DRIVE AT THIS STAGE; DOING SO WILL  
RESULT IN A BAD/FAILED DUMP!!!!**


Eject the drive (so it is fully open) OR manually move the tray fully open by hand!

Once tray is fully ejected, click **OK**

If the dump appears to JungleFlasher that it was valid, JungleFlasher will prompt you to save, but look for this in the log: (with Your key!)

```
Extracted drive key 9B749DEBF3935822C0950FB44B2D148B
Extracted drive key Passed Verification !
```


Jungleflasher will now prompt you to save!



**Save this file.**

Note: I only save dummy.bin as I have dummy.bin only enabled in the DVDKey32 Tab, JungleFlasher  
\*may\* prompt you to save Inquiry.bin, Identify.bin, Serial.bin and Key.bin also, if this isn't enabled.

Once saved, JungleFlasher will load Dummy.bin as Source Firmware in FirmwareTool32 and prompt you to auto load iXtreme (from the firmware pack)

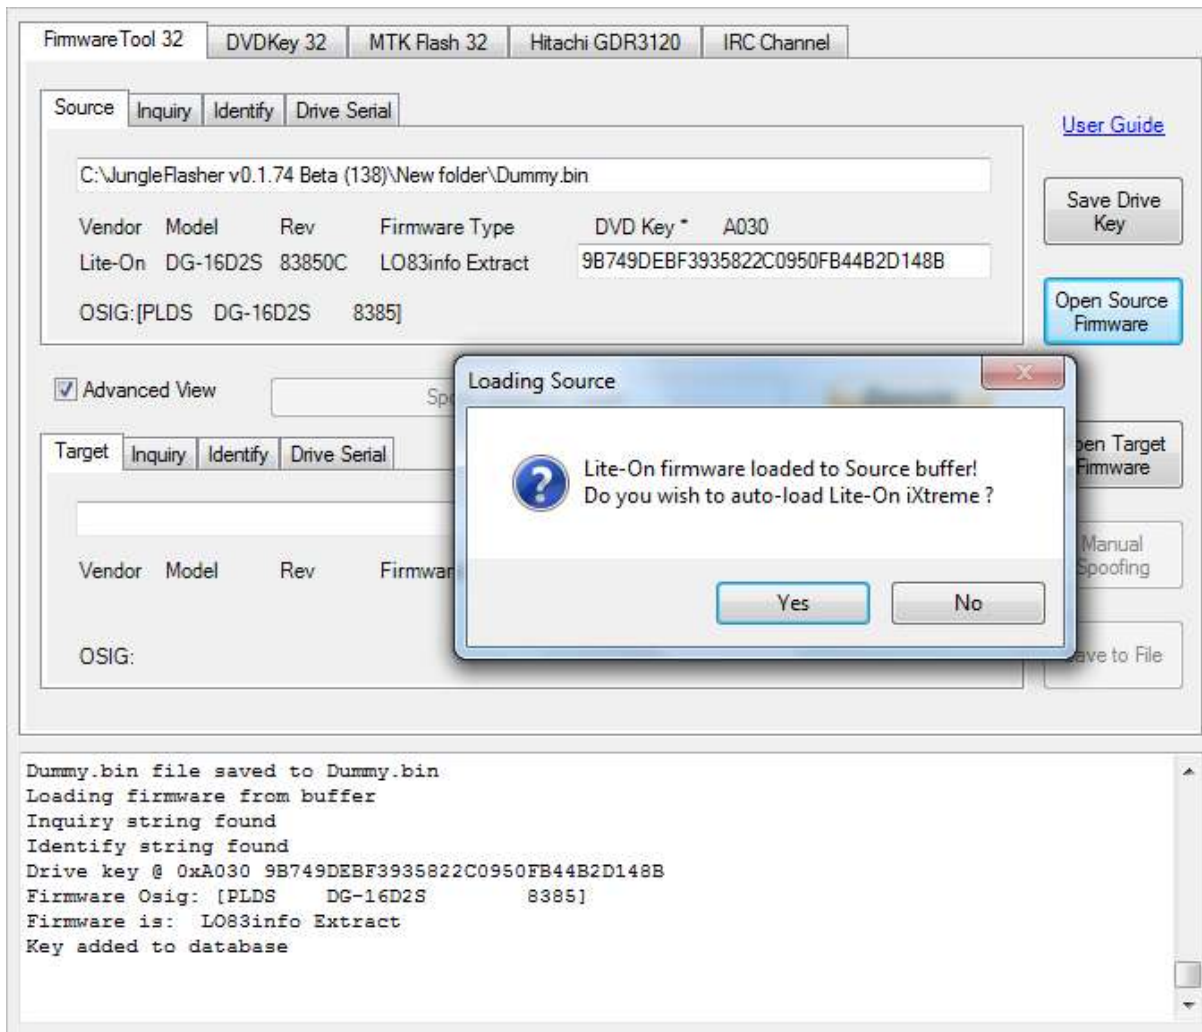

Check the keys match and the OSIG/model info is the same!



Page 110 of 180

**Things not going as expected? – Read the [FAQ's](#)**

## Dumping OFW from LiteOn for 83850C v2 & 93450C

( & All LiteOn flashed with iXtreme LT firmware unless you previously dumped this drive and have the details in the Key database)

When this hack was first released there was several differing methods appeared varying mainly in where to connect certain wires and which traces to cut. After testing several of them we have listed the popular methods, the **original MRA Hack, The Xecuter Probe II, The Xecuter LT Switch , Vampire & Rebuild Board, Vampire w/o Rebuild Board**

NOTE: With the release of Jungleflasher 1.70 a section of data is now copied over starting from hex address 3C000 this data has been talked about as “calibration data” At the time of writing this, it’s thought to contain data from manufacture tests but is not used! However for completeness is now copied over to your iXtreme firmware. This is shown in the running log at time of spoofing the firmware like:

```
Spoofing Target
DVD Key copied to target
Inquiry string copied to Target
Identify string copied to Target
Serial data copied from Source to Target
Calibration data copied from Source to Target
```


A full dump of your **VIRGIN drive** (not one that has been returned with other stock firmware) is the **ONLY WAY** to get the **ORIGINAL DATA** from your drive into the iXtreme LT firmware. So IF your drive has been flashed before please IGNORE

the statement that appears `No Calibration data in source` as it is NOT important and there is NOTHING you can do – it has been lost forever!

**All the methods involve cutting traces on the PCB! Please read on for some handy information regarding this topic!**

*For your information:*

## Trace cuts!

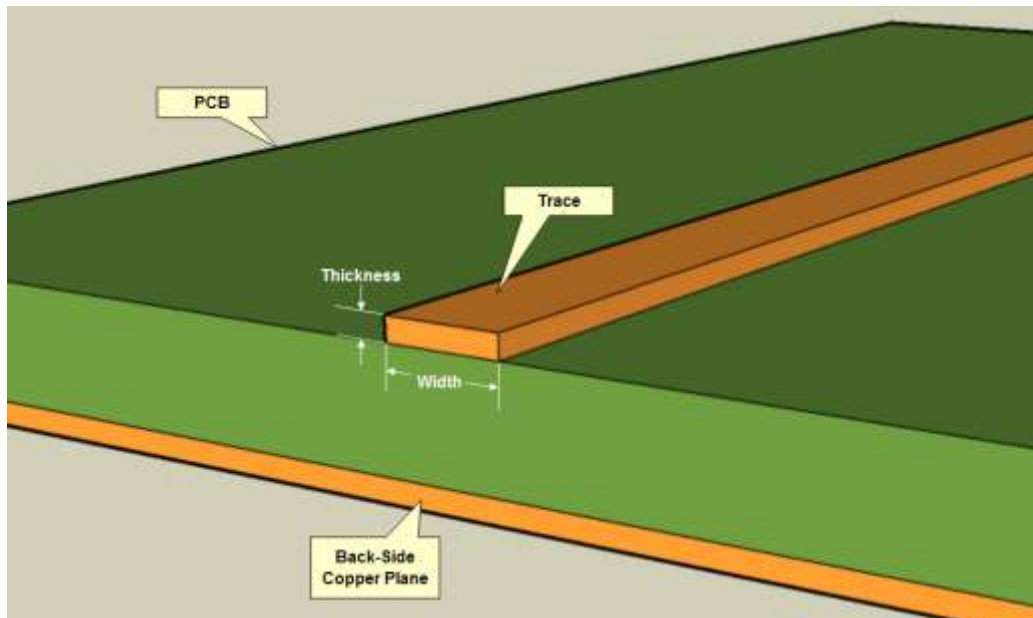

**Cutting traces on the PCB:** The traces that requires cutting on the PCB are only a thin strip of copper laid on top of the PCB! They do NOT need carving up with a chainsaw! A reasonable pressure with a sharp craft knife is sufficient to cut through them. Easily less than .5mm thick!

**Moral of the story:** You don't have to cut right through half the PCB to cut the trace!

Click on the link for the method of your choice!

[The MRA Hack](#)

[Xecuter Probe II](#) , [Xecuter LT Switch](#)

[Vampire With Board](#) , [Vampire w/o Board](#)




## The MRA Hack

**Can be used on ALL current LiteOn Drives**


***Soldering/Electronics skills are required for these modifications – It Should NOT be attempted by people without such skills!***

Basic wiring guide for the drives PCB

A 18 - 22 Ohm resistor is required and a switch such as dpdt (double pole, double throw) -using one side only

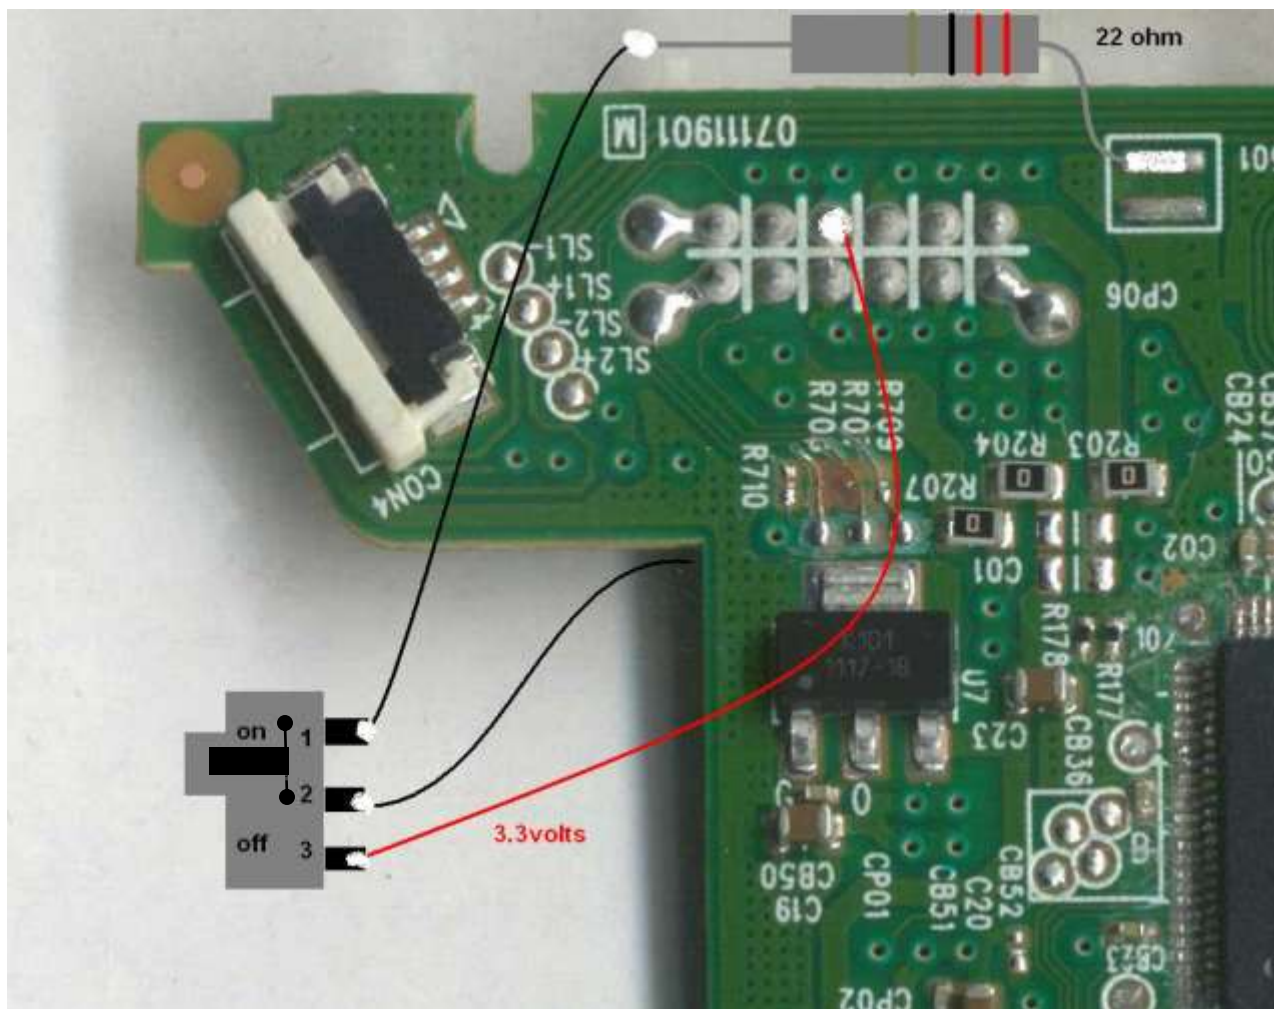

Pic 1

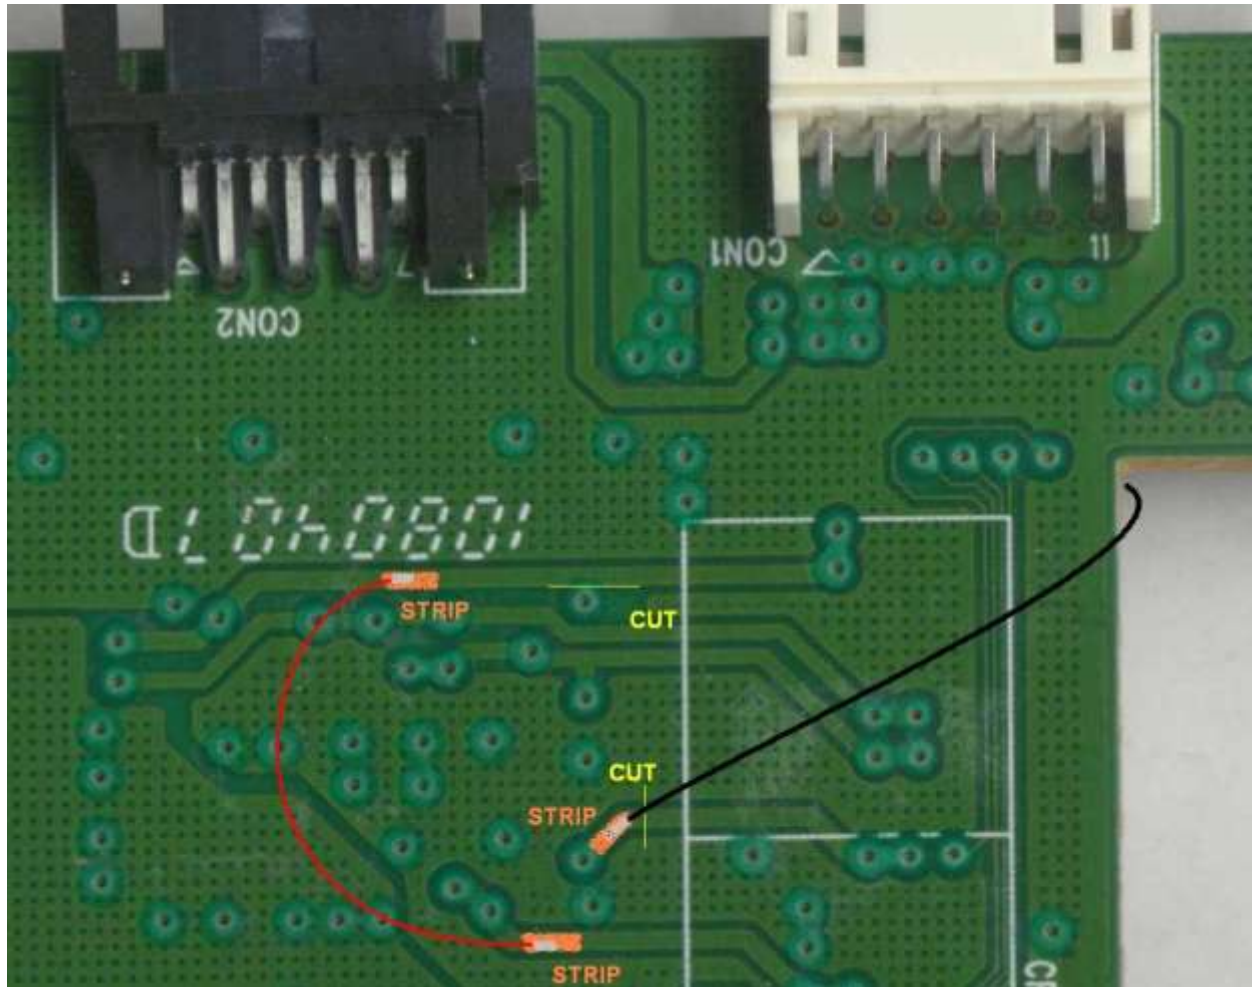


Pic 2

The 2 trace locations in yellow must be cut!

With Jungleflasher running, have the switch so it connects 3.3v line to the middle cable showing in picture 1 (switch selected OFF).

Connect drive to PC's SATA and power drive, select **MTK Flash 32** tab

Refresh, drive properties – so drive shows up

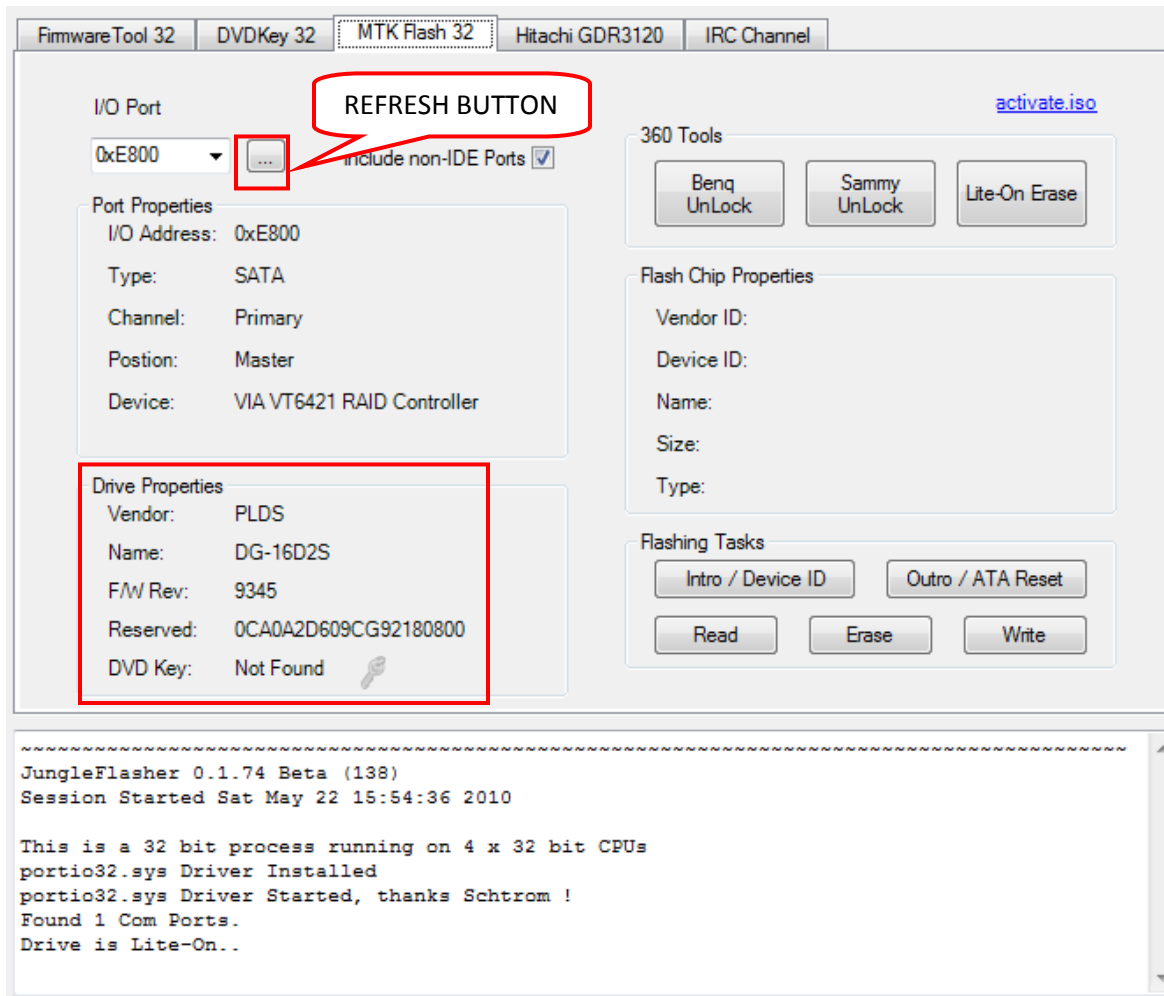


Turn power off to the drive

Operate switch you added! To connect to the 22 ohm resistor side (On)

Press **intro/ Device ID button**




The following will appear! Press **Yes** button

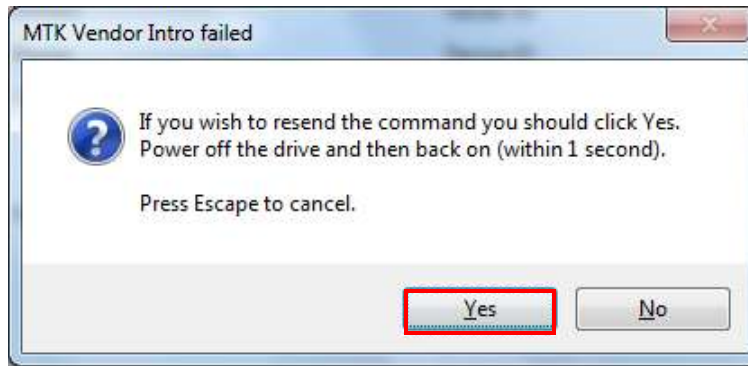

Then power on the drive!

**IF** this produces a screen showing **BAD FLASH PROPERTIES** (shown below)

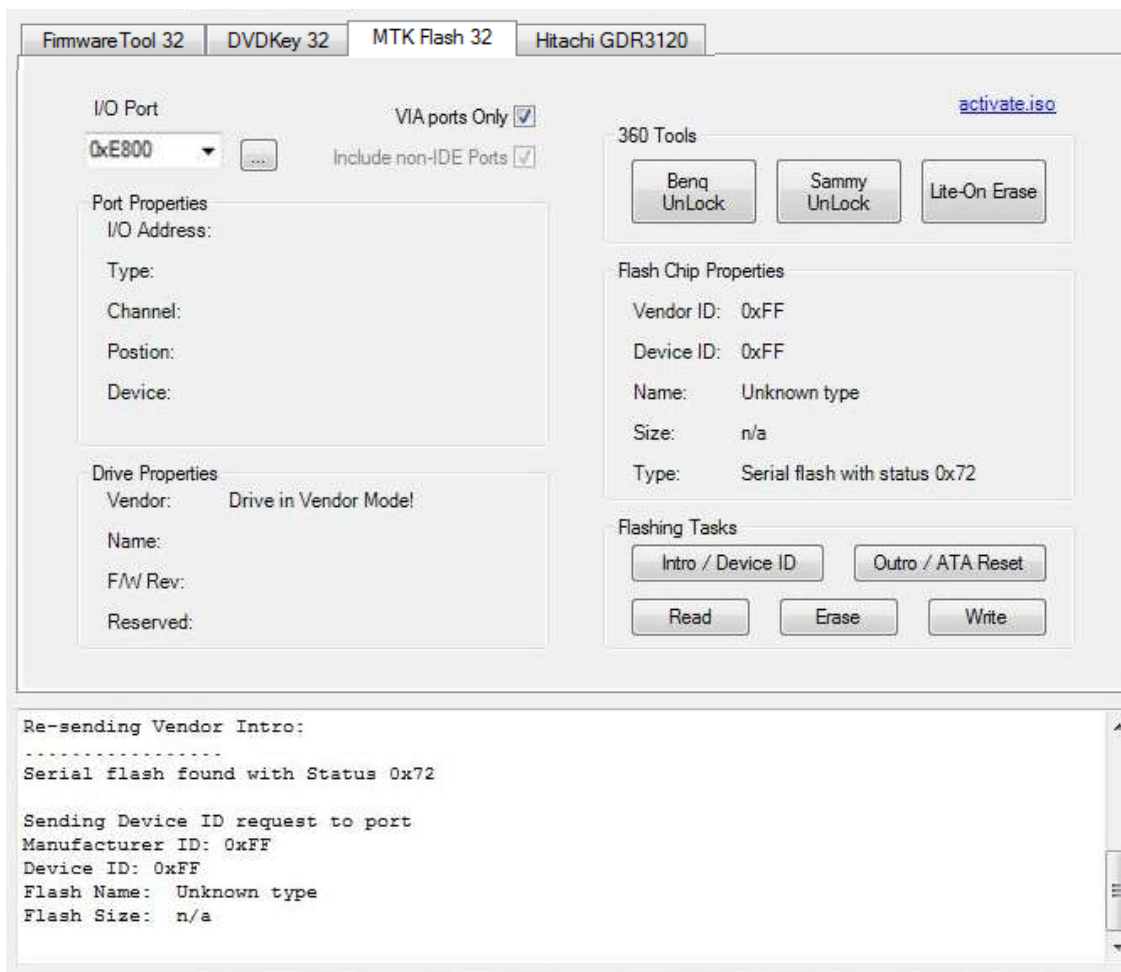


then press **Intro/Device ID** button again –

## DO NOT POWER CYCLE!



If everything has been done correctly – you should be faced with this!

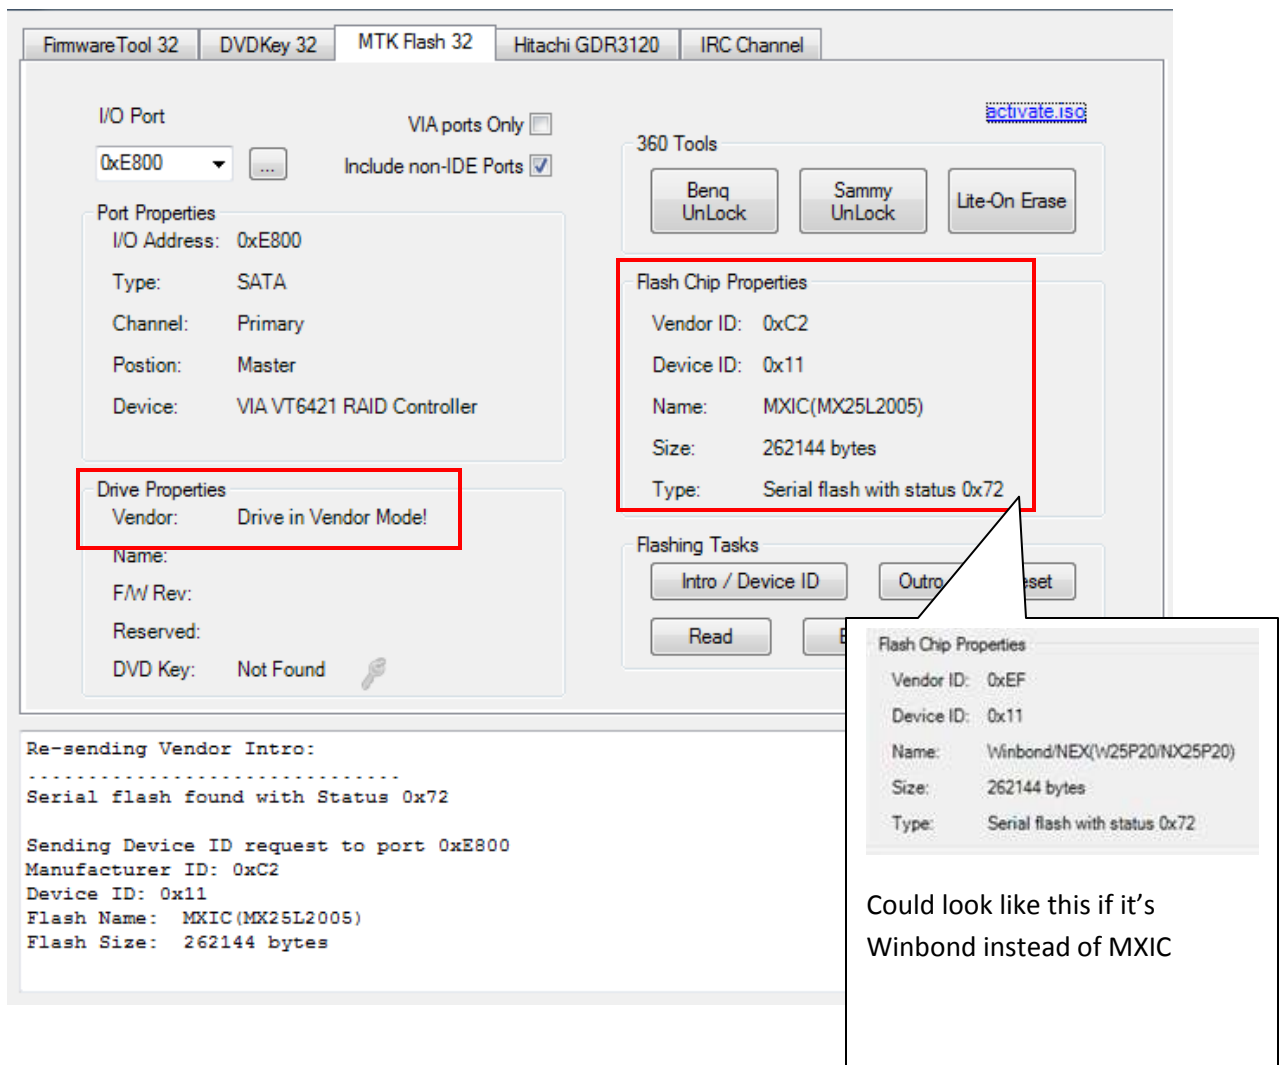

After you get these good flash properties, quickly operate the added switch again to 3v3 side (Off in pic 1)

Now press the **Read** button






Jungleflasher will now dump your Original LiteOn Firmware,

When prompted to SAVE – **it is advised you do so!**

**IF you get “parse failed” read [THIS](#)**

The dumped firmware will now automatically be loaded into source in **firmwaretool 32** tab.

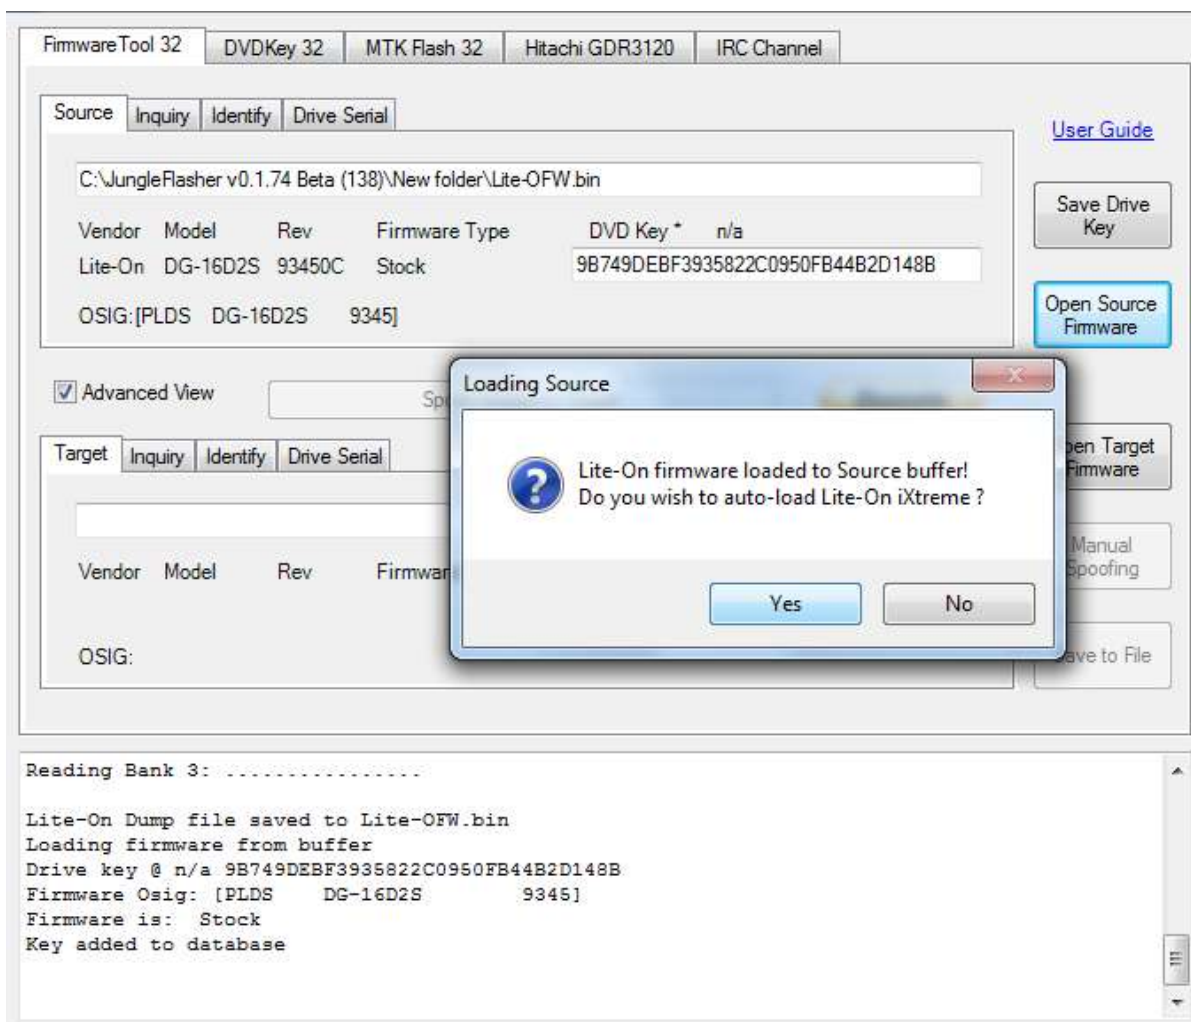

## Select Yes

FirmwareTool 32   DVDKey 32   MTK Flash 32   Hitachi GDR3120   IRC Channel

Source   Inquiry   Identify   Drive Serial

[User Guide](#)

C:\JungleFlasher v0.1.74 Beta (138)\New folder\Lite-OFW.bin

Vendor	Model	Rev	Firmware Type	DVD Key *	n/a
Lite-On	DG-16D2S	93450C	Stock	9B749DEBF3935822C0950FB44B2D148B	
OSIG:[PLDS DG-16D2S 9345]					

☒ Advanced View   Spoof Source to Target   [Donate](#)

Target   Inquiry   Identify   Drive Serial

C:\JungleFlasher v0.1.74 Beta (138)\firmware\ix-ltv1.1-934.bin

Vendor	Model	Rev	Firmware Type	DVD Key @	n/a
Lite-On	DG-16D2S	93450C	iXtreme LT 1.1	9B749DEBF3935822C0950FB44B2D148B	
OSIG:[PLDS DG-16D2S 9345]					

[Save Drive Key](#)   [Open Source Firmware](#)   [Open Target Firmware](#)   [Manual Spoofing](#)   [Save to File](#)

Firmware is: iXtreme LT 1.1  
Spoofing Target  
DVD Key copied to target  
Target is LT - ID strings not copied to Target  
Serial data copied from Source to Target  
Calibration data copied from Source to Target

Loading MTK\_Flash source file

Now, Just follow the standard write procedure!

So return to **MTK** tab

[NOW CLICK HERE!](#)


## Dumping Firmware from a drive with a Xecuter LT Switch Fitted

For full fitting instructions go [here](#)

Essentially the board preparation is the similar to the MRA hack but once fitted need not be removed and has a switch on it to select between 'normal' operation and R/W (presumably meaning read/write) though technically all reading and writing is done with switch in 'normal' position, the R/W position is ONLY used to place the drive into vendor mode!, then switched back to normal for reading and writing operations.

NOTE: v1.5 has now been released! Added MULTI-R feature! Select 20ohms normally – if drive status fails to leave 0x51, try selecting 18ohms or 22ohms and try again.

### **NEW VERSION 1.5**

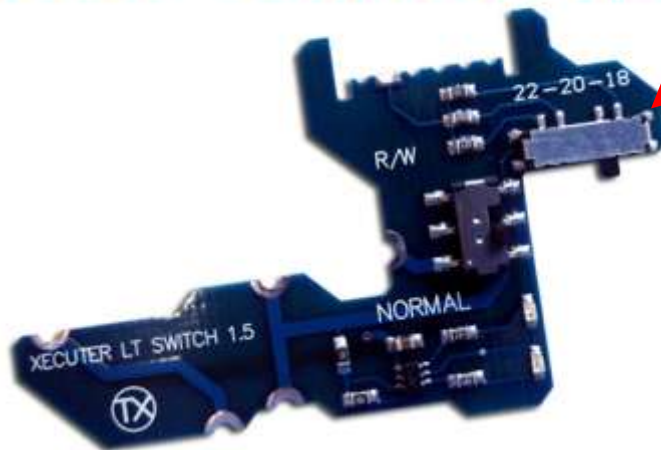


Once installed as per fitting instructions,

With switch in "Normal" position and MULTI-R set to 20 ohms

Connect drive to PC's SATA and power drive (GREEN LED will be LIT), select **MTK Flash32** tab

Refresh, drive properties – so drive shows up



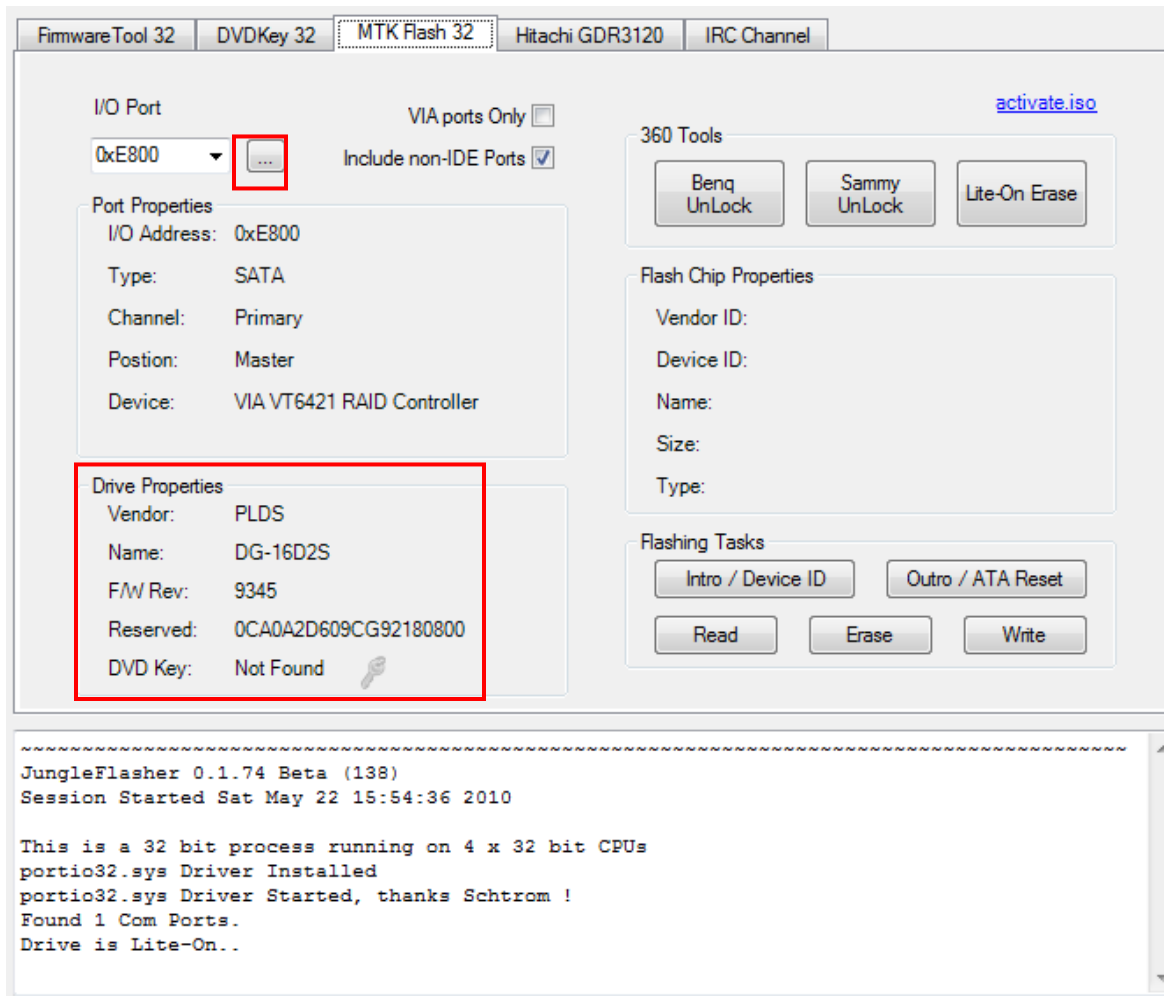


Turn power to the drive **off**.

Operate switch to the **R/W** position

Press **Intro/ Device ID** button




The following will appear! Press **Yes** button

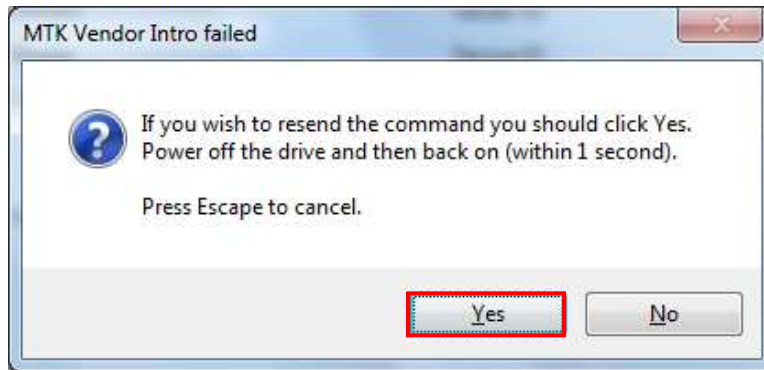

Then turn power to the drive ON again,  
(Note the LED will now be RED instead of GREEN)




**IF** your drive has a WINBOND chipset then this will produce a screen showing  
**further instructions** (shown below)

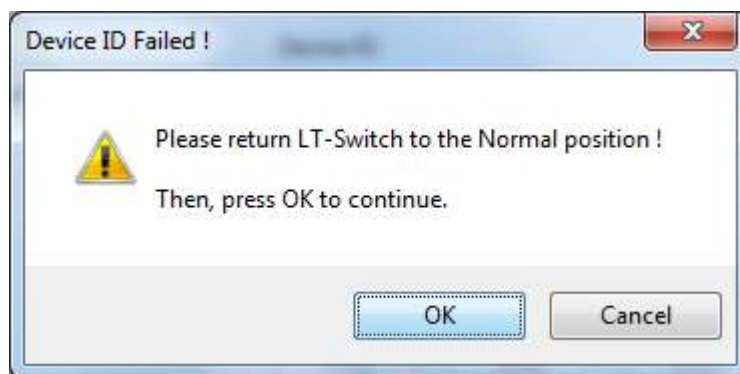

then put LT Switch back to **Normal** and press **OK**

If everything has been done correctly – you should be faced with this!

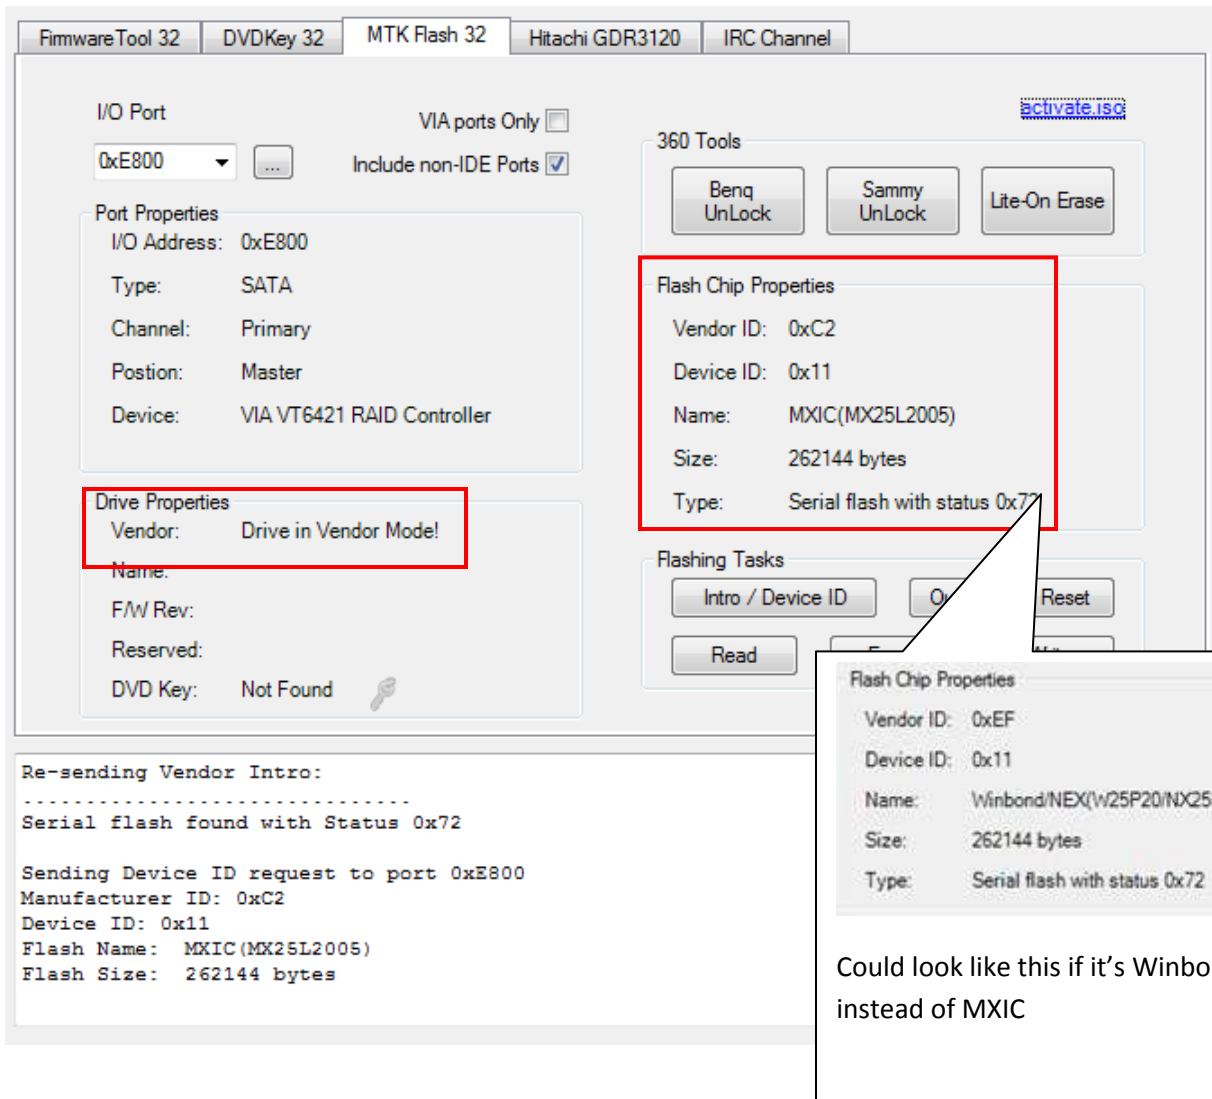

Once you have the Correct status (shown above),

If you have a MXIC chipset & haven't already done so – now quickly return the switch to the 'normal' position (GREEN LED illuminated)

Now press the **Read** button




Jungleslasher will now Dump your Original LiteOn Firmware,

**When prompted to SAVE it is advised you do so!**

**IF you get “parse failed” read [THIS](#)**

The dumped firmware will now automatically be loaded into source in **firmwaretool 32** tab.

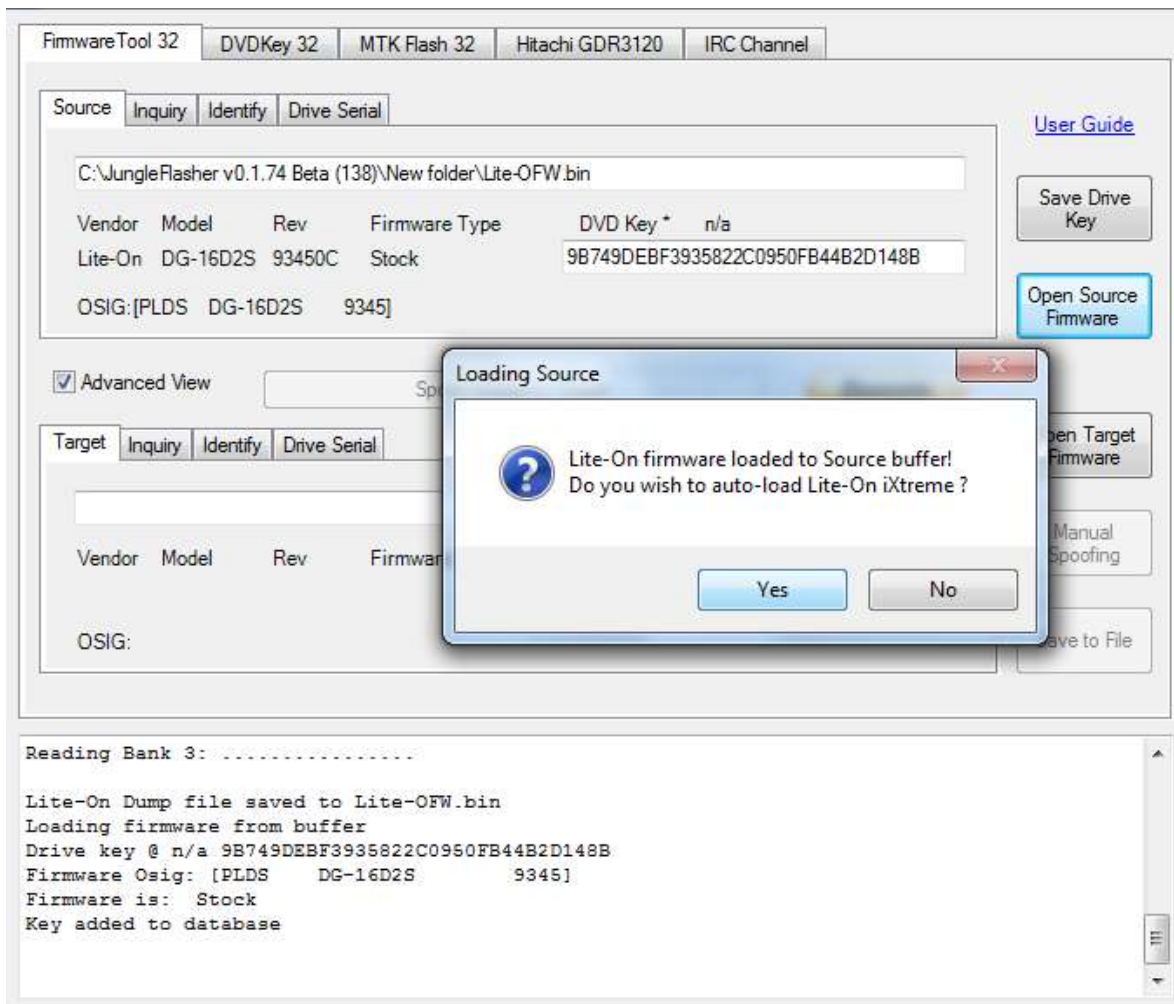

Select **Yes**

FirmwareTool 32
DVDKey 32
MTK Flash 32
Hitachi GDR3120
IRC Channel

Source
Inquiry
Identify
Drive Serial

Vendor	Model	Rev	Firmware Type	DVD Key *	n/a
Lite-On	DG-16D2S	93450C	Stock	9B749DEBF3935822C0950FB44B2D148B	
OSIG:[PLDS DG-16D2S 9345]					

[User Guide](#)

☒ Advanced View

Target
Inquiry
Identify
Drive Serial

Vendor	Model	Rev	Firmware Type	DVD Key @	n/a
Lite-On	DG-16D2S	93450C	iXtreme LT 1.1	9B749DEBF3935822C0950FB44B2D148B	
OSIG:[PLDS DG-16D2S 9345]					

```

Firmware is: iXtreme LT 1.1
Spoofing Target
DVD Key copied to target
Target is LT - ID strings not copied to Target
Serial data copied from Source to Target
Calibration data copied from Source to Target

Loading MTK_Flash source file

```

Just follow the standard write procedure!

So return to **MTK Flash 32** tab

[NOW CLICK HERE!](#)


## Xecuter Probe II Method

Connect the Xecuter probe II to the CK3 Pro.

Make sure the OP Switch is in the UP (ON) position and switch the mode to MRA.

Power on the CK3 pro you will see that the Xecuter probe II BLUE POWER LED is on and the MRA GREEN NORMAL LED is on (IF RED is LIT – op-switch is in WRONG position). This shows that everything is functioning.


Now turn the CK3 Pro power OFF.

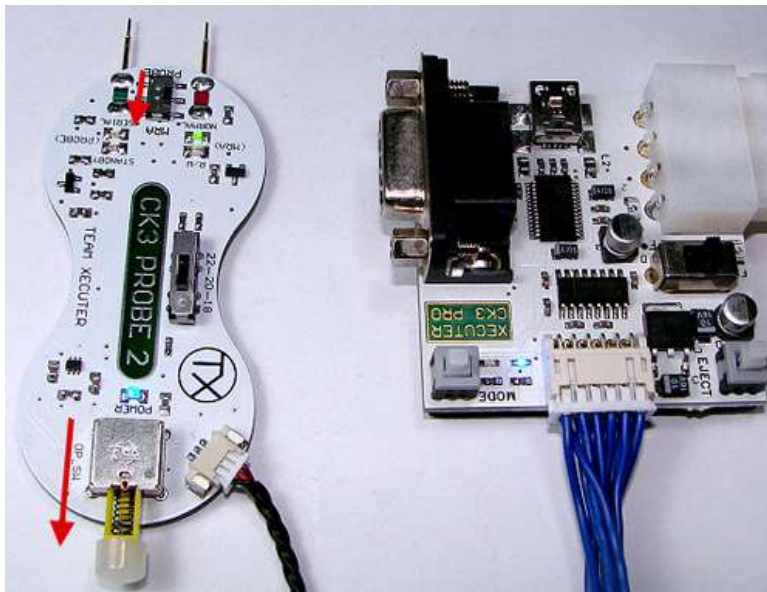

Use a *fiberglass scratch pen* and clean up the 2 holes to make the Probes contact better – Do this before cutting traces, as you are less likely to stress the pad 101 while it's still connected to trace

Cut traces on the PCB. The cuts are small and not difficult to do. Most people use a *Xacto knife* or a small dremel tool. Make 2 small cuts where the yellow lines are. . ***(Be very careful not to damage pad 101, once cut from the trace it becomes quite fragile)***



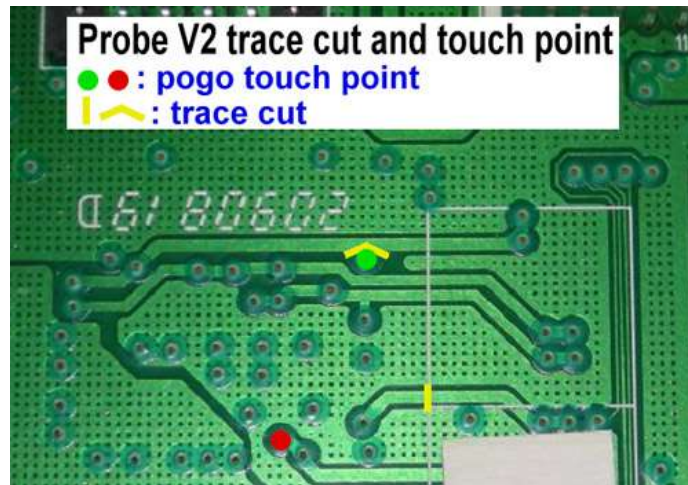


Now take the Xecuter Probe II and place the points onto the marked red and green positions. The Probe's pins are clearly marked. Remember at this stage the CK3 Pro power should be OFF.



Now turn the CK3 Pro power switch to on. You will now see the Xecuter Probe II BLUE POWER LED come on and also the MRA GREEN NORMAL LED come on.



Refresh the I/O port in Jungleslasher on MTK tab. You should see the DVD drive properties if everything is connected and setup correctly. This is also an indication that your SATA is setup correctly. You may need to select another I/O port then return to the correct I/O port for it to show properly.

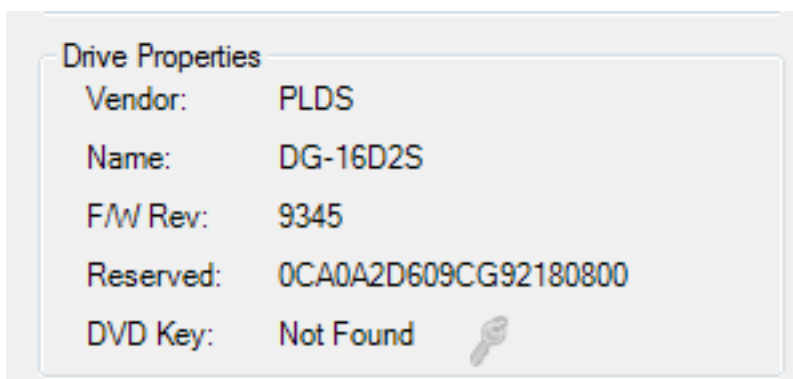


(ONLY EXAMPLE – You will see FW revision of YOUR drive)

Press the **Intro/Device ID** Button







Turn the power OFF on the CK3. Push the OP Switch on the Xecuter Probe II down

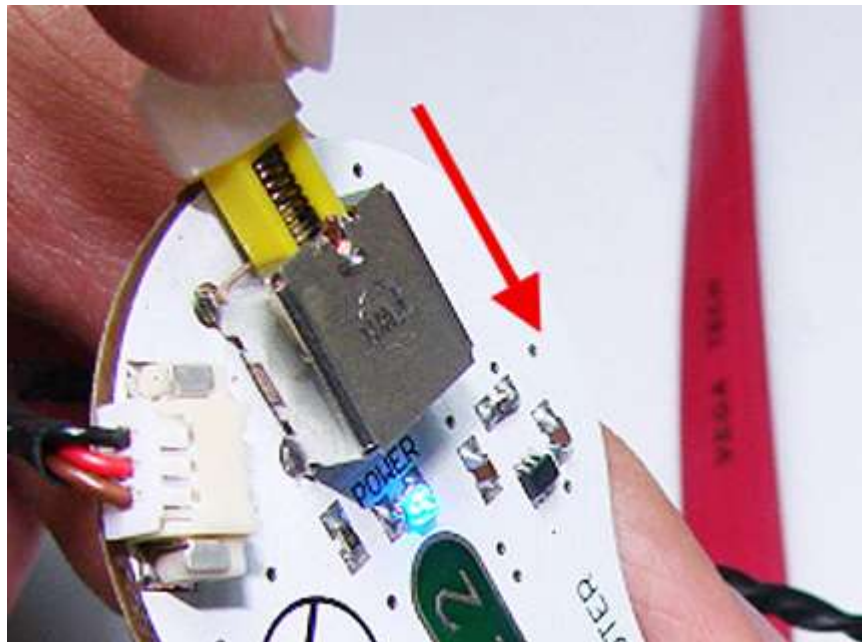


Press Yes! – Then power ON CK3,(RED LED – if it doesn't go on – don't worry – continue)

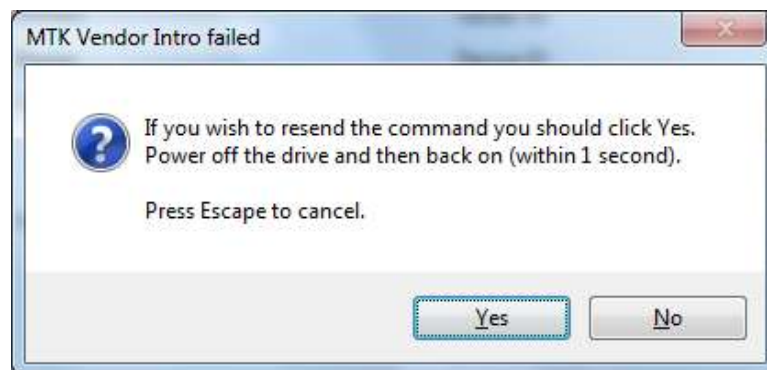

*(NOTE: If you have a Winbond IC you may see a warning to switch LT switch back to normal then press ok! Simply operate OP Switch to up position then click ok)*

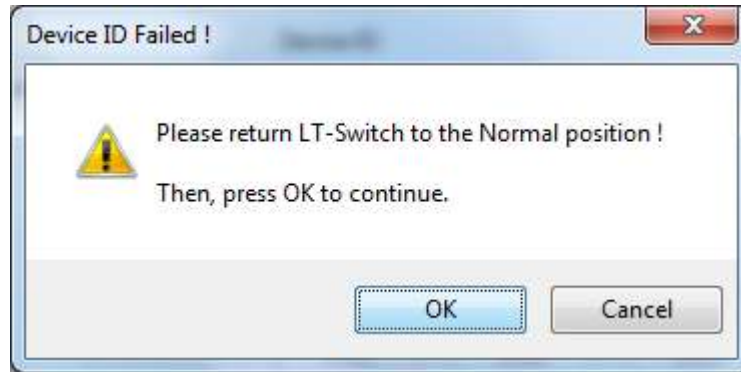

You should now get Status 0x72 and you are in vendor mode. As soon as you see the flash chip properties switch the OP SWITCH up to Normal mode right away (Green LED). Hold probes in place and dump firmware by pressing READ button,

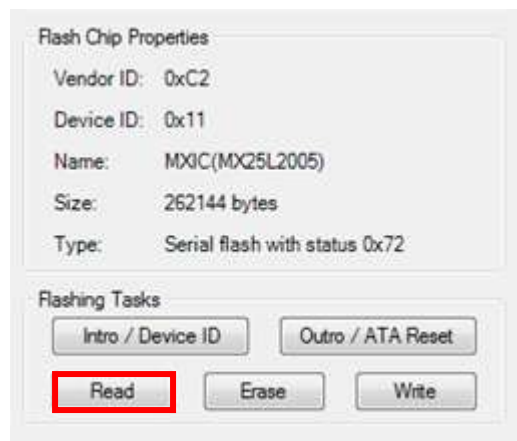

**Now you have a choice, you can either**

1. ONCE "save" button appears you can remove probe, power off CK3 and SAVE that OFW  
Once you have dumped the drive simply repair the traces with the conductive glue that is included with the Xecuter Probe II (or use your own if you bought the early batch that wasn't included - simply solder) and you can then proceed to erase and flash your liteOn as normal!

Simply load your Lite-OFW as source (if you have closed Junglesflasher whilst you repaired your PCB traces) AUTO load the target firmware, then Proceed to [ERASE & WRITE](#)

OR

2. Continue to hold probe in place, allow JF to Autoload the fw, select **Mtk tab** then press [WRITE](#) (*remember to repair your trace cuts when finished!- before testing in console* ).

## Vampire Using Rebuild Board

Install the Rebuild board as shown on [360Xtractor website](#).

On MtkFlash32 Tab of Jungleflasher – Press **intro/Device ID** Button then press the Yes on the pop-up window that appears.



Which will lead to show the following


```
This is a 32 bit process running on 4 x 32 bit CPUs
portio32.sys Driver Installed
portio32.sys Driver Started, thanks Schtrom !
Found 0 Com Ports.
Sending Vendor Intro to port 0xE800
Status 0x7F
Re-sending Vendor Intro:
.....
```

**DONT POWER XTRACTOR YET.**

**PRESS THE BUTTON ON THE VAMPIRE AND HOLD IT, then make the PIN101 Probe touch the “VAMPIRE P101” Pad on the rebuild board,**

**IMPORTANT, ITS RECOMMENDED - TOUCH ON THE PAD SURFACE AND NOT ON THE HOLE.**


3.3v probe its **NOT Required** to touch the pad since the rebuild board already supplies the required voltage, you can just have it not touching the pad at all, in case you choose to touch with the probe make sure **don't put into the hole.**

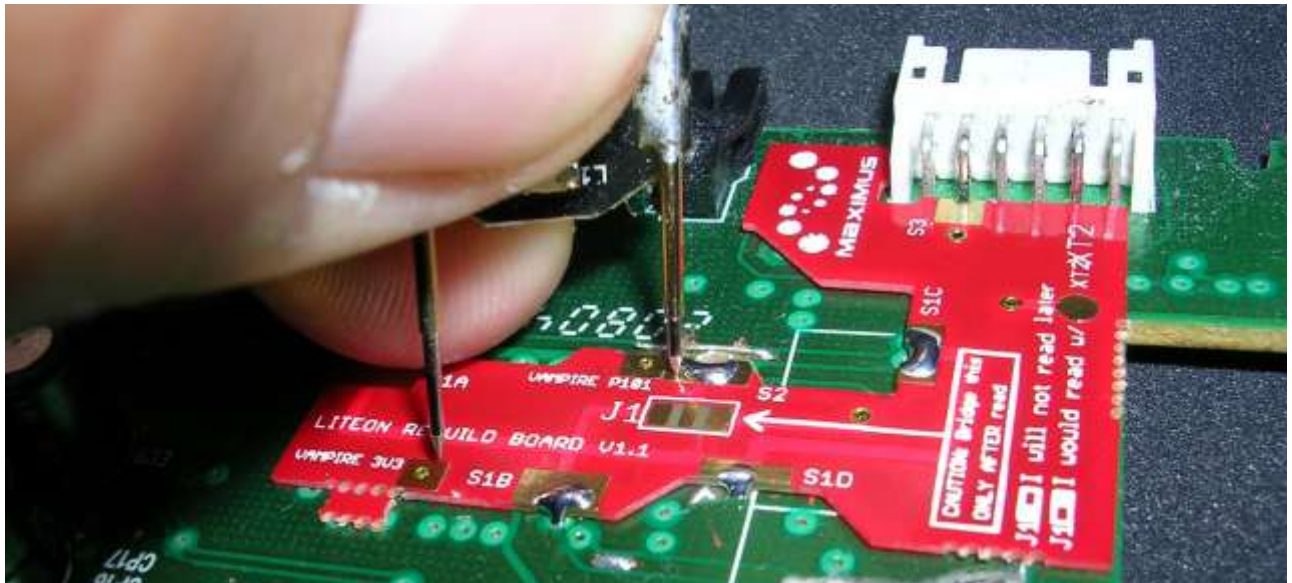

While you are holding the button in and the probes are in contact with board


### **TURN ON XTRACTOR**

after 1 or 2 seconds you should see the drive gets detected with a Status 0x72

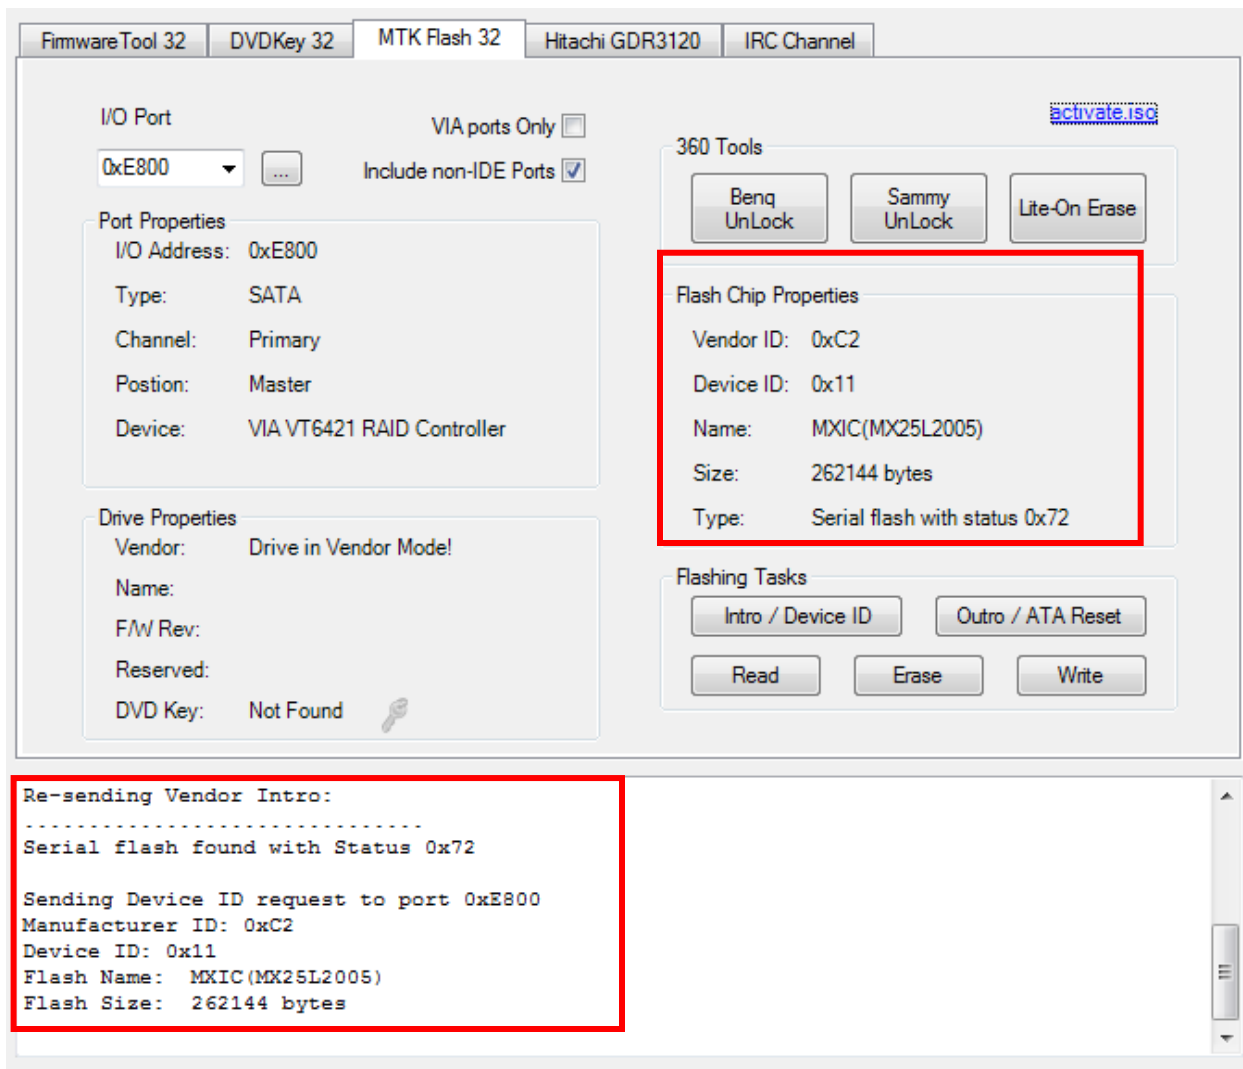

In case you get STATUS 0x72 but the VENDOR ID/DEVICE is 0xFF press **INTRO/DEVICE ID** If status keeps 0xFF try removing the Vampire first then press **INTRO/DEVICE ID** Button

Now if you have not done, remove the Vampire from touching the board and press **READ** button

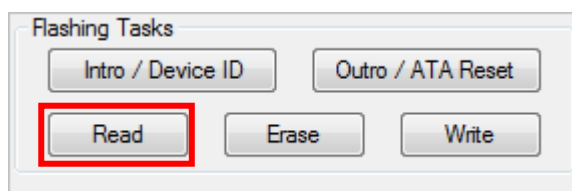

**SAVE the Firmware you have just Dumped!**

**Power off the 360xtractor and proceed to join jumper as required!**




Once you have soldered the jumper of your choice! Power on the 360xtractor again –  
Proceed to

[ERASE & WRITE](#)



## Using Vampire if you are NOT USING REBUILD BOARD!


Visit [360Xtractor website](http://360Xtractor.com).for their own Tutorial – they suggest cutting PCB as follows

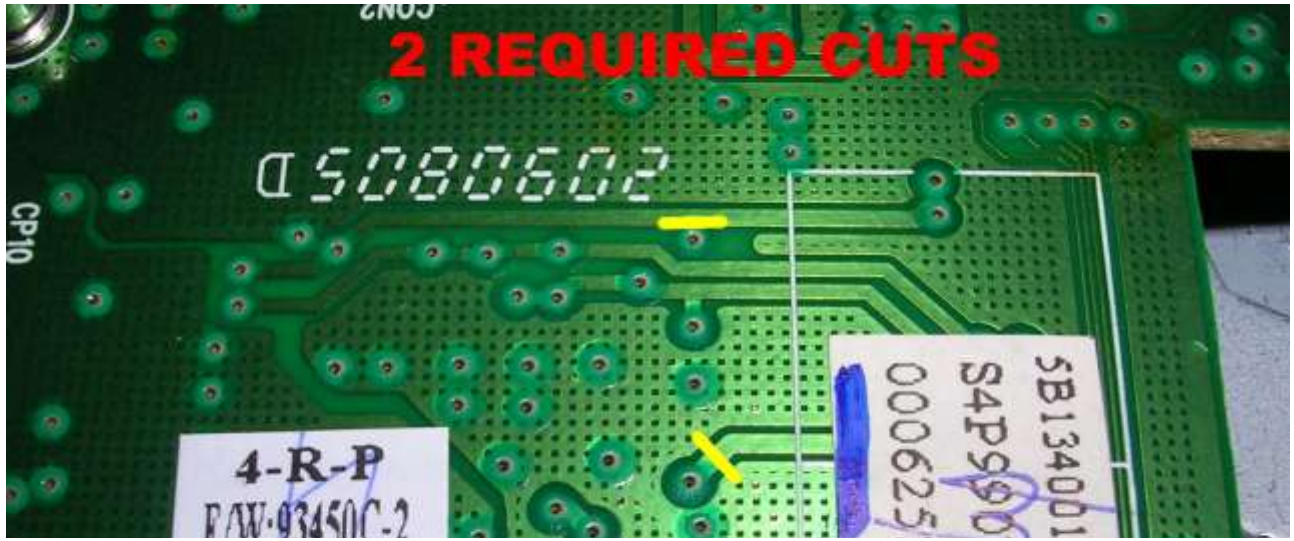

OR



On MtkFlash32 Tab of Junglesflasher – Press **intro/Device ID** Button then press the **Yes** on the pop-up window that appears.

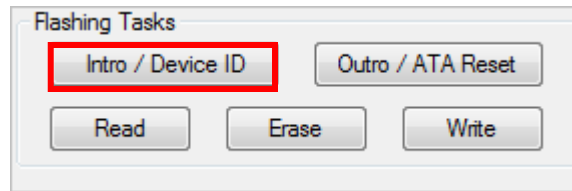


Which will lead to show the following

```
This is a 32 bit process running on 4 x 32 bit CPUs
portio32.sys Driver Installed
portio32.sys Driver Started, thanks Schtrom !
Found 0 Com Ports.
Sending Vendor Intro to port 0xE800
Status 0x7F
Re-sending Vendor Intro:
.....
```

Probe the 101 pad and 3.3v points on PCB whilst holding the button on vampire pressed in!






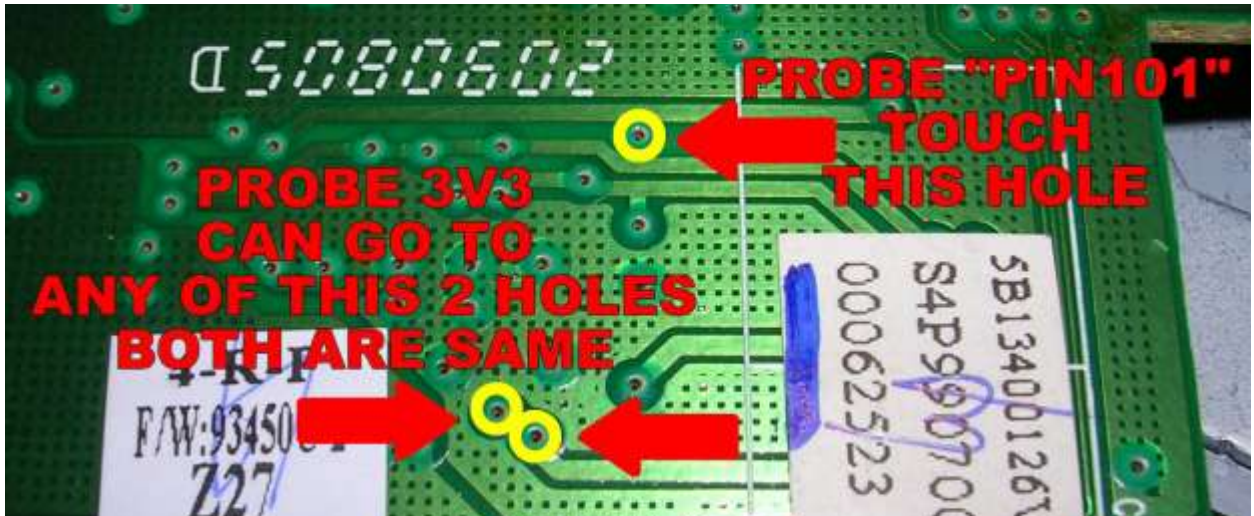

While you have the button on Vampire pressed in and probing the correct holes

**TURN ON XTRACTOR,**


after 1 or 2 seconds you should see the drive gets detected with Status 0x72

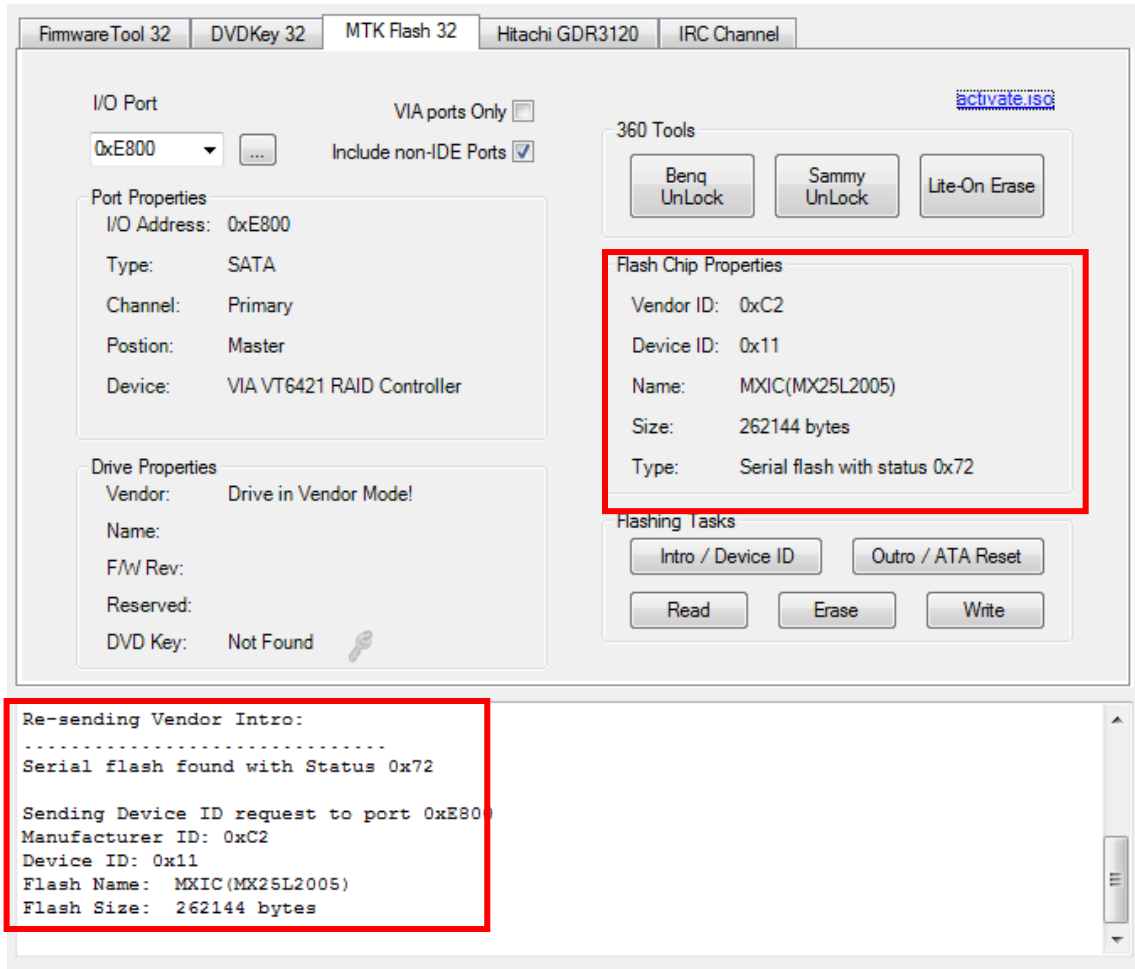

Now release the button on vamp

**whilst still Holding the probes in contact with PCB**

Then press **READ !**

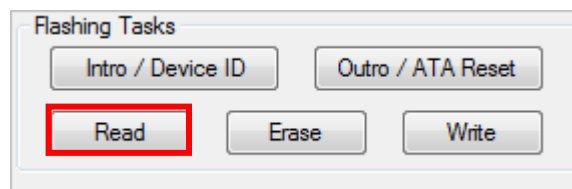


***when the "Save" option appears its safe to remove probe from PCB***

**SAVE the Firmware you have just Dumped!**

Power off the 360xtractor

Proceed to join jumper with solder as required!

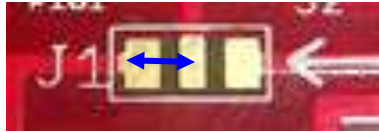

Once you have soldered the jumper of your choice! Power on the 360xtractor again –


Proceed to

**[ERASE & WRITE](#)**

## Return a LiteOn to Stock Firmware

To return a LiteOn drive to stock you need your Dummy.bin and a Stock FW for your relevant drive.

Simply load your Dummy as Source, **Decline** the Auto load of iXtreme firmware,

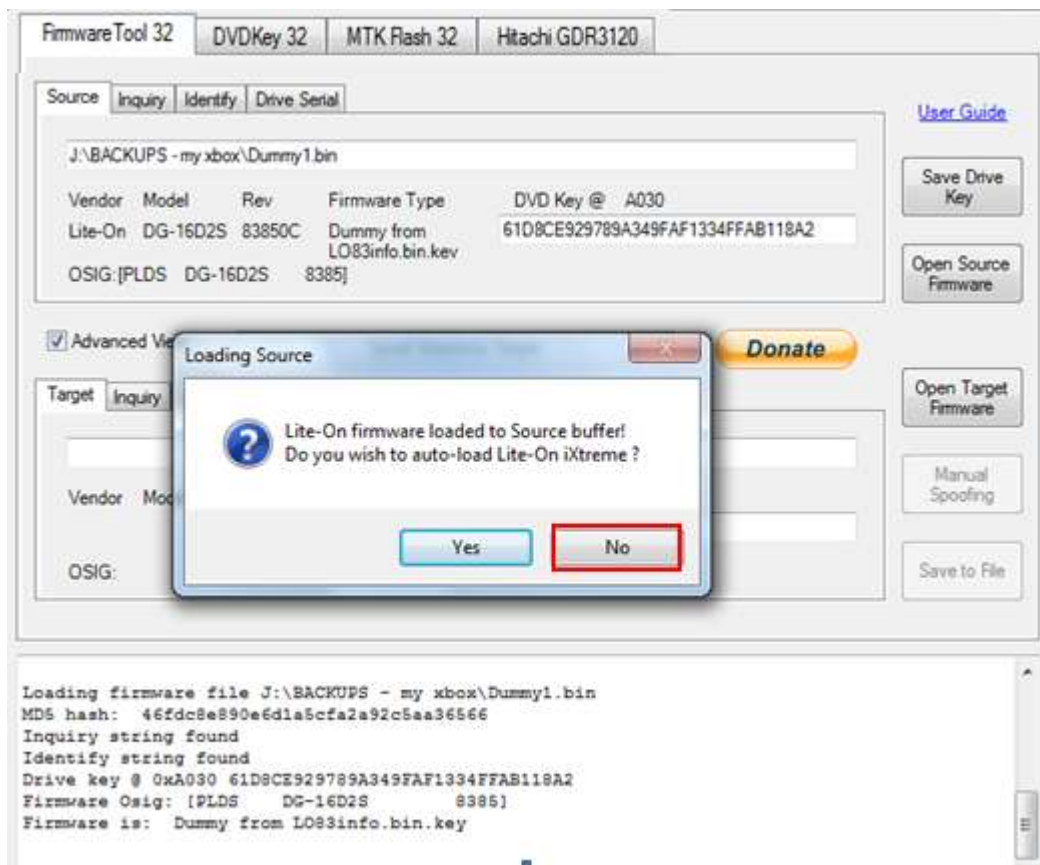

Load the stock firmware as target!

Then press **Spoof Source to Target** button

FirmwareTool 32   DVDKey 32   MTK Flash 32   Hitachi GDR3120

Source   Inquiry   Identify   Drive Serial

J:\BACKUPS - my xbox\Dummy1.bin

Vendor	Model	Rev	Firmware Type	DVD Key @
Lite-On	DG-16D2S	83850C	Dummy from LO83info.bin.kev	61D8CE929789A349FAF1334FFAB118A2
OSIG:[PLDS DG-16D2S 8385]				

☒ Advanced View   Spoof Source to Target   [Donate](#)

Target   Inquiry   Identify   Drive Serial

J:\JFBeta.0.1.69\Firmware\83850C.BIN

Vendor	Model	Rev	Firmware Type	DVD Key @
Lite-On	DG-16D2S	83850C	Stock	A36A3D78502989622195153326F8CA9E
OSIG:[PLDS DG-16D2S 8385]				

[User Guide](#)

[Save Drive Key](#)

[Open Source Firmware](#)

[Open Target Firmware](#)

[Manual Spoofing](#)

[Save to File](#)

Check the running log to see all the info has been copied over, double check the key matches. Then if required, press **Save to File** button!

FirmwareTool 32   DVDKey 32   MTK Flash 32   Hitachi GDR3120

Source   Inquiry   Identify   Drive Serial

J:\BACKUPS - my xbox\Dummy1.bin

Vendor	Model	Rev	Firmware Type	DVD Key @
Lite-On	DG-16D2S	83850C	Dummy from LO83info.bin.kev	61D8CE929789A349FAF1334FFAB118A2
OSIG:[PLDS DG-16D2S 8385]				

☒ Advanced View   Spoof Source to Target   [Donate](#)

Target   Inquiry   Identify   Drive Serial

J:\JFBeta.0.1.69\Firmware\83850C.BIN

Vendor	Model	Rev	Firmware Type	DVD Key @
Lite-On	DG-16D2S	83850C	Stock	61D8CE929789A349FAF1334FFAB118A2
OSIG:[PLDS DG-16D2S 8385]				

[User Guide](#)

[Save Drive Key](#)

[Open Source Firmware](#)

[Open Target Firmware](#)

[Manual Spoofing](#)

[Save to File](#)


Firmware Osig: [PLDS DG-16D2S 8385]  
Firmware is: Stock

Spoofing Target  
DVD Key copied to target  
Inquiry string copied to Target  
Identify string copied to Target  
Serial data copied from Source to Target

[PROCEED TO ERASE & WRITE – CLICK HERE!](#)

## Using the KeyDatabase to Retrieve/Create your Firmware

So – you have connected your drive that you flashed already! You know it's in your Key Database as you flashed it previously. Connect it and refresh the port!

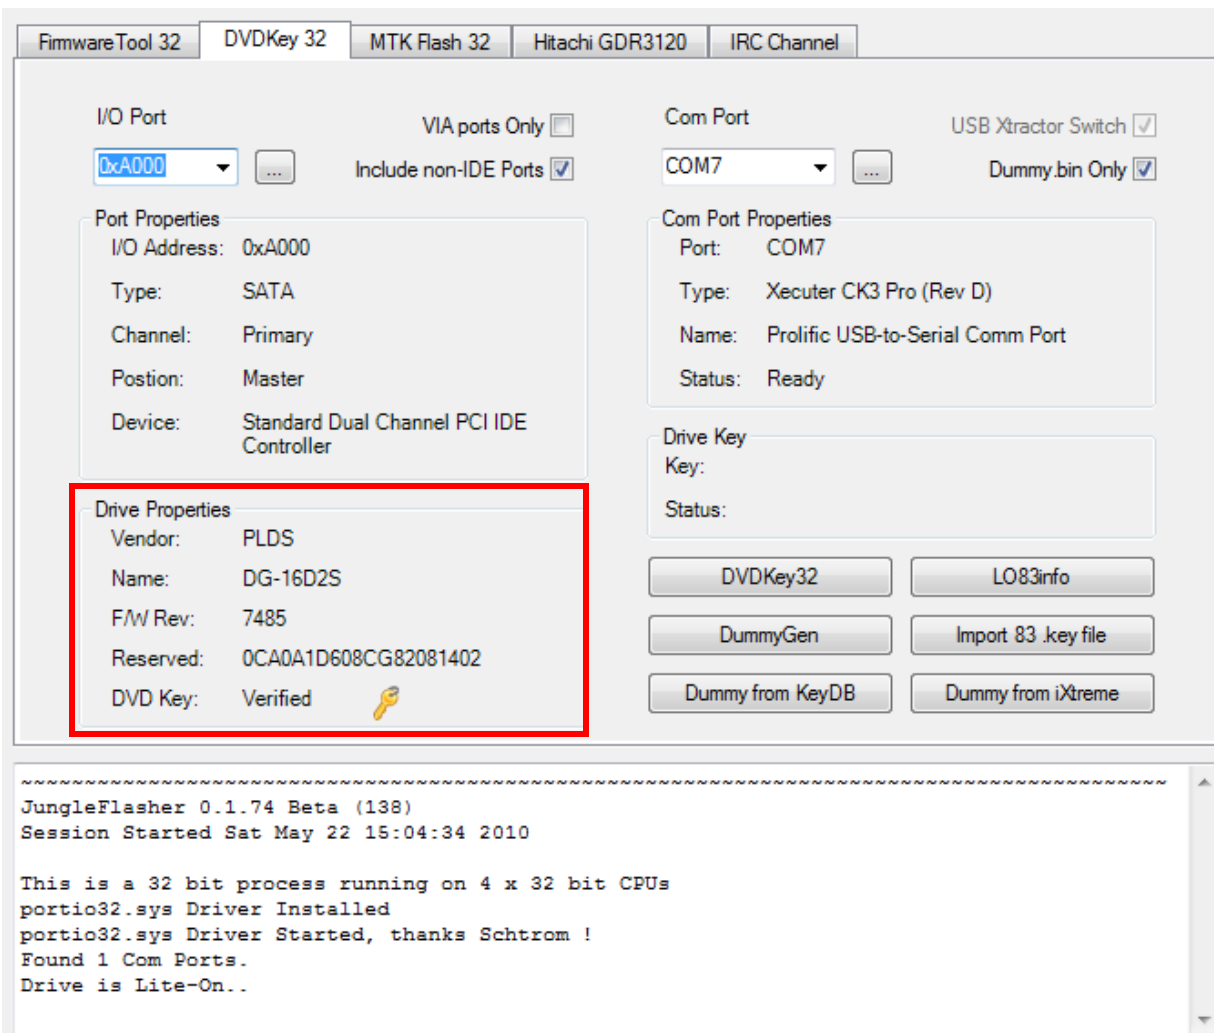


Just from refreshing the port Jungleflasher has identified that you have previously dumped this drive, it looks up the key from the database and tests it on the drive!

– It's verified! 😊

So WITHOUT MRA you know what the key is for this drive!


As it's in the Key Database.

To use this information to re-flash your drive with an update or back to stock firmware, you have several choices! Follow the route below

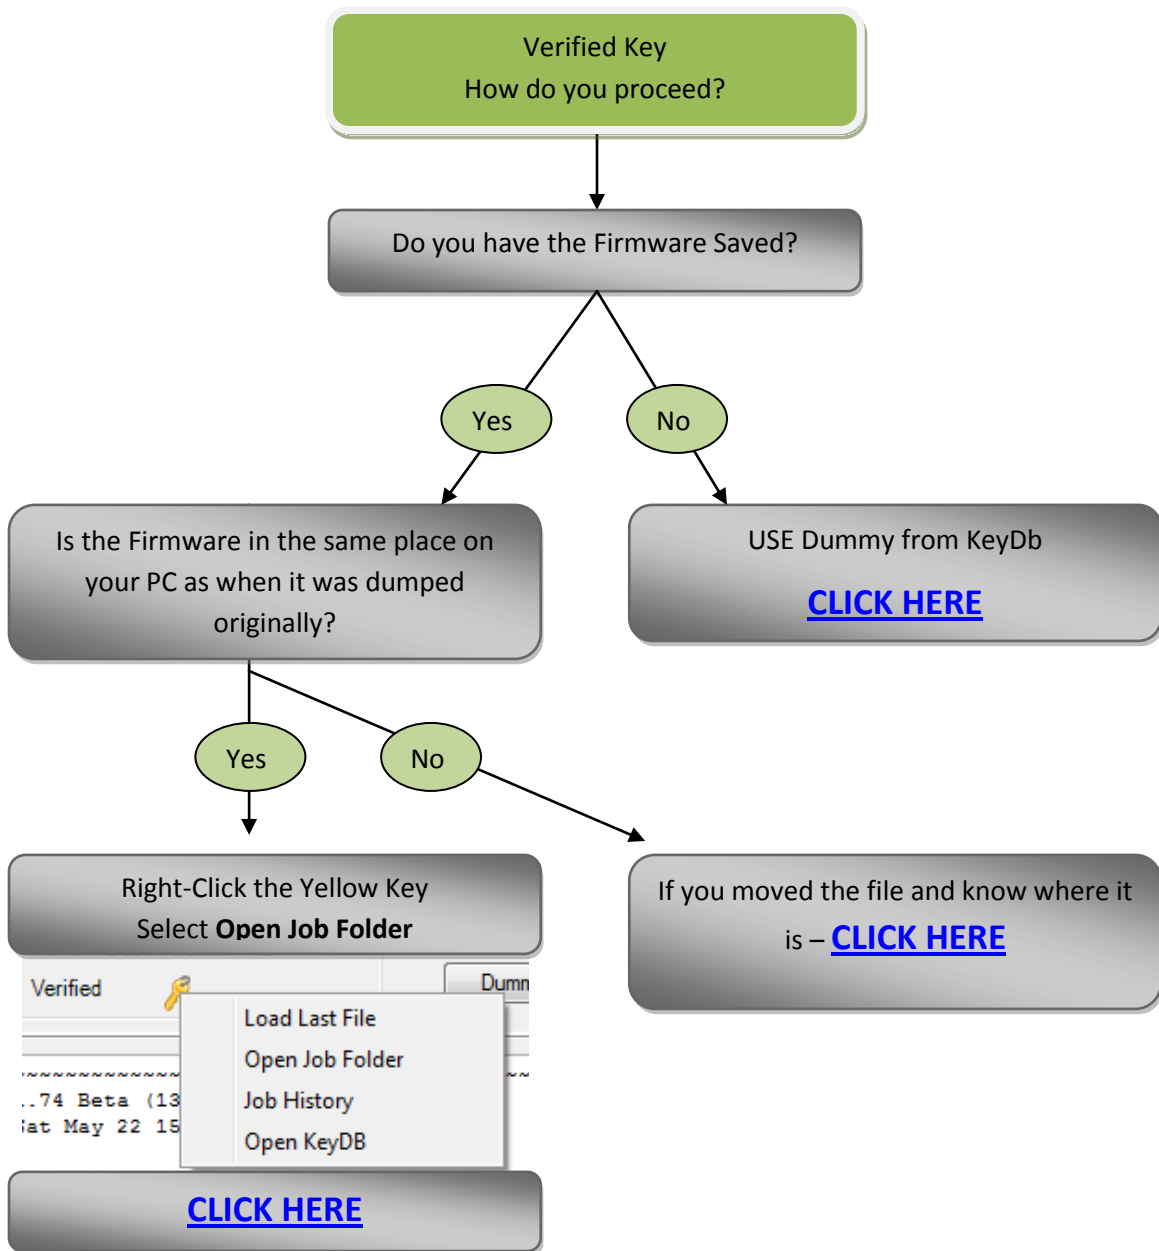


The other options in that menu are self-explanatory! If you need to ask what they do then maybe you shouldn't be modding drives!

IF you want to open the folder containing the firmware you dumped from the drive originally select **Open Job Folder**

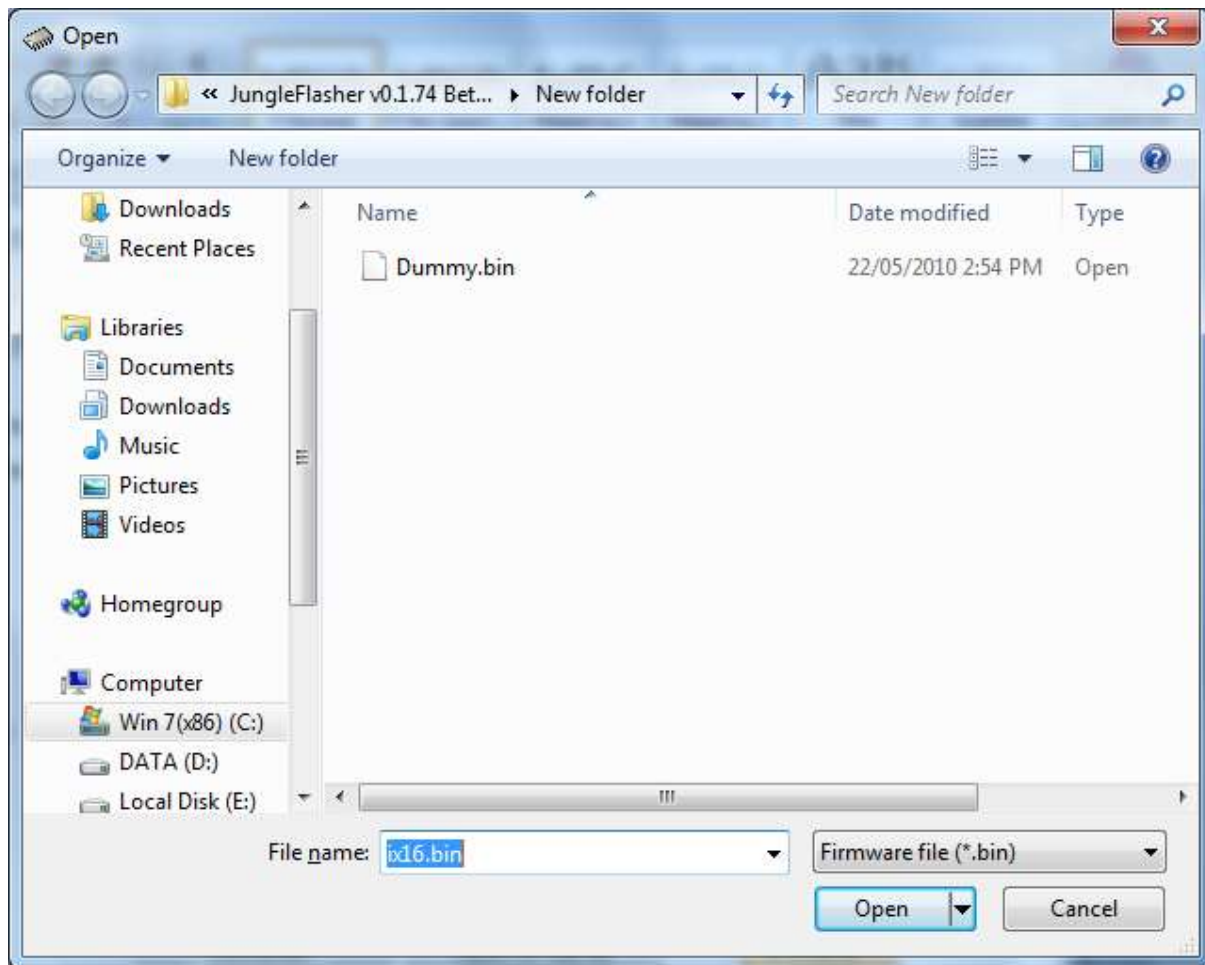

Select the Dummy.bin or Lite-OFW.bin (dependant on how you dumped firmware in first place)

NOTE : If you have moved the folder you will see this!

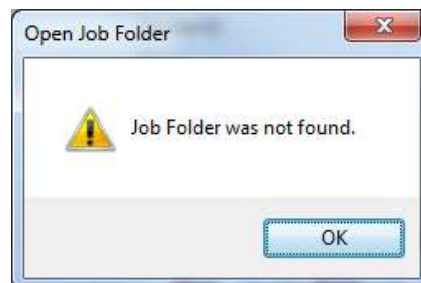


If you know where it is [CLICK HERE](#)

NOTE: IF YOU DONT HAVE THE FIRMWARE SAVED? [CLICK HERE](#)




It will open as source and auto load the latest iXtreme firmware.

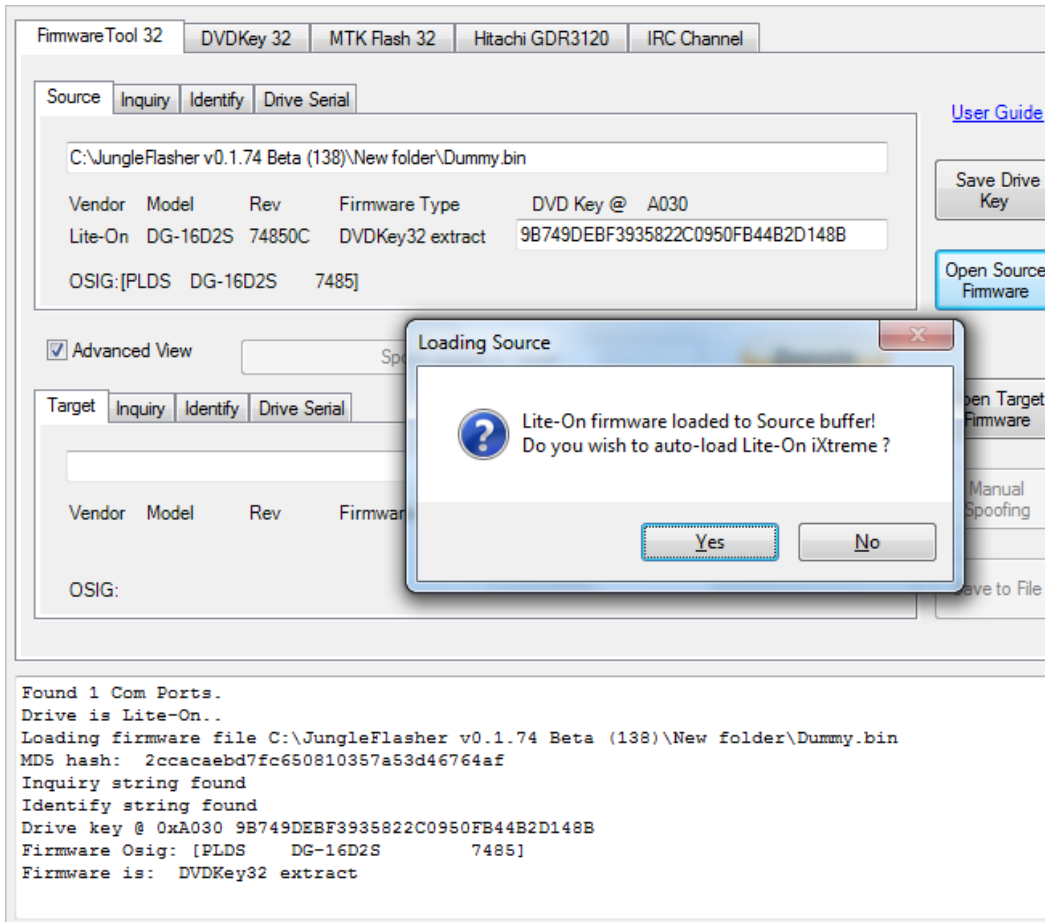


Then follow the normal [ERASE/WRITE procedure](#)

Have the firmware saved in another location? Go to **Firmwaretool 32** tab, **right-click** over the source section and select **load fw** or click **Open Source Firmware** button

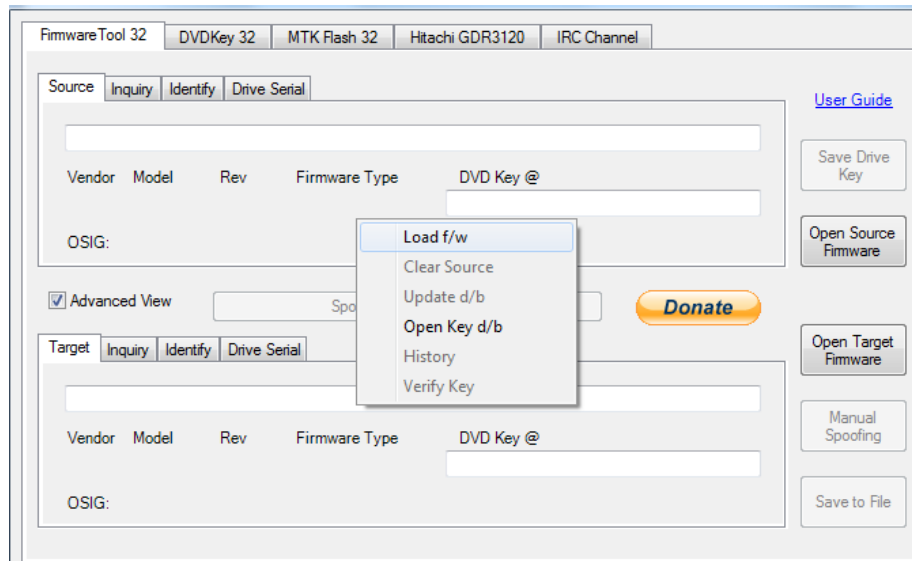

Open the firmware file you think is the correct Dummy.bin or Lite-OFW.bin  
Allow it to autoload the latest iXtreme Firmware. Then **right-click** over the source firmware section again. Select **Verify Key**.

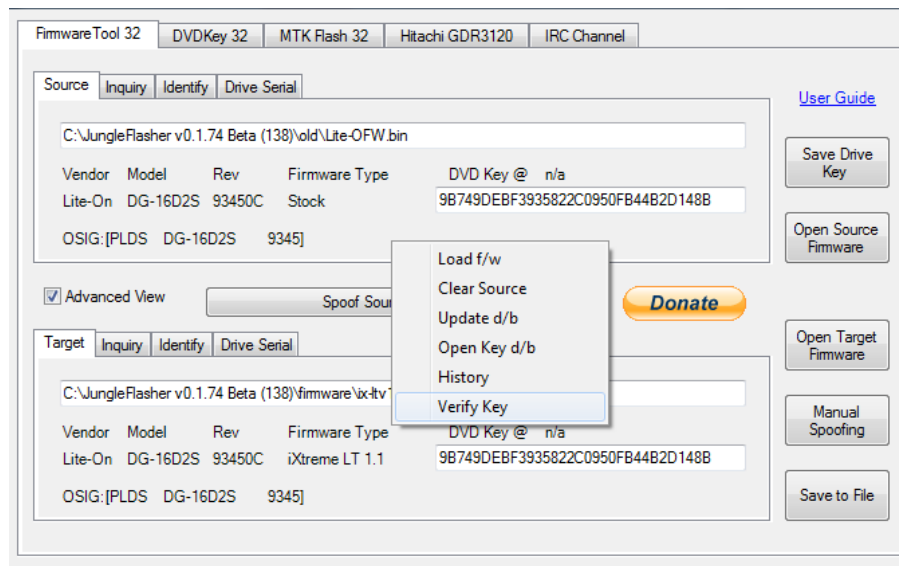

Now check the Running log for this!

```
Attempting to verify Source Key to drive on port 0xE800
Source Key 9B749DEBF3935822C0950FB44B2D148B verified.
```


It's Verified against drive 😊 click **MTKFlash 32tab** and proceed to **ERASE/WRITE**

## Using the KeyDatabase to Create your Firmware

*If you are convinced that you have flashed this drive before (regardless of type) but it doesn't show as verified initially - you can test all the keys in your Key Database by using "Dummy from KeyDB" it will only create new firmware for Lite-ons but it will find the correct key of other types of drive, if you have it in the database! (if you have a lot of keys in DB it may take some time)*

You no longer have the Dummy.bin or OFW.bin but the drive is showing as verified in KeyDB?


Connect the drive and refresh the port, ensure it shows up as having a verified key.

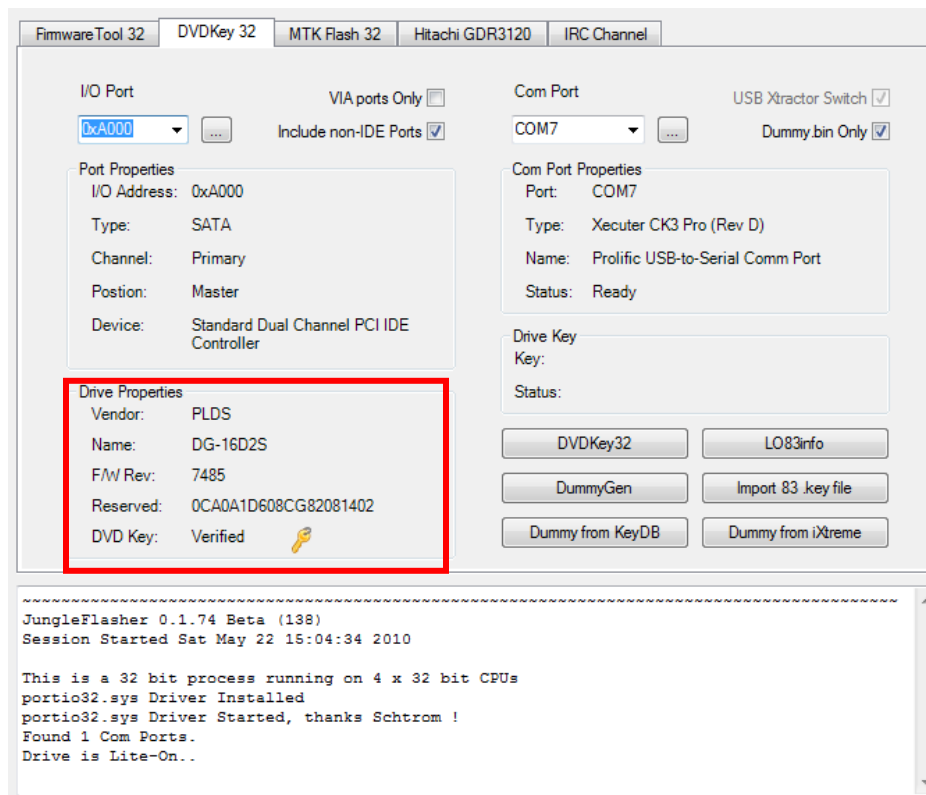


Click **Dummy from KeyDB** button



Then it will ask you to save the new Firmware it has created from the Key DB and querying the drive itself.

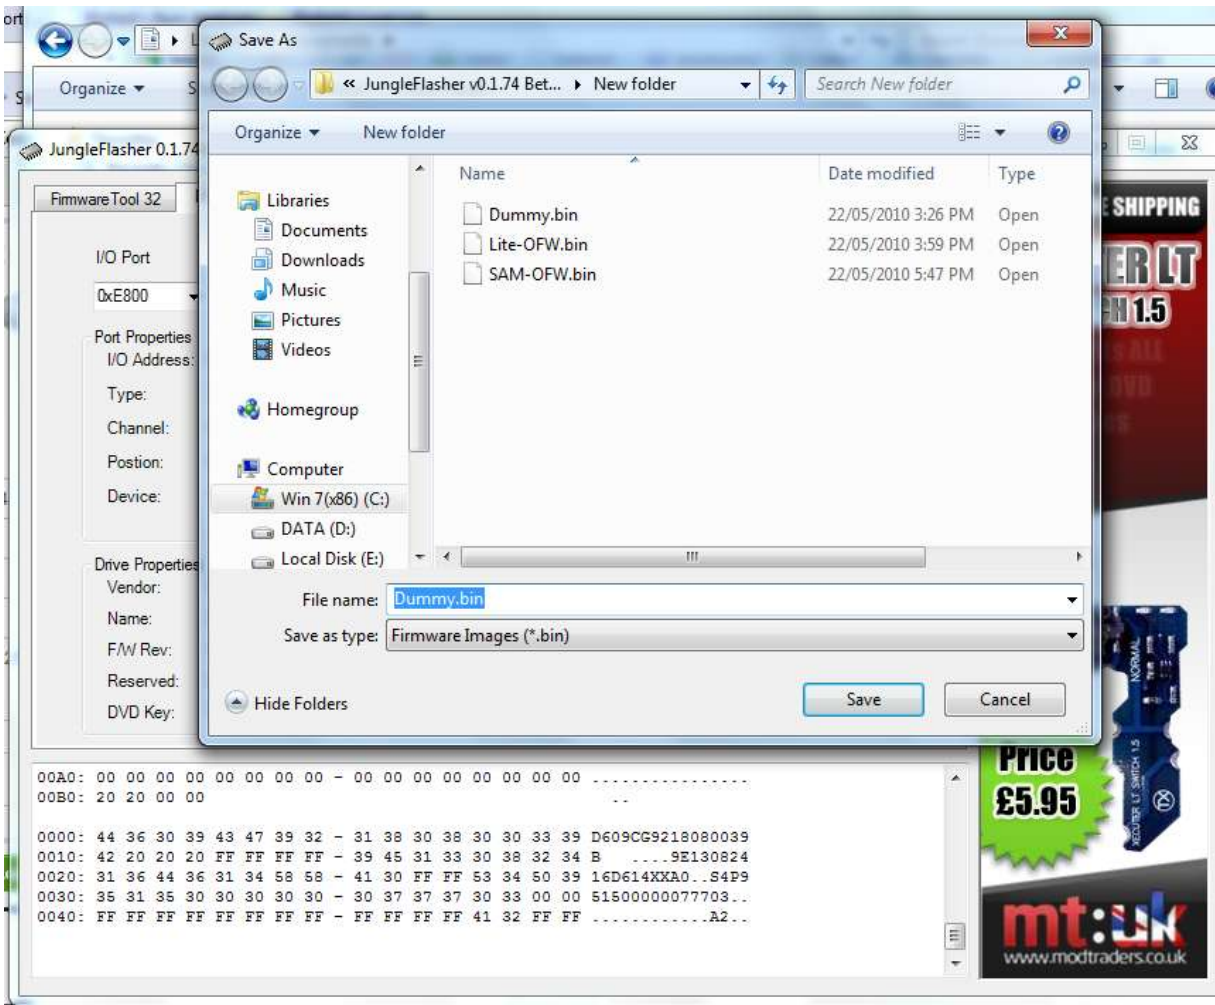

Then will automatically load the new firmware as source

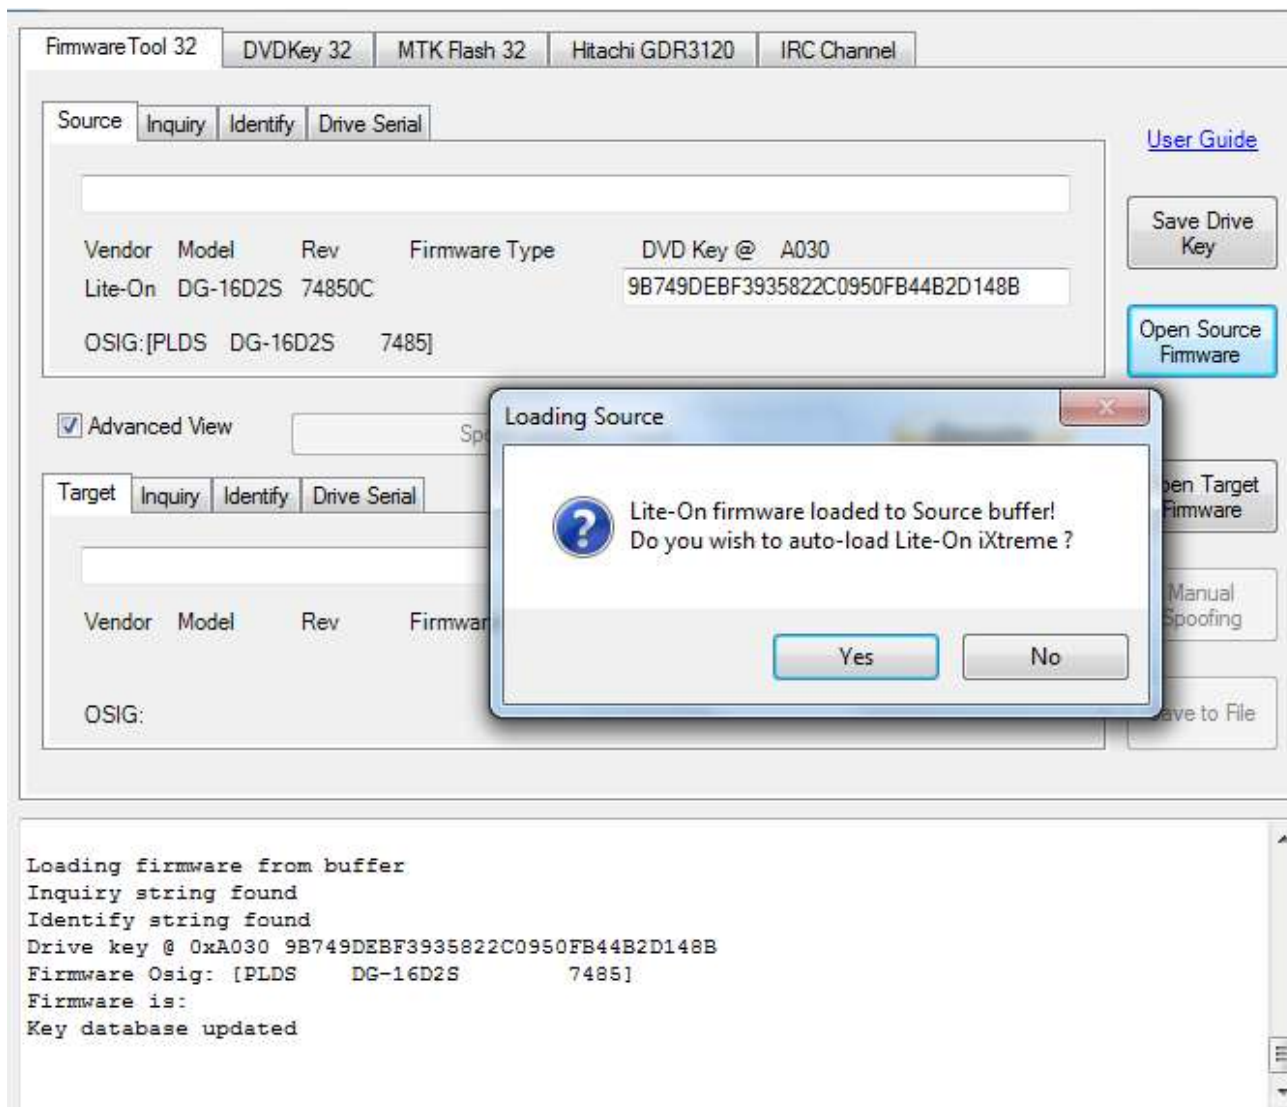

Click **Yes**,



## Removing VIA drivers (Windows XP/Vista/Win 7)


**NOT TO BE DONE IF YOUR MAIN HARD DRIVE IS ON VIA SATA CARD or IF YOUR VIA CHIPSET IS ONBOARD(i.e. NOT A PCI CARD)**

This is how I done it, it worked fine, may not be 100%


In Win XP

Win 7


Right Click My Computer, select properties

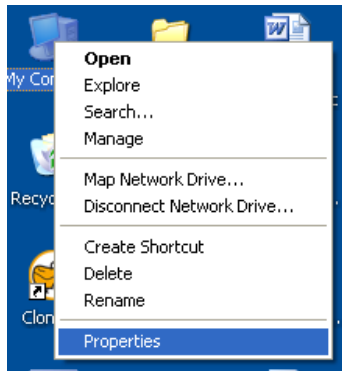


Click the "Hardware" tab

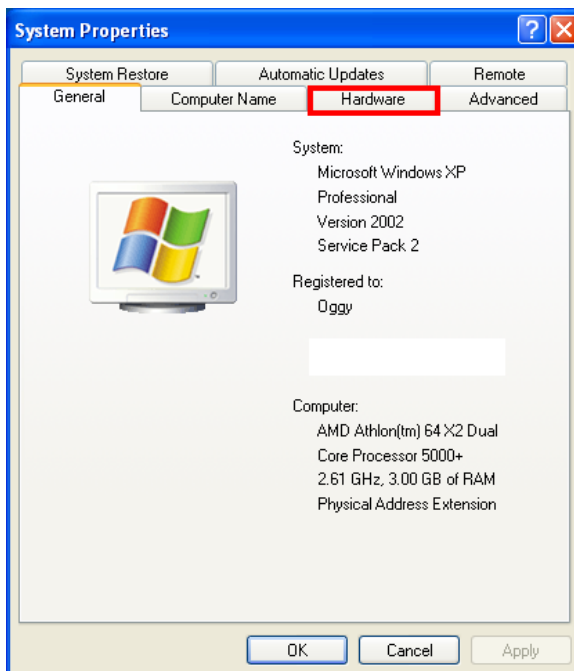


Then, click "Device Manager"

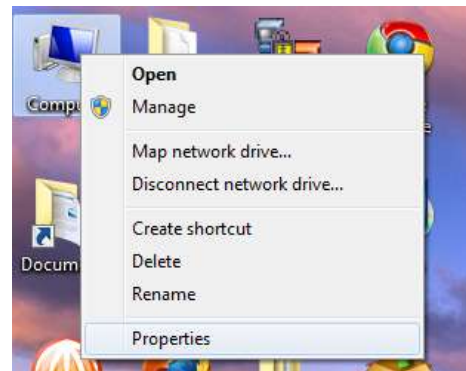

Click "Device Manager"

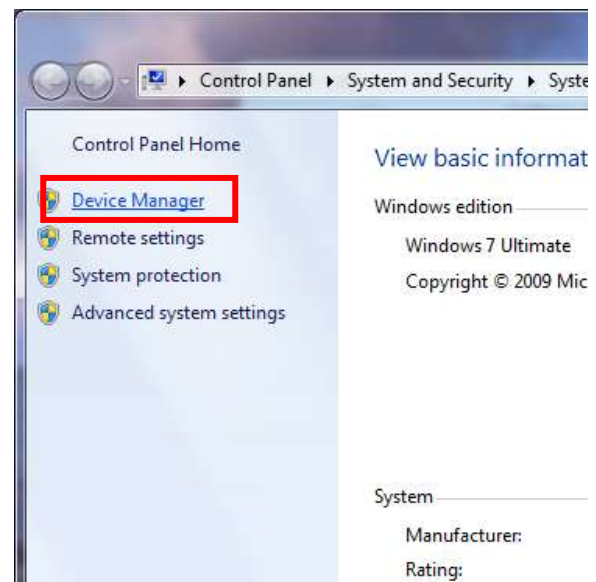




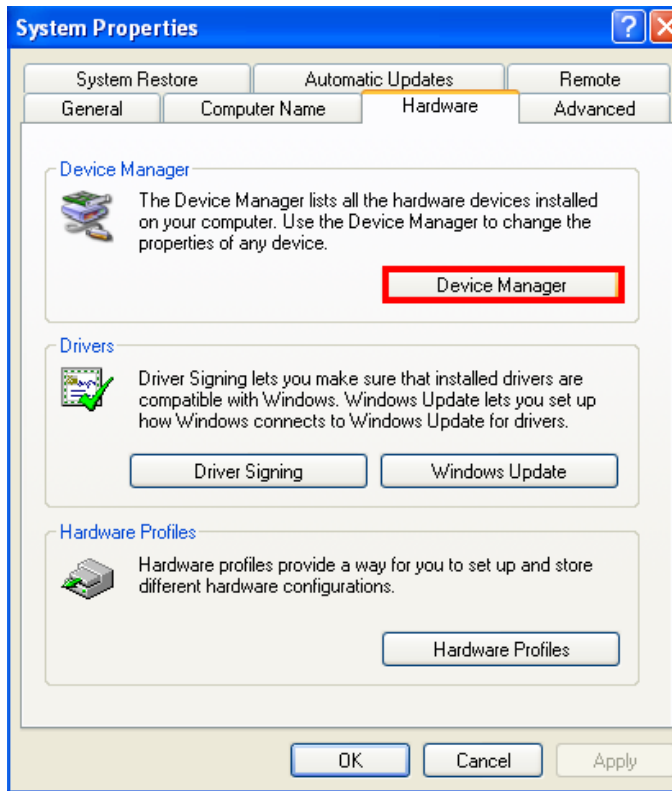

BOTH OS INSTRUCTION'S NOW BECOME IDENTICAL


Navigate to "SCSI and RAID Controllers" and click the + sign to expand the list

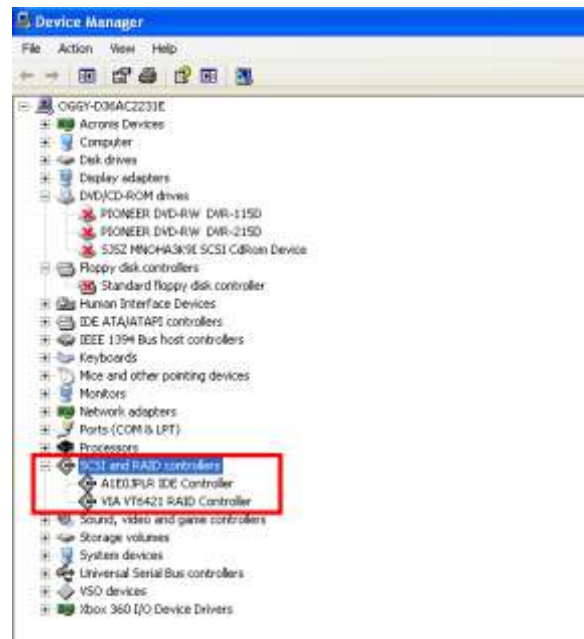


Right Click the VIA 6421 RAID Controller (may report as 3249 if using 550b drivers or above) and




select **Disable**

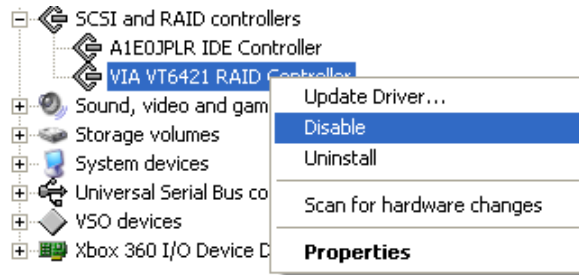

Acknowledge the warning by clicking **Yes**

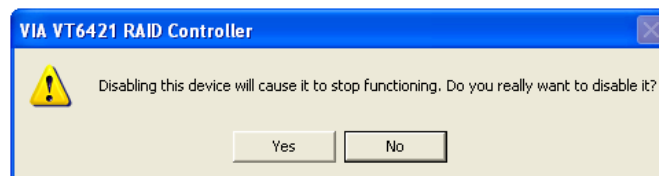

It should now show as disabled in Device Manager like so:



Now, to remove drivers we must navigate to where relevant file is

mine were located, and most will be: C : \WINDOWS\system32\drivers\ **XXXXXXX.sys** file –


Depending on your motherboard and OS

For XP normally called **viamraid.sys**  
For Vista/Win 7 normally called **vsmraid.sys**  
For some x64 setups it may be called **viamrx64.sys**


Once found, delete this file.

Once deleted, go back to device manager using the same steps outlined above.

Find your disabled VIA 6421 Card, right click and select enable

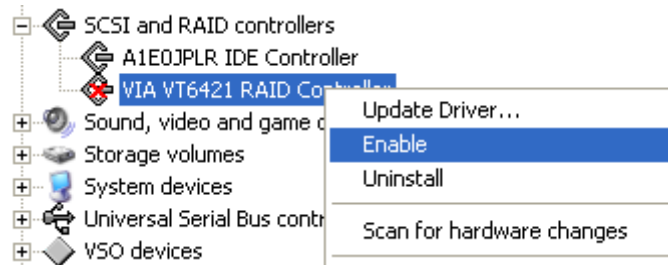

It should now show as the image below

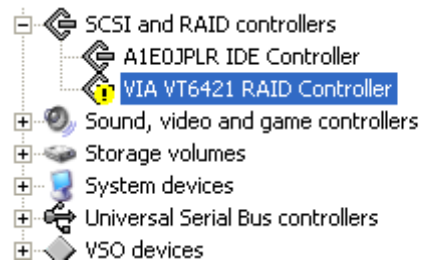

If so, reboot your PC

Upon reboot, verify VIA 6421 still has a Yellow Exclamation Mark in Device Manager

You have successfully removed VIA drivers from your machine

**[CLICK HERE TO RETURN TO STARTING POINT](#)**

## Manual Spoofing

Hopefully the excellent key, OSIG and serial spoofing of FirmwareTool32 should satisfy your needs, but sometimes you need the manual method for whatever reason.

Located in FirmwareTool32

**You need the firmware you wish to Spoof loaded into the target buffer**

**NOTE- You CANNOT SPOOF a LiteOn Drive with LT Firmware as a DIFFERENT DRIVE**


Once loaded, Click **Manual Spoofing**



## Changing Drive Keys

Here you can manually type a Drive Key – It must be in Hex-Decimal format. It should **ONLY EVER** really be used if you have your Drive Key in a text file or email.

If you have a key.bin or 'Original Firmware' you can save to key.bin as shown above in the **Save key to file** section and use the **Load key.bin** option

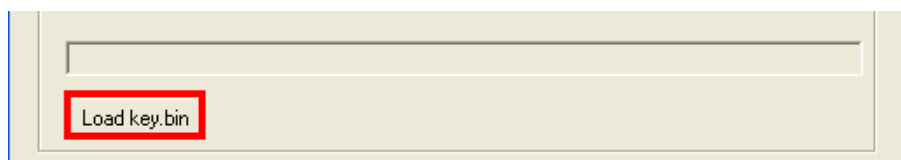

Just click load key.bin and navigate to your key.bin file, select it then it will automatically load it into the **Manual Spoof Window**.

## Changing Drives OSIG (String ID)

Simply select the drive you want your new drive to report to the console as, from the drop down list and click **OK**.

**If Changing OSIG to a Lite-On PLDS DG-16D2S this will activate the Lite-On Barcode section of Manual Spoofing, please see below for instructions.**

### **Spoofing Lite-On Barcode into Inquiry String**

This is for Spoofing a drive in place of a Lite-On manually, once Drive Key is inserted, you will want to spoof as PLDS DG-16D2S, next you want to load your identify.bin by clicking **Load Inquiry.bin** and navigating to **Inquiry.bin**, upon selecting it, JungleFlasher will load it into the window, now you can click **OK** to finish spoofing the firmware.

If you don't have the **Inquiry.bin** file, JungleFlasher will let you manually type the barcode (located on the top of the Lite-On) into the box, in the format of **17 Alpha-Numeric Characters followed by 3 spaces. You MUST include the spaces manually.**

e.g.

**D608CG82690600G2W\_\_\_\_**




Then, click **Ok** to finish Spoofing the Firmware

**[CLICK HERE TO RETURN](#)**

## VIA Ports only & Include Non IDE ports

Found under **DVDKey32** tab,

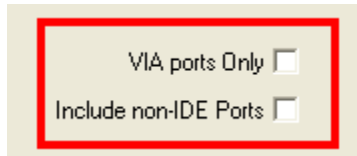

### VIA Ports Only

This feature suits those who have quirky onboard Sata Cntrollers ( SIL, JMicron) and a VIA6421 PCI Sata Card.

Checking the box removes all **non-via** sata ports, this will stop you trying to Inquire / DVDKey a drive on your non-via SATA/IDE ports. Some chipsets don't like the Inquiry and will hang the system.

**\*\*NOTE\*\* If you do not actually have any VIA ports, JungleFlasher will itself uncheck the box and re-enable the non VIA ports**


### Include non-IDE Ports

This option allows you to scan port for contollers Classed as SCSIAdapter. Some newer chipset use the Class rather than hdc (aka IDE). However this will also show actual SCSI controller which are obviously of no use for flashing. Please avoid this function unless you know what you are doing.

[CLICK HERE TO RETURN](#)

## LiteOn 'Serial Fixer'

If you are prompted that serial data is missing in an error similar to this:

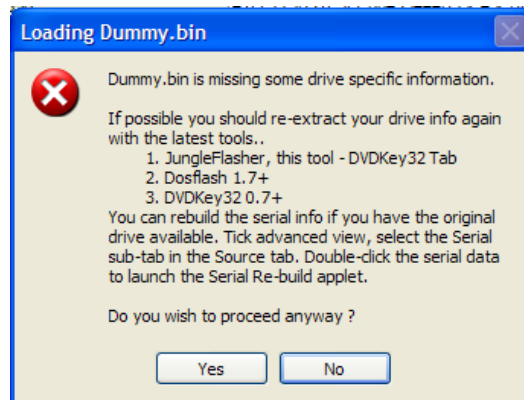


To fix proceed, click Yes.

JungleFlasher will then, ask if you wish to repair this data (only possible if you have original source liteon available).



Click yes to rebuild data.

JungleFlasher will then pop up the **Serial Rebuilder Applet**

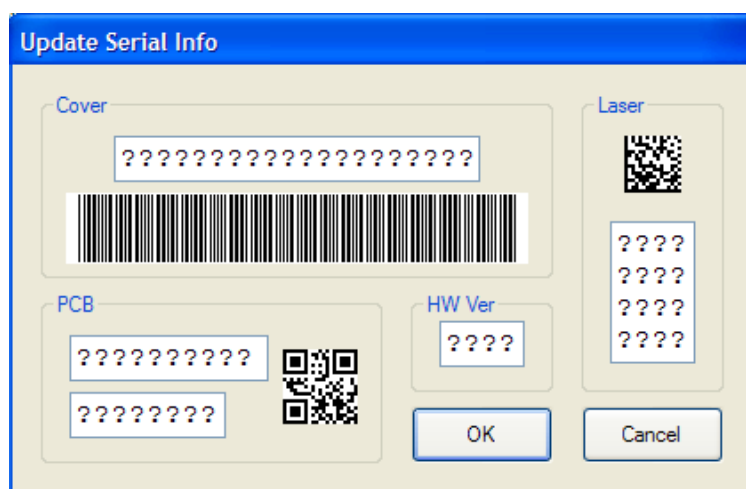A "Update Serial Info" applet window. It has four main input sections: "Cover" with a long text box of 16 question marks and a barcode; "Laser" with a QR code and a 4x4 grid of question marks; "PCB" with two 8-character text boxes and a QR code; and "HW Ver" with a 4-character text box. At the bottom are "OK" and "Cancel" buttons.

To rebuild the **Serial Data** you must copy the information from the **physical drive itself**, into the boxes in the applet shown.

The data required is located in 4 places:

1. The **Drive Chassis / Shell**
2. The **Hardware Revision** of the drive
3. The **Laser**
4. The **PCB** of the drive itself

### 1. The Drive chassis / Shell

Located on the top of the drive, and 17 Characters long



Insert into the **cover** area on the **Serial Rebuilder**

### 2. Hardware Revision

Possibly the easiest of the four, located on the top sticker of the drive and usually A0A1 or A0A2



Insert this data into the **HW Ver** section of the **Serial Rebuilder**

### 3. The Laser

Self explanatory, located on the base of the laser.



Insert this into the **Laser** area of the **Serial Rebuilder**

#### **4. The PCB of the Drive**

You will need to remove the top of the Drive Case to see this data and it is sometimes obscured by pen.

The Data will start **S4P.....** It's the 2<sup>nd</sup> and 3<sup>rd</sup> Line you require



Insert this data to the **PCB** section of the **Serial Rebuilder**  
Once done, click **Ok**, and save **Dummy\_fixed.bin** when prompted

**[CLICK HERE TO RETURN](#)**



### Spoofing as a different type of drive

Apart from spoofing a hitachi drive(as another type), the technique is very simple!  
To begin with you should have a original dump from the drive you wish to “clone”

**NOTE- You CANNOT SPOOF a LiteOn Drive with LT  
Firmware as a DIFFERENT DRIVE**

– so, you should have a pre dumped bin file from the donor drive!


for LiteOn a Dummy.bin  
for Samsung a Sam-OFW.bin  
for Benq a Ben-OFW.bin  
for hitachi a Hit-OFW.bin

Now follow the tutorial to unlock (follow the tut for that specific drive up to the point you would write to the drive) for whichever drive you are going to spoof as the donor drive.


For instance you have a spare samsung drive you want to test a liteOn key with before you erase your LiteOn! (you have already dumped the drive and saved the Dummy.bin)

So you take your samsung, unlock it in accordance with the tutorial!

Which would then be in vendor mode ready to write firmware to!

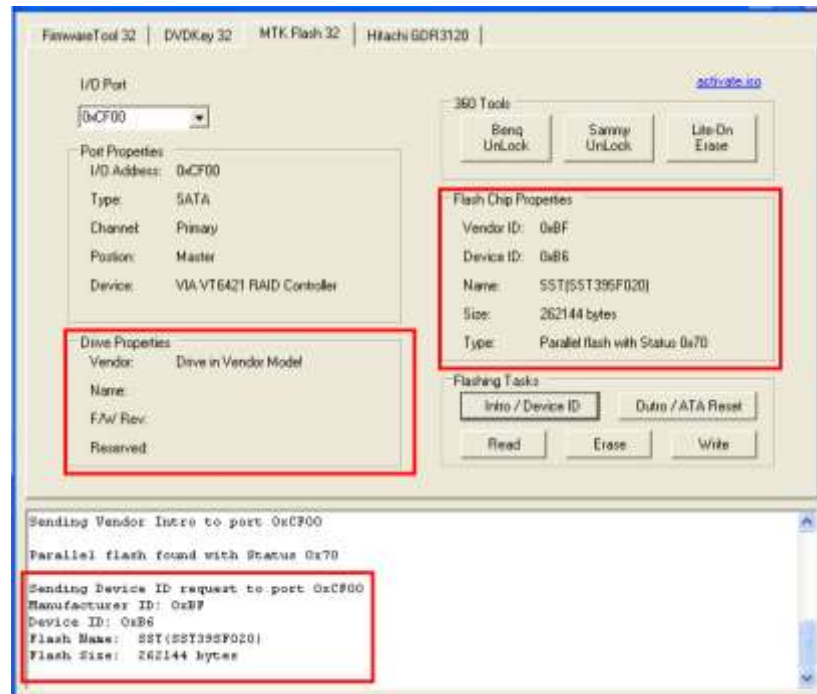


Now go to **firmwaretool 32** tab

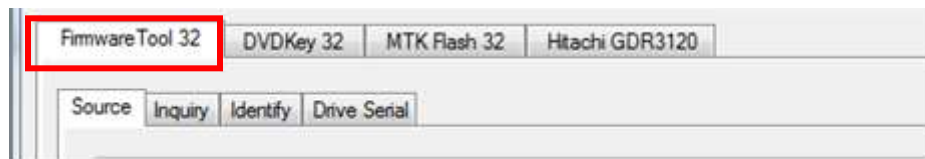

Load your dummy.bin as source –

**decline any auto load ix messages!**


Load target firmware – (you are about to flash a samsung so choose ix firmware for a samsung drive)

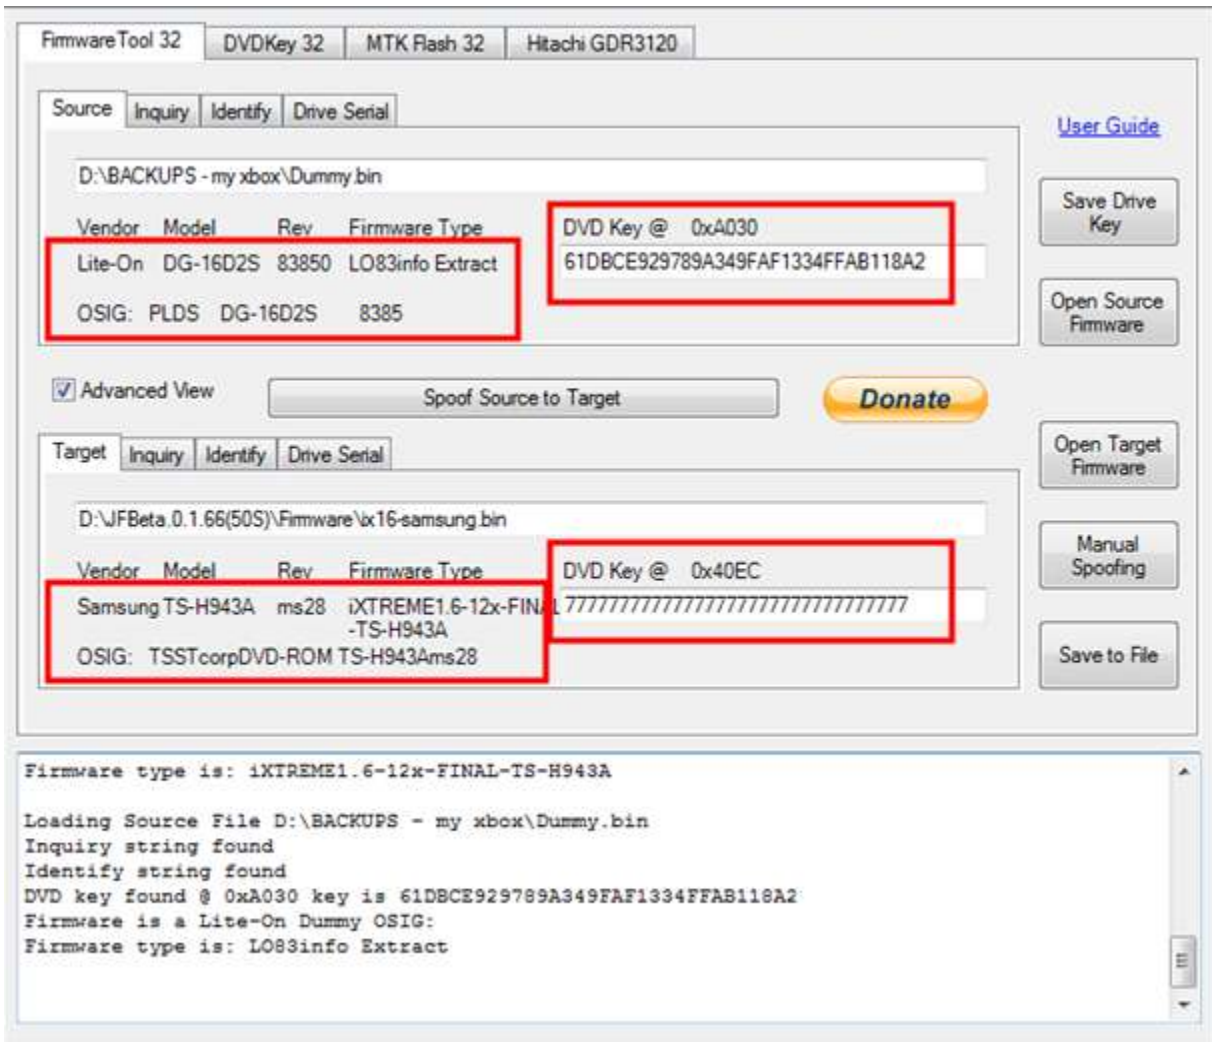

Now click **Spoof Source to Target!**



Notice the difference in the target firmware now!

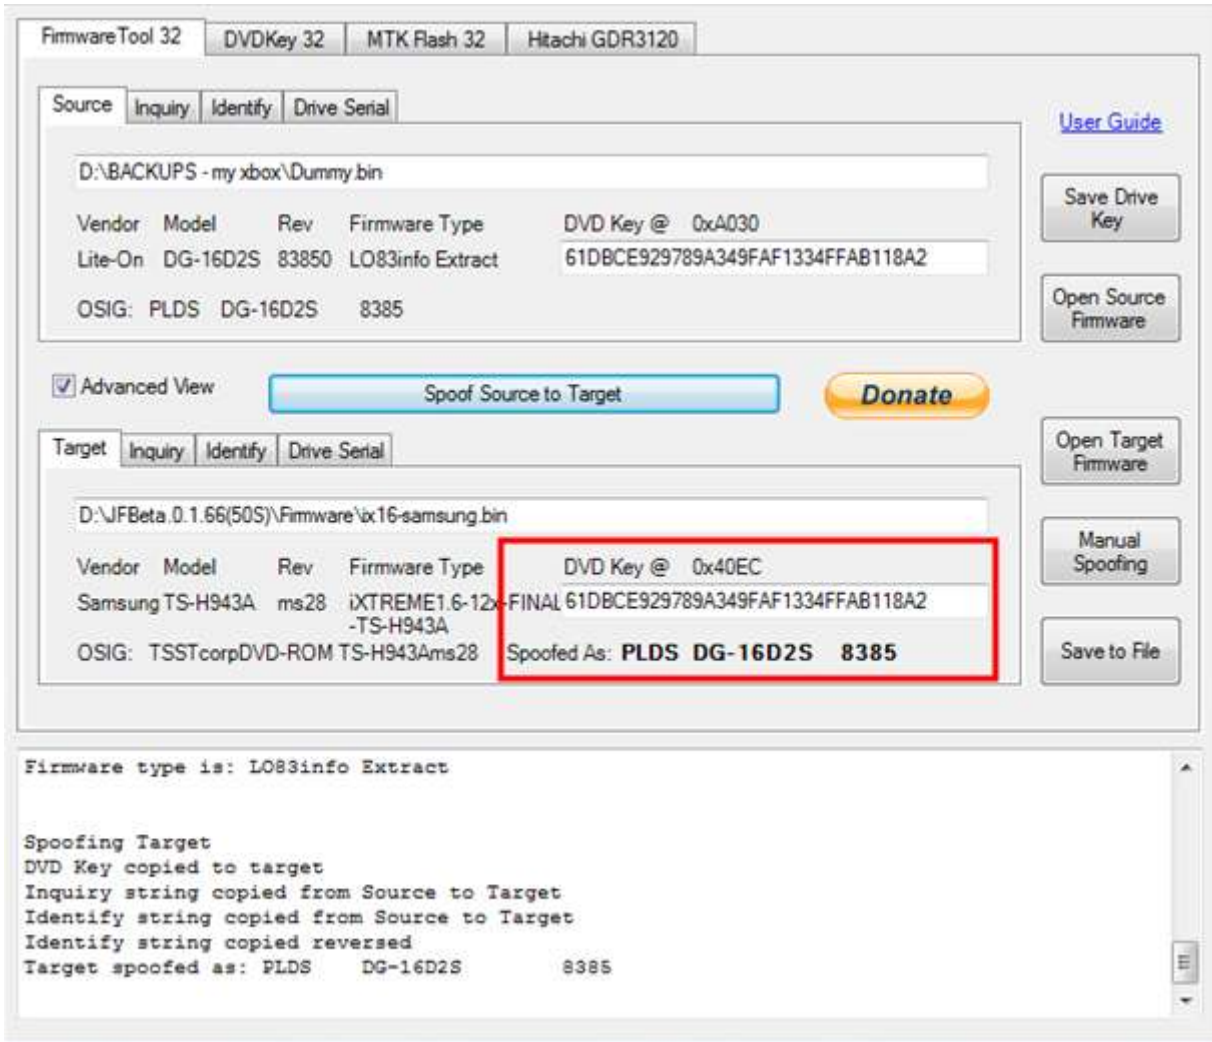

Then all you have to do is Write to the drive the same way as you would for that type of drive! In a samsungs case – click **Write** when on the **MTK** tab!

The same method applies to all drives apart from Hitachi which is covered [HERE](#)

[CLICK HERE TO RETURN](#)

## **Advanced User Info**

### **Advanced Ctrl+Fkey Functions**

**Ctrl + F1 key,**

Enable context menus

**Ctrl + F2 key,**

Disable context menus

**Ctrl+ F3 key**

To Send Vendor Intro to currently selected Port

**Ctrl + F4 key**

To open iXtreme from firmware folder to Target

**Ctrl + F5 key,**

Set Modder mode backup directory, clear folder to disable it

**Ctrl + F6 key,**

Hitachi read block size 100 --> 2000 (78 and 79 FK models will fail on this)

**Ctrl + F7 key,**

Set working folder in Modder mode... clear all tabs and save log

**Ctrl + F8 key,**

Enable Hitachi Expert Mode!

**Ctrl + F10 key**

To add/update key database from Source tab info

**Ctrl+ F11 key**


To create .csv from key database


**Ctrl + F12 key**

To open key database in Notepad

## Key Database

*For those who have NOT saved their dumped file and need their key details back.  
Try right clicking on source box and select **Open Key d/b**.*

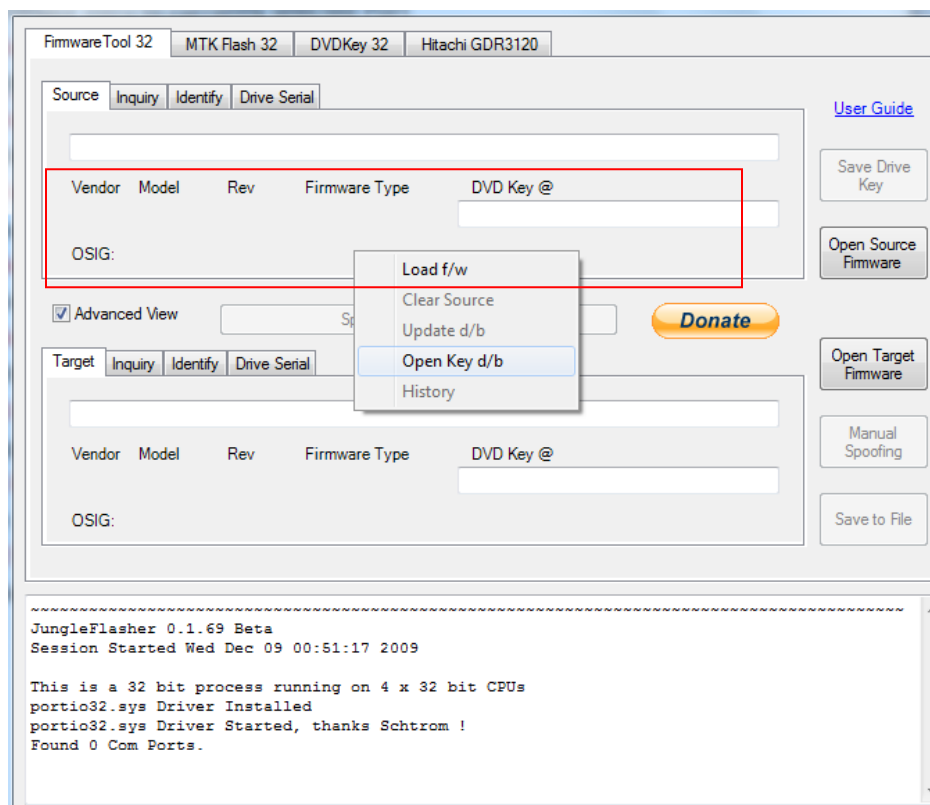

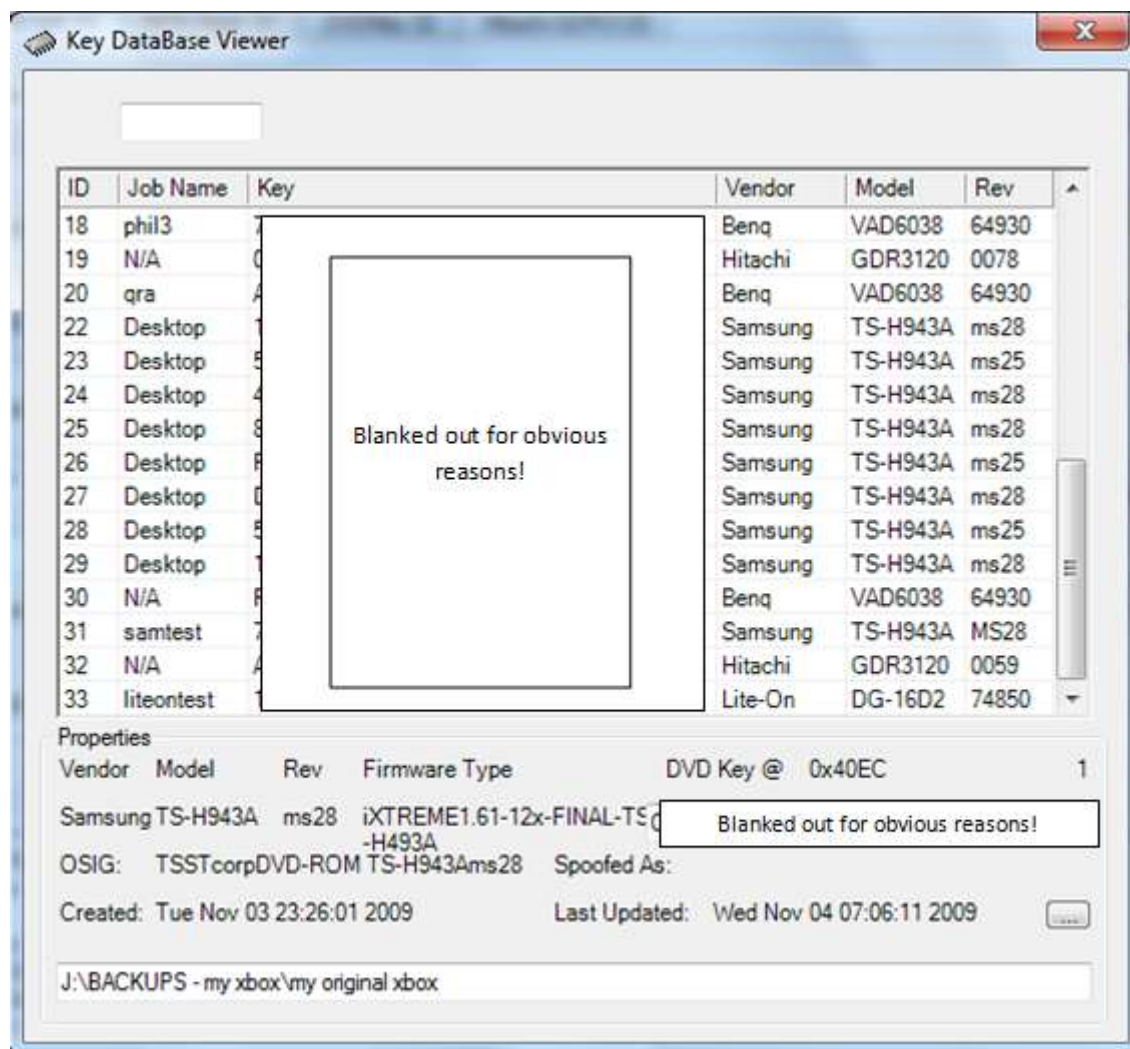

## Registry Settings


Only really for troubleshooting and debugging and should only be attempted by those confident enough to play about in the systems registry settings

Click **Start**, click **run**, type **regedit** and press **enter**

Navigate to **HKEY\_CURRENT\_USER**

Click on **JungleFlasher**

You will see something similar to this:

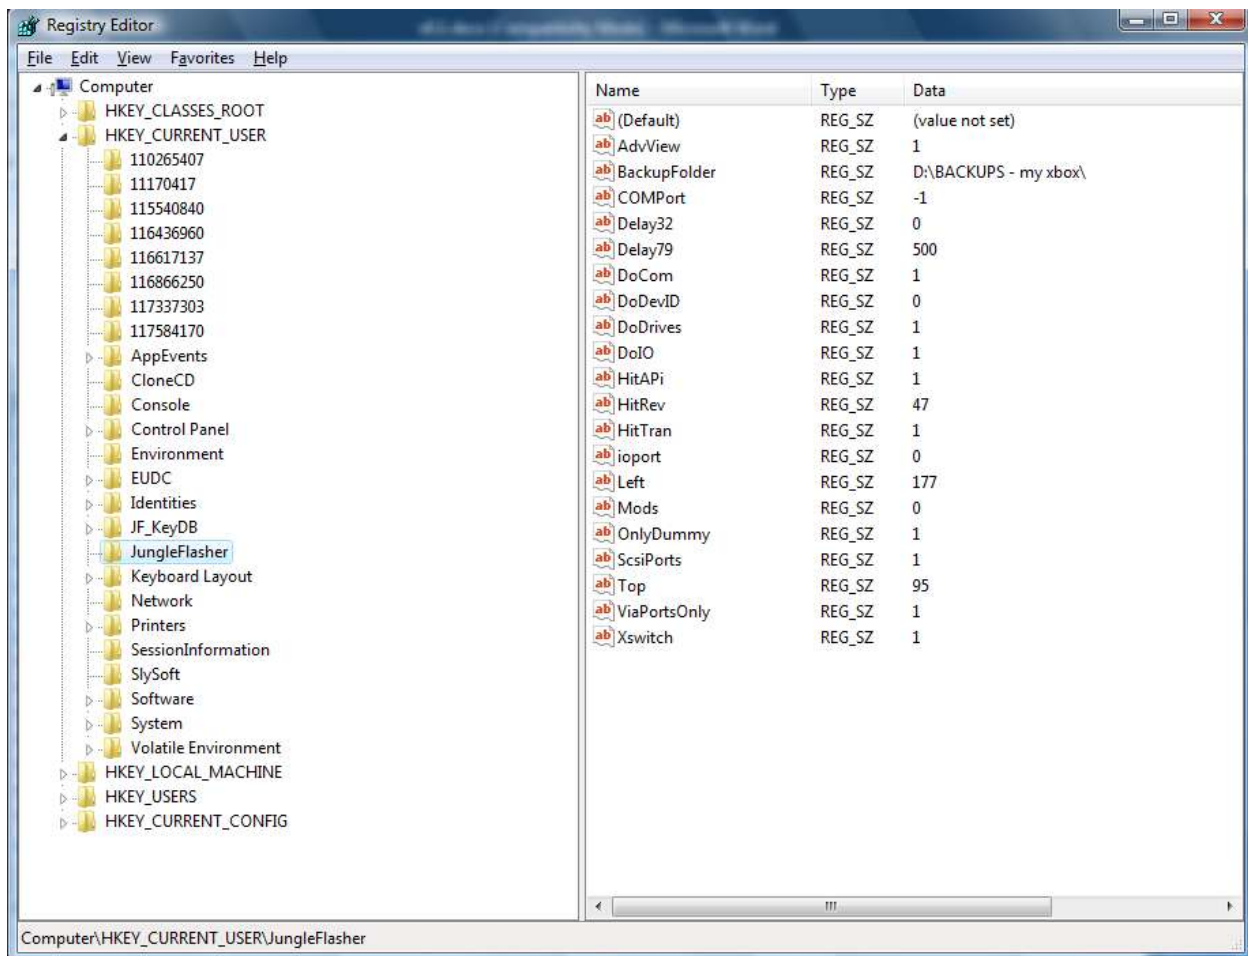




- **Adview** - Remembers whether **Advanced View** was selected or not
- **BackupFolder** – Contains the location set for backup folder for modder mode (blanked if modder mode not set)
  - **COMPort** - Remembers last COM Port selected, number represents position in drop down menu
- **Delay32** – timed delay between clicking dvdkey32 and running the command, to allow time to probe r707 (milli-seconds)
  - **Delay79** – a set time delay used in the 79unlock command (milli-seconds)
    - **DoCom** - Enumerates comports, for debug use only
    - **DoDevID** – Will send Intro if drive reports as in **Vendor Mode**
    - **DoDrives** - Enumerates drive letters, for debug use only
    - **DoIO** - Enumerates I / O ports, for debug use only
    - **HitAPI** – Remembers if WinAPI is selected (1 yes, 0 no)
    - **HitRev** – Remembers last drive revision selection
    - **HitTran** - Remembers last Tranfer Method selection
- **IOPort** - Remembers last IO Port selected, number represents position in drop down menu
  - **Left** - Remembers postion of JungleFlasher window (left hand side)
    - **Mods** – Counter for CTRL + F7 operations
  - **OnlyDummy** – Remembers if Dummy.bin only is enabled
  - **ScsiPorts** - enumerate SCSIAdapter IO ports also (NON-IDE)
  - **Top** - Remembers postion of JungleFlasher window (Top)
- **ViaPortsOnly** - enumerate only Via IO ports, for safety (Value 1) Lists all if removed or Value 0
  - **Xswitch** – Remembers if USBxtractor switch is enabled

**In addition to the above registry settings – the key database is also stored in registry!**

In the same area of registry is a folder called **JF\_KeyDB** which if selected looks something like this!

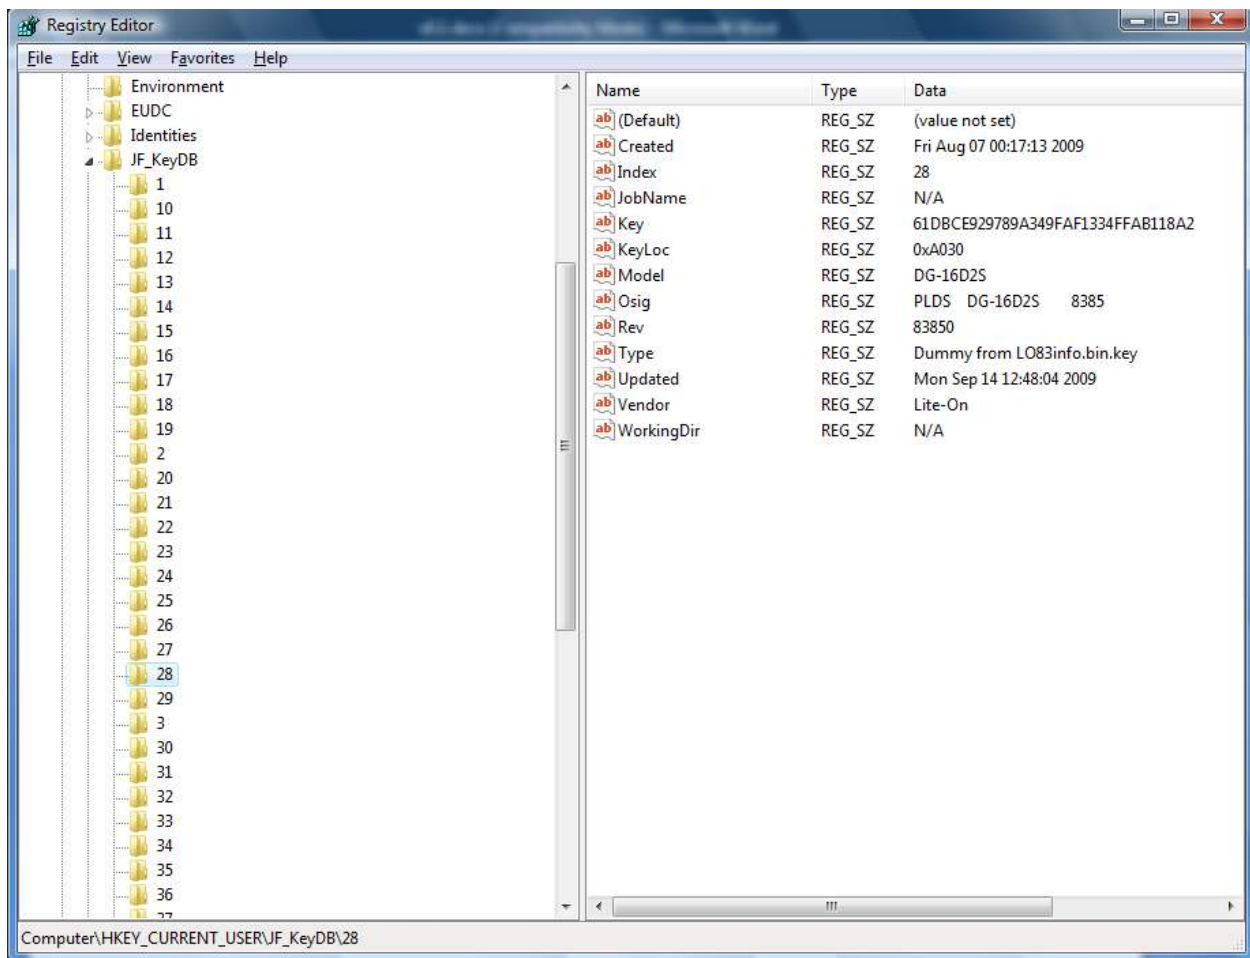

If you select a numbered folder it will display all the details of that particular dumped/loaded FW file. The entries are fairly self explanatory.

[CLICK HERE TO RETURN](#)

## Common problems and Frequently Asked Questions

### JungleFlasher tells me “Cant install portio32/64.sys driver”

If you are running any OS other than XP x86, then you must run the program as Administrator, see [here](#) for explanation how!

### JungleFlasher tells me “No Com ports found during enumeration”

The LiteOn DG-16D2S 74850c Drive requires the utilization of an RS232 Serial Adapter to obtain the DVD Drives key. Unless you are doing one of these drives, simply ignore it and proceed.

### JungleFlasher warns me of “No VIA Ports Found”

Due to quirky issues with some VIA Motherboards with VIA PCI SATA Cards, causing JungleFlasher to fail to load, we’ve forced via ports only as default. This, for those without a VIA PCI SATA card, or VIA motherboard will get this warning.

If you do not have a VIA PCI card or a VIA Motherboard, proceed to the **DVDKey32 Tab**, and ensure **Non-IDE Ports is checked**. You will no longer get the warning when running JungleFlasher.

### JungleFlasher cannot see my drive

There are multiple causes to this, so first of all ensure **VIA Ports Only** is unchecked and **Non-IDE** is checked under the **DVDKey32 Tab**.

If using RAID, it will cause issues. Set it to Native IDE / Disable AHCI (Intel) / Raid in your computers BIOS.

Use a Primary SATA port where possible.




If using a VIA card ensure you use the correct port

If problems persist, please join us in the support channel [HERE](#)

### JungleFlasher doesn't see my DVD Drive (cont)

Quite a few users believe JungleFlasher will report their Xbox 360 DVD Drive being Present in the Running Log:

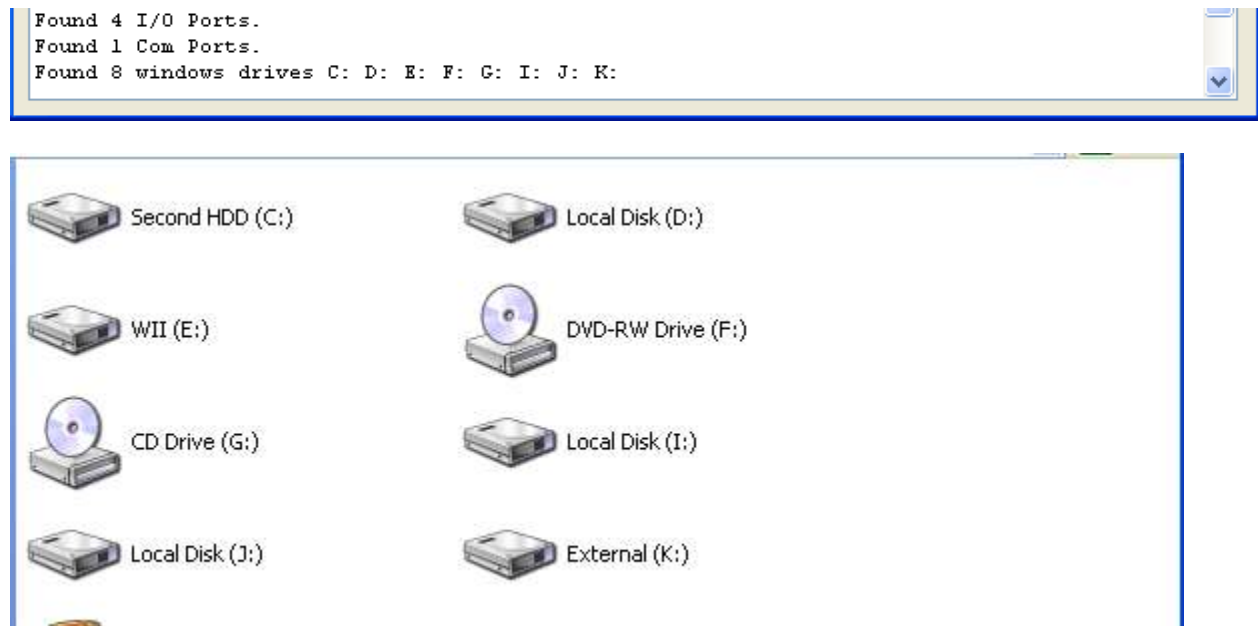

JungleFlasher will only show drives that have been assigned a drive letter in windows.

The only 360 DVD Drive that has this during the process is the Hitachi Drives (Once in mode-b) and using WinAPI. Please, don't be surprised if JungleFlasher doesn't enumerate your DVD Drive.

### I keep getting **\*\*Warning Serial Data is Bad\*\*** Errors when trying to DVDKey my LiteOn

Is it definitely a **74850c** version? The **83850c V1** uses **LO83Info** instead.

If this is the case, there are several things you will need to check.

Are you probing the R707 hole?

Using the USB connection from your CK3/Xtractor? if so check their websites for installation instructions (i.e. installing USB etc)

Using the Serial cable, double check this is connected properly.

Is the tray half in? You can check the [User Guide](#) on how to do this. Without the tray half in, you will get this error.

Is the Probe/Spear connected properly, have the correct lights? Double check these connections.

Using a home-made? Well unfortunately we can't troubleshoot this for you, if you choose the home-made method it's your responsibility.

**Never rule out the possibility of one of the cables being faulty. If you have tried all of the other checks, then try using alternative cables.**

### **My Maximus power adapter doesn't eject**

This is a common one and deceives every user of the kit. You must keep eject pushed in for the drive to eject. Letting go will close the tray back over.

### **I don't know what SATA Chipset I have**

Download this program **CPU-Z** [HERE](#) and install it. Once installed, run the application, click on the **Mainboard Tab**. Your SATA Chipset is listed under **Chipset**.

### **I got an x/y when reading/writing/verifying my drive.**

One, or a couple of instances is fine, JungleFlasher retries and as long as you have the **16 dots** and **Write Verified OK!** It's fine.

### **I have an xxxxxxxx Drive but JungleFlasher sees it as yyyyyyyy**

This is more than likely a Spoofed Drive. This is where a manufacturer of one drive, is used in place of a different manufacturer's drive.

The Xbox 360 checks what DVD Drive is in there using the drives OSIG. If this doesn't match, the console will report E66.

To overcome this, we can change one string in the drives Firmware, making one drive, report as the other, this fools the Xbox 360, but has an adverse affect with JungleFlasher as it will also report as the "other" drive.

Just treat it as the drive it really is, so if it is physically a Samsung, unlock it like a Samsung, write Samsung Firmware too it (with spoofed OSIG)

### **I LiteOn Erased my LiteOn and it failed / Device Intro Failed, now JungleFlasher won't detect my drive!**

Calm down, your drive isn't bricked! JungleFlasher tries to automate as much of the process as possible, making it seamless. This time, sadly, it didn't work.

All you need to do is manually do the process again, power cycle the Drive, then send a MTK Intro to the drive.

JungleFlasher Will **not** see the Drive (No Drive Detected) as it is actually, now erased.

### **I get "Drive Rev Undetermined... Aborting!" When trying to dump my Hitachi**

There are two main causes for this, the main one being a user trying to dump the drive using **WinAPI** but not having the correct drive selected in

the **Top Right** drop down box. Try closing JungleFlasher, scanning in Device Manager and reopening JungleFlasher.

The second is caused by trying to dump a **v79** that **hasn't been 79unlocked**

### **I've set Mode-B but my drive won't show in the drop down box.**

If using Windows Vista, or Windows 7, please close JungleFlasher, scan in Device Manager and re-open JungleFlasher, if this doesn't help, please leave your drive tray Ejected, and reboot your PC with **drive still powered and in Mode-B**. If the problem persists, please feel free to join the support channel and seek further assistance. [HERE](#)

If you are using PortIO option in Hitachi tab – It's not meant to!

### **My Xbox keeps turning itself off while I'm trying to flash my drive**

If you are using the Xbox to power your drive during flashing, you **MUST** have the AV cable plugged into the Xbox (other end does **NOT** need to be connected to TV), otherwise it will power down after a few minutes (disaster if you are flashing a Hitachi). The HDMI cable can be used instead but it **MUST BE** connected to the TV!

### **It keeps saying serial data missing? OMG what do I do?**

There is the option to rebuild the serial data from the serial numbers on the LiteOn case, laser and PCB. You can proceed and fill this data in IF YOU WISH! Go [HERE](#) for instructions on how. But – remember if the data is missing from the drive, do you really want to add it now? If it's a brand new drive that's not been touched before then it may be advisable to leave it!

### **I am trying to insert the unlock79 CD but I press twice to close and it opens again!**

This is fairly common, in mode B some drives take 3 presses of eject button instead of 2 to get the drive to stay closed!

### **Every time I connect my drive to my VIA card my PC slows down or freezes**

Try **reading** the tutorial.....! Remove your drivers for the card!

Instructions for how to do it properly are [HERE](#). OR in the less likely event that you have already correctly removed the drivers from the card and it still freezes – try moving your card into another PCI slot! (You may be required to reinstall drivers then remove using same method as before)

### **I just flashed my LiteOn – placed in a game and it doesn't work – OMG!**

Before you panic – try ejecting then closing, and then reboot the console! It's possible the tray wasn't fully closed when the console booted and 0800 mode was activated – causing an error!

### **In what sequence should I switch things on/connect things?**

Generally (apart from the occasional stubborn Hitachi drive) you should boot the pc, then connect the SATA, then power on the drive (by which ever method you're using, Xbox or kit!) then open JungleFlasher.

### **My VIA 6421 Raid Controller is showing up as a VIA 3249 controller?**

You installed the wrong drivers for the card! Go to [HERE](#) download the correct drivers install those – the drive will now show as VIA 6421 (now reboot) – Now return to [HERE](#) and remove them as previously instructed!

### **I didn't save my OFW, I lost my key – what can I do?**

Do not fear – Jungleflasher updates its key database on every dump carried out, right click on source box in **firmwaretool 32** tab. Select **Open Key d/b.** as shown [HERE](#)

### **During spoofing the firmware – I got “No Calibration data in source”?**

With the release of Jungleflasher 1.70, a section of data is now copied over starting from hex address 3C000 this data has been talked about as “calibration data” At the time of writing the data is considered to be manufacturing test data and is unused by the drive, but for completeness is



now copied over to your iXtreme firmware. This is shown in the running log at time of spoofing the firmware like:

```
Spoofing Target
DVD Key copied to target
Inquiry string copied to Target
Identify string copied to Target
Serial data copied from Source to Target
Calibration data copied from Source to Target
```

A full dump of your **VIRGIN drive** (not one that has been returned with other stock firmware) is the **ONLY WAY** to get the **ORIGINAL DATA** from your drive into the iXtreme LT firmware.

So IF your drive has been flashed before *please IGNORE the statement* that appears:

```
No Calibration data in source
```

As there is NOTHING you can do about it – it has been lost forever!

### **I've Dumped the OFW using MRA Hack and get "Parse Failed" on loading firmware**

There is a good chance you clicked "read" whilst the resistor is selected to GND (or in case of LT Switch – switch is in R/W position). After you have vendor mode put switch back to 3.3v (or "normal" – LT Switch) BEFORE pressing READ!

### **I've been banned from the [JungleFlasher support channel](#) wtf?**

You have obviously been bashing noobs, talking piracy or generally being obnoxious – the support channel doesn't tolerate that sort of thing! Start groveling and change your ways.

**[CLICK HERE TO RETURN](#)**

## **Additional Info for running JungleFlasher in VISTA/WIN 7 x64**

In VISTA and Win 7 it is a requirement that every driver must be signed. Because PortIO driver is NOT signed – it becomes necessary to work-around the Driver Signature Enforcement

There are 2 ways to do this.

One is simple but is required to be done every time you boot the pc and wish to use the driver!

The other, is a way of setting test mode to be selected upon every boot of the system

### **Easy Way of Disabling Driver Signature Enforcement**

- 1) On boot up press F8 to get to the extended boot options screen
- 2) Choose "Disable Driver Signature Enforcement"
- 3) To start JungleFlasher right click on it in Windows Explorer and choose "properties"/compatibility – tick "Run as administrator" > click "ok".  
(This will enable JungleFlasher to run as Administrator every time you run it)
- 4) If a "Program Compatibility Assistant" warning message is displayed whilst you run JungleFlasher, you can simply ignore this by pressing the "Close" button

### **Recommended Way of Disabling Driver Signature Enforcement**

#### **1) *Disable User Account Control (UAC) In WIN 7***

- go to "Start Menu" > "Control Panel" > "User Accounts and Family Safety" > "User Accounts"
- click on "Change User Account Control settings"
- set the slider bar to the lowest value (Never notify) > click "OK"

#### ***Disable User Account Control (UAC) In Vista***

- go to "Start Menu" > "Control Panel" > "User Accounts and Family Safety" > "User Accounts"

Click "Turn User Account Control on or off" > click continue, untick the box, click  
OK

## **2) Sign the portio.sys driver**

- download the "Driver Signature Enforcement Overrider" (DSEO) from  
<http://www.ngohq.com/home.php?page=dseo>
- start DSEO > click "Next" > "Yes" > choose "Sign a System File" > "Next" > enter the path to the used driver (portio32.sys or portio64.sys) > "OK" > "OK"

## **3) Disable Driver Signature Enforcement**

- start DSEO > click "Next" > "Yes" > choose "Enable Test Mode" > "Next" > "OK"

## **4) Restart the computer**

**[CLICK HERE TO RETURN](#)**

**JungleFlasher v0.1.74 beta**

**Thanks to:**

**c4eva & Team Jungle (Dedication & FW)**

**Schtrom (Legend in his own right)**

**Seacrest (Openkey)**

**Team Modfreakz (for all you have contributed!)**

**MRA (☺)**

**Team - Xecuter**

**&**

**The Testers (well, obviously for testing)**

**[CLICK HERE TO RETURN TO STARTING POINT](#)**